

MEBS6020 Sustainable Building Design

<http://www.hku.hk/bse/MEBS6020/>



Sustainable Building Concepts (II)



Dr. Sam C. M. Hui

Department of Mechanical Engineering

The University of Hong Kong

E-mail: cmhui@hku.hk

Aug 2014


Contents



- Urban and site design
- Energy efficiency
- Renewable energy
- Building materials
- Water issues
- Indoor environment
- Integrated building design




Urban and site design

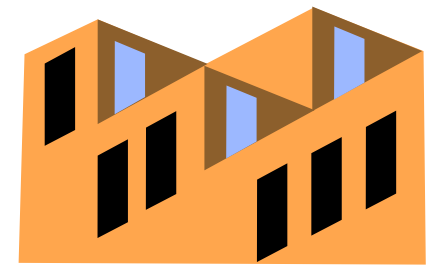

- Planning of development at different scales
 - Building, blocks, district, city/town, region
- Good urban design ensures economically viable places and spaces that are:
 - Resource efficient
 - Adaptable
 - Durable
 - Inclusive
 - Fit for purpose



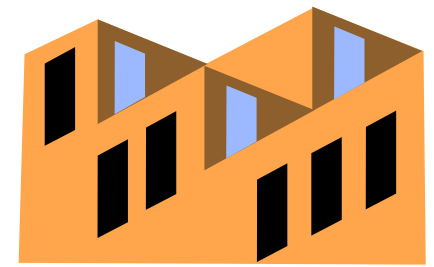

Urban and site design


- Sustainable urban design should consider:
 - Spatial form
 - Movement
 - Design & development
 - Energy
 - Ecology
 - Environmental management
- Goal: to create livable cities





SPATIAL FORM

- ◆ Reduce / reverse decentralisation
- ◆ Increase densities but not excessively to encourage compact forms (neither cramming nor sprawl)
 - ◆ Increase appeal of inner areas (greening, defensible space, housing type, etc.)
 - ◆ Encourage mixed-use developments
- ◆ Density related to nodal points / public transport
- ◆ Relate to existing infrastructure (utilities and roads)
- ◆ Develop brown field sites and avoid green field sites
- ◆ Relate built and natural environments (open space provision, green space networks, etc.)
 - ◆ New settlements to be self sustaining
 - ◆ Assess environmental capacity



ENVIRONMENTAL MANAGEMENT

- ◆ Co-ordinate statutory authorities
- ◆ Encourage urban management (support cleanliness)
 - ◆ Reduce pollution and polluted sites
- ◆ Re-educate professionals, public and politicians
- ◆ Economy of means as the overriding goal



MOVEMENT

- ◆ Reduce the need for travel
- ◆ Design for pedestrianisation / environmentally friendly transport
- ◆ Recover road space for public use or public transport
 - ◆ Exclude non-essential traffic
 - ◆ Minimise car parking
- ◆ Encourage route connectivity and permeability
 - ◆ Tame traffic flows

SUSTAINABLE URBAN DESIGN



ECOLOGY

- ◆ Assess ecological value of sites and encourage continuity
- ◆ Protect natural assets and preserve landscape (individuality)
 - ◆ Maximise bio-diversity
 - ◆ Increase rainwater retention (tree planting)
- ◆ Reduce run-off (permeable paving, natural channels)
 - ◆ Preserve individuality of landscape character
 - ◆ Green towns and cities




DESIGN & DEVELOPMENT

- ◆ Rehabilitation rather than redevelopment
 - ◆ Recycling of materials
 - ◆ Use local materials
- ◆ Environmentally friendly materials / techniques
 - ◆ Protection of built heritage
- ◆ Show openness to sustainable architectural forms
- ◆ Recommend BREEAM and NHER procedures
 - ◆ Encourage robust building forms (adaptable and resilient)
- ◆ Visual quality and appropriateness
 - ◆ Preserve local distinctiveness



ENERGY


- ◆ Passive solar gain (orientation, design, layout)
- ◆ Renewable energy sources (solar, hydro, wind)
 - ◆ Accept responsive facades
 - ◆ Encourage energy conservation
- ◆ Microclimate (discourage development on exposed sites and use natural features)
 - ◆ Encourage use of natural daylight
 - ◆ Discourage air-conditioning and encourage natural ventilation

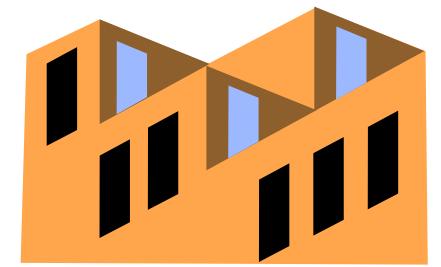

Urban and site design

- Basic principles


- 1. Increase local self-sufficiency
- 2. Concern for human needs (social+community)
- 3. Develop energy-efficient movement networks
- 4. The open space network (公共空間)
- 5. Linear concentration
- 6. An energy strategy
- 7. Water strategy

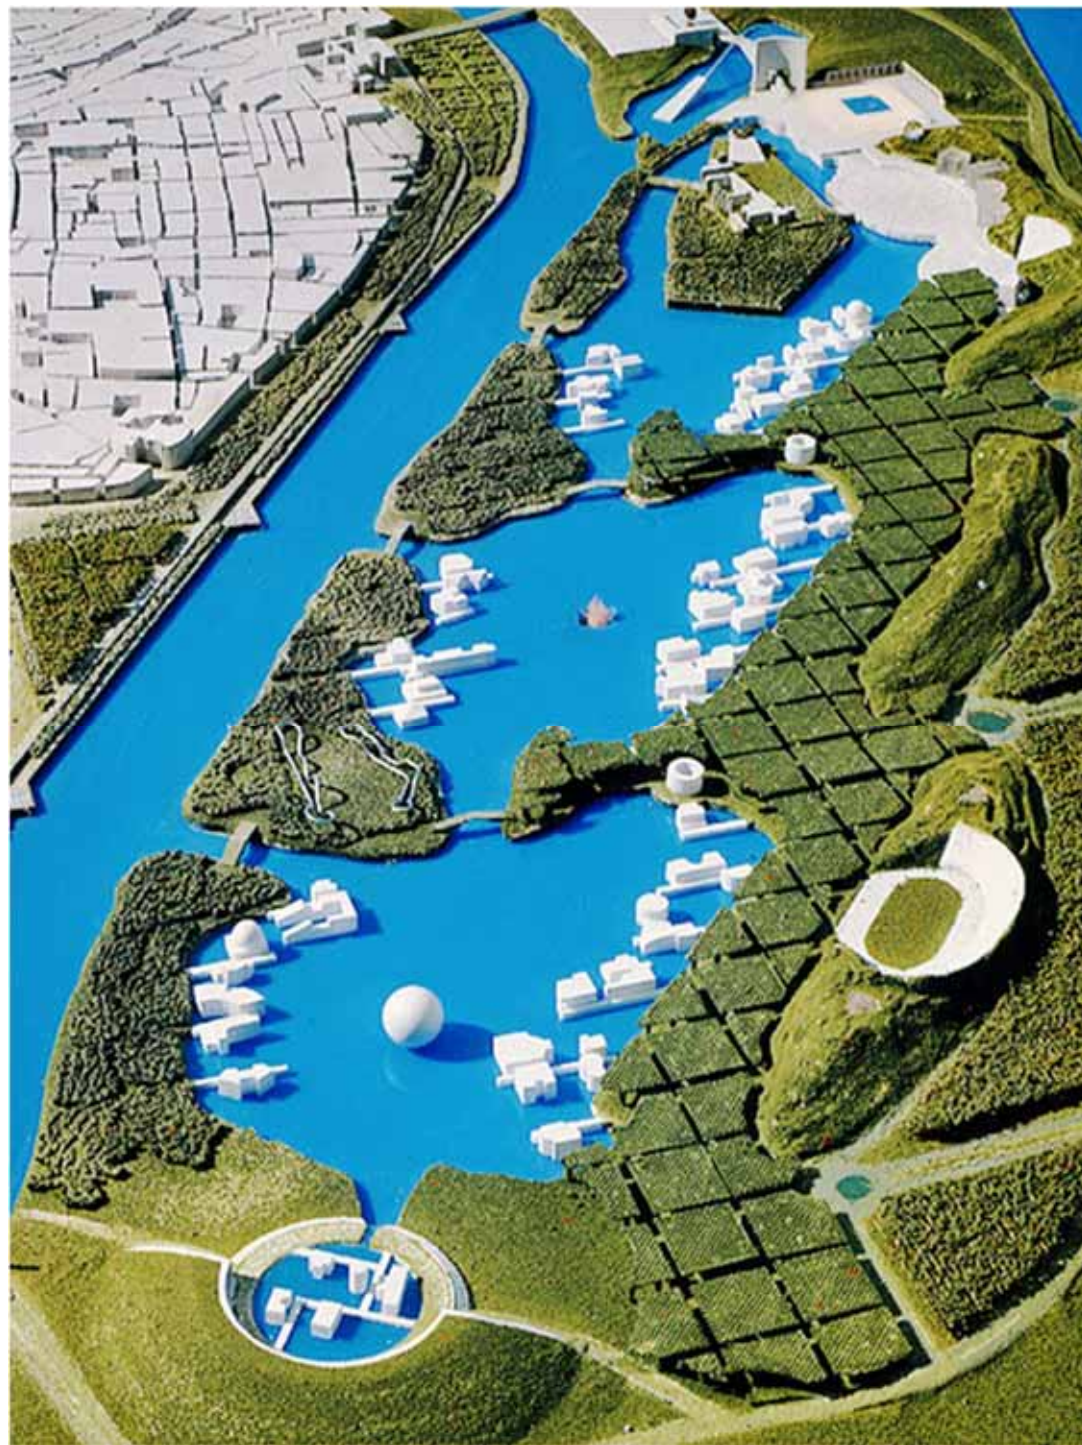

Master plan of
EXPO'92, Seville,
Spain (designed by
Emilio Ambasz)

- The pavilions were
removed after the
EXPO leaving only
the garden park to the
city and buildings for
the local university.


Further info: http://en.wikipedia.org/wiki/Seville_Expo_%2792

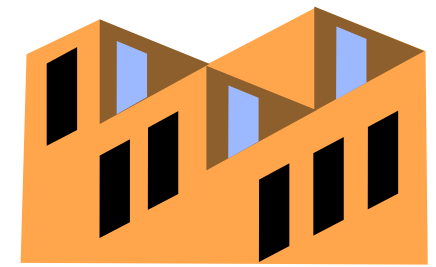

Urban and site design

- Design issues:
 - Site selection (e.g. prefer brownfield site*)
 - Promote efficient movement network & transport
 - Control & reduce noise impacts
 - Optimise natural lighting & ventilation
 - Design for green space & landscape
 - Minimise disturbance to natural ecosystems
 - Enhance community values

[* Brownfield sites are abandoned or underused industrial and commercial facilities available for re-use.]

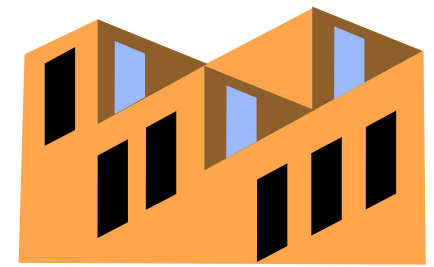

Urban and site design


- Design strategies
 - Integrate design with public transportation
 - Quite successful in Hong Kong
 - Promote mixed use development
 - Such as residential + commercial
 - Respect topographical contours (land forms)
 - Preserve local wildlife and vegetation
 - Make use of landscaping and planting (green space) to modify the local micro-climate

風

Wind

光

Light

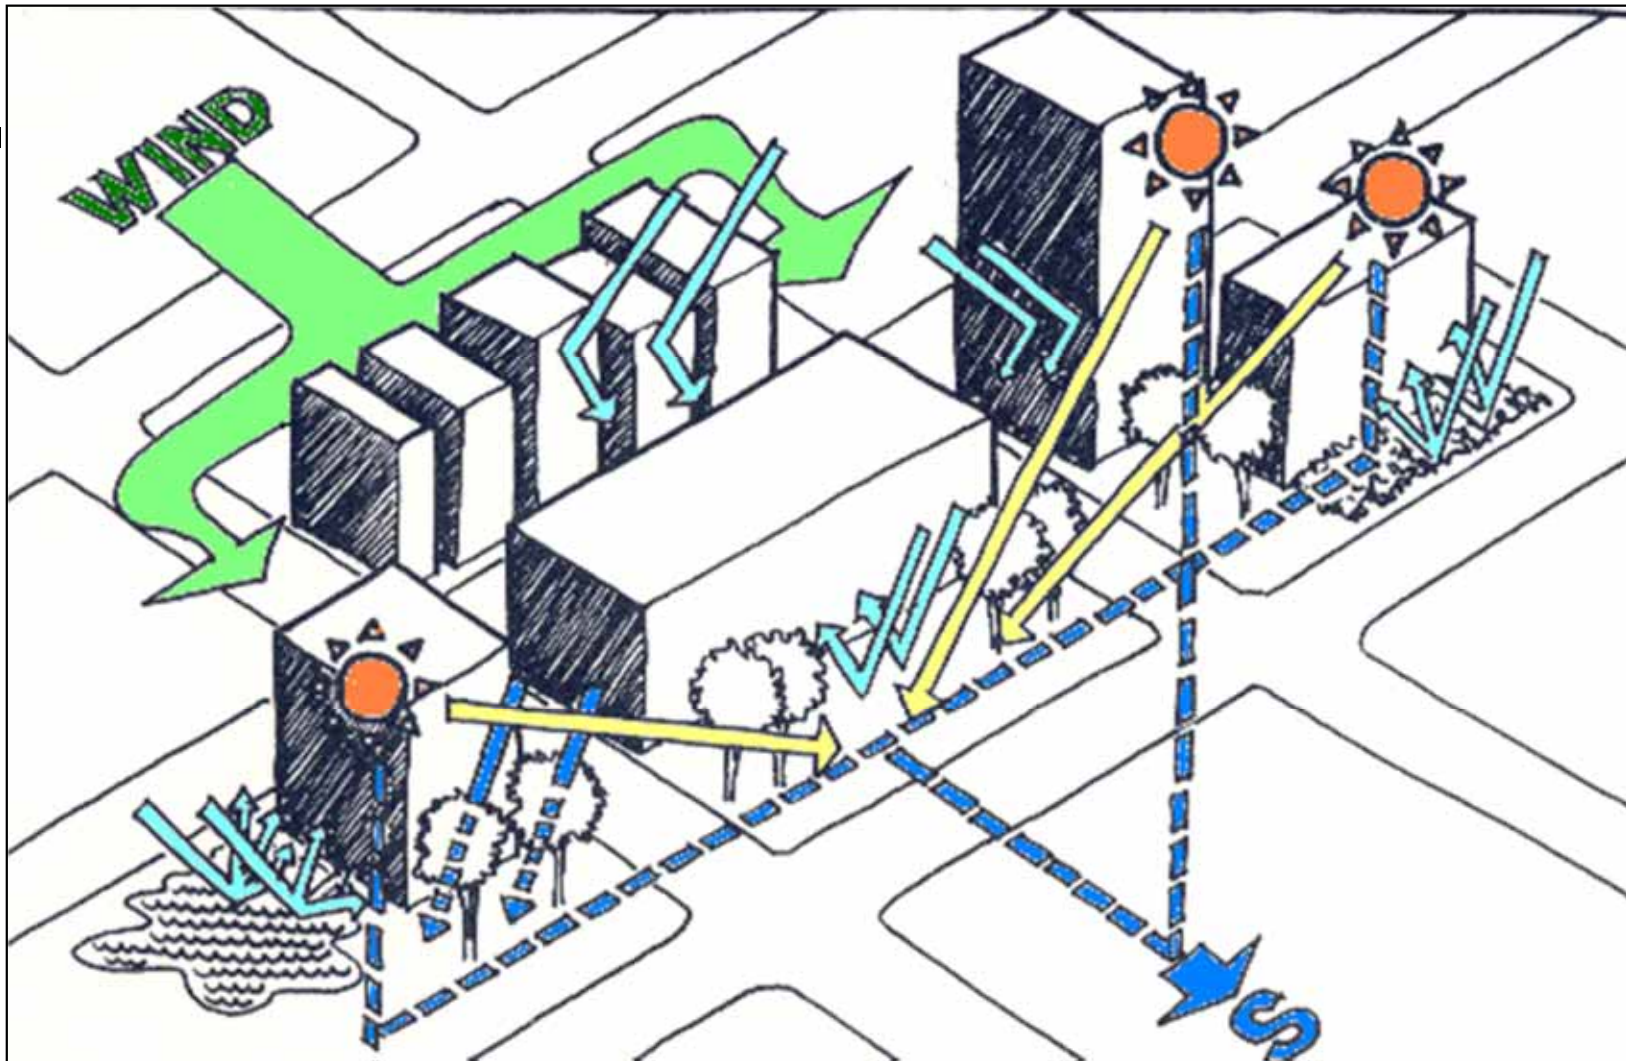

水

Water

物

Matter

Site analysis and understanding of the environmental factors is important

Energy efficiency



- The need for **energy efficiency**

- Economics

- Energy costs and operating costs

- Environment

- Climate change, global warming, air pollution


- Energy security

- Energy supply (political and economic reasons)

- Resources depletion

- Oil, gas and coal will be used up



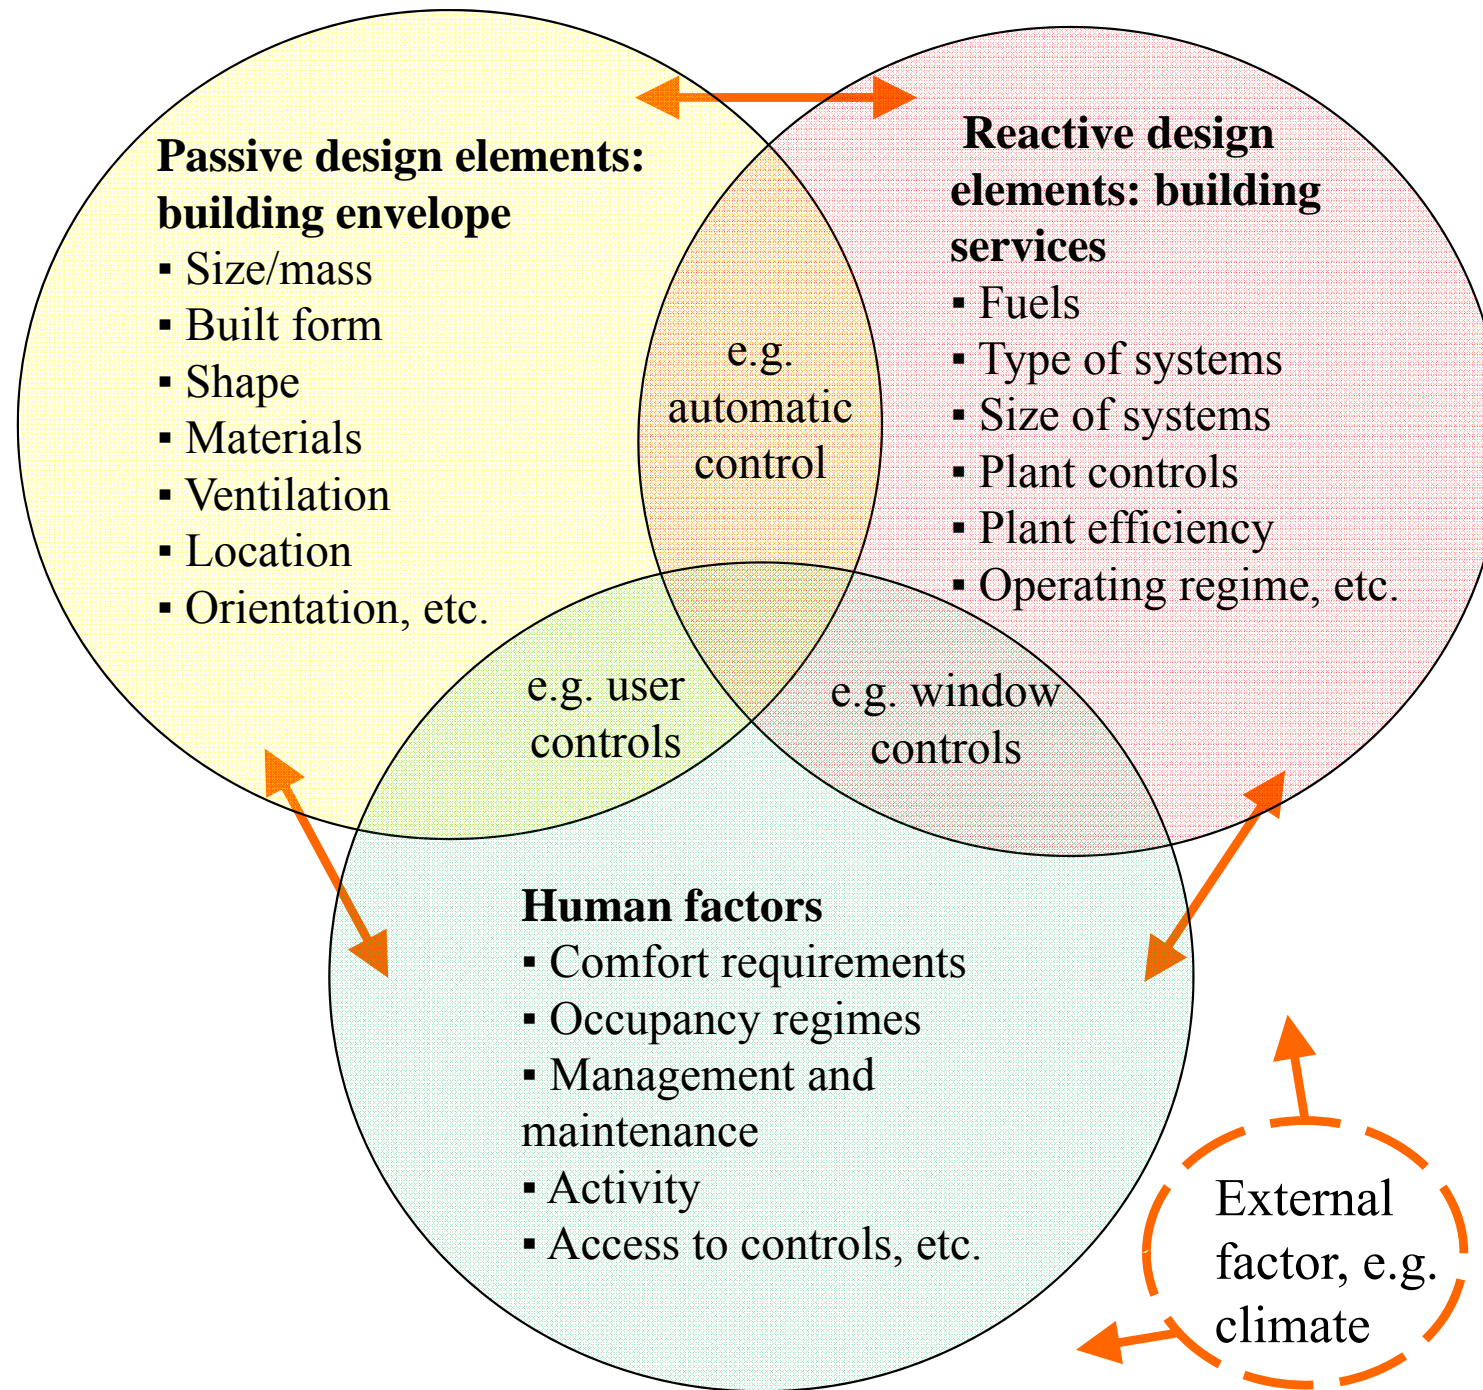

Key factors influencing energy consumption

(Adapted from Energy Efficiency in Buildings: CIBSE Guide F)

Energy efficiency



- Building energy efficiency codes
 - Building envelope, such as:
 - HK-OTTV standard
 - Overall thermal transfer value (OTTV)
 - Codes of Practice for building services systems
 - HVAC, lighting, electrical, lifts & escalators
 - Performance-based building energy code
- Become mandatory in 2011 in Hong Kong, under the Buildings Energy Efficiency Ordinance





Energy efficiency

- Promote passive design and natural ventilation
 - e.g. bioclimatic buildings, passive cooling/heating
- Adopt energy efficient building services systems
 - Lighting, air-conditioning, electrical, lifts
- Needs to study thermal & energy performance
 - e.g. by computer simulation or energy audit
- Must also ensure efficient operation and management of the building
 - User education & awareness, good housekeeping

Good design practices

Integrated & total energy approach

Efficient systems



Energy Efficient Building


Good house-keeping

User education & awareness

Efficient operation

External climate


Internal loads

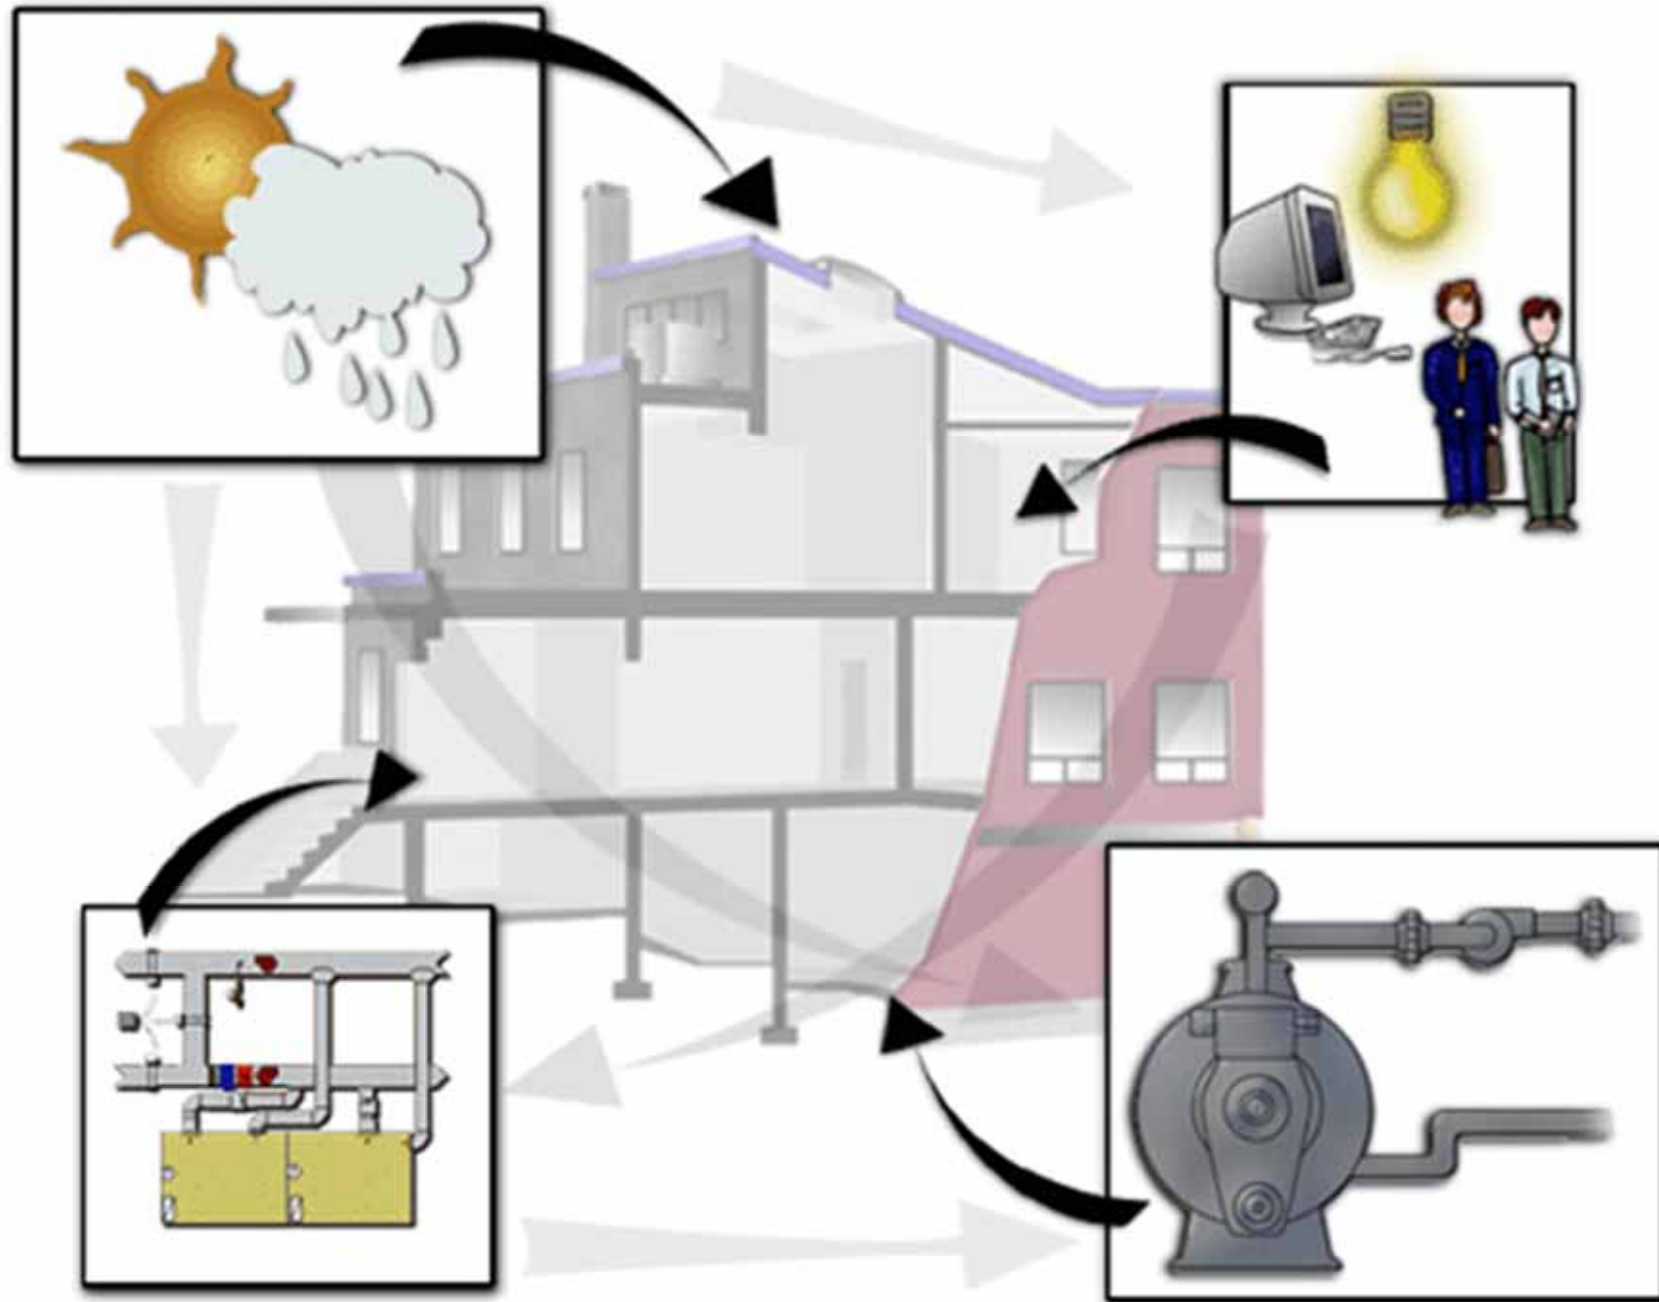

HVAC systems


HVAC plants

HVAC = heating, ventilation and air conditioning

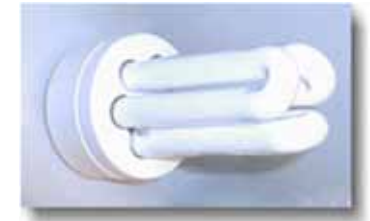


Energy efficiency


- Design strategies:



- Minimise thermal loads & energy requirements
 - e.g. by reducing heat gains from equipment



- Optimise window design & fabric thermal storage
 - Integrate architectural & engineering design




- Promote efficiency in building services systems
 - Use of heat recovery & free cooling methods
 - Energy efficient lighting design & control
 - High-efficiency mechanical & electrical systems



- Adopt total energy approach (e.g. district cooling, combined heat & power)


Strategy: reduce thermal loads

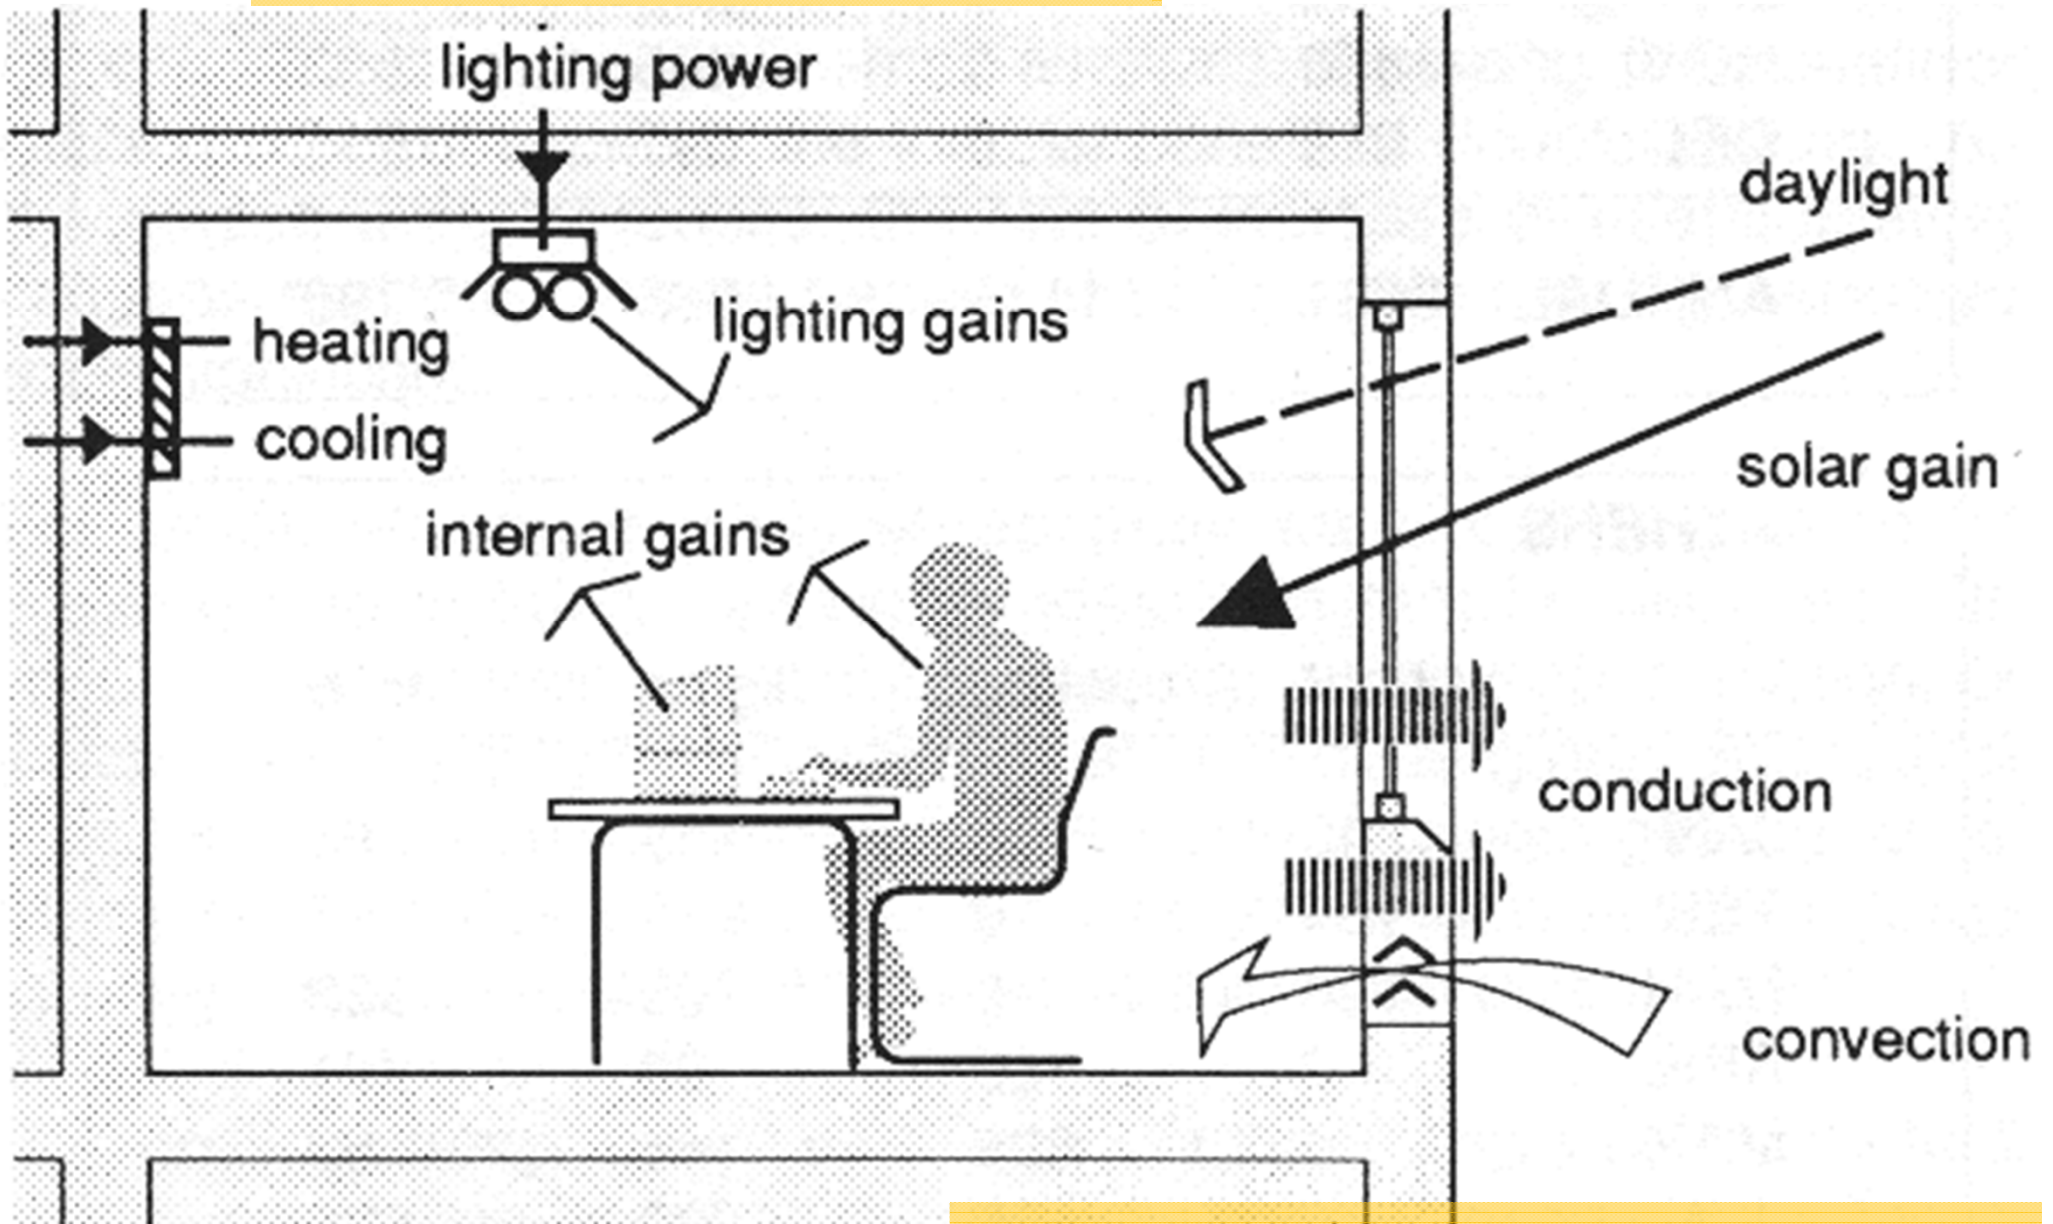


Strategy: optimise building envelope

Thermal energy balance in a building space

Strategy: use of heat recovery

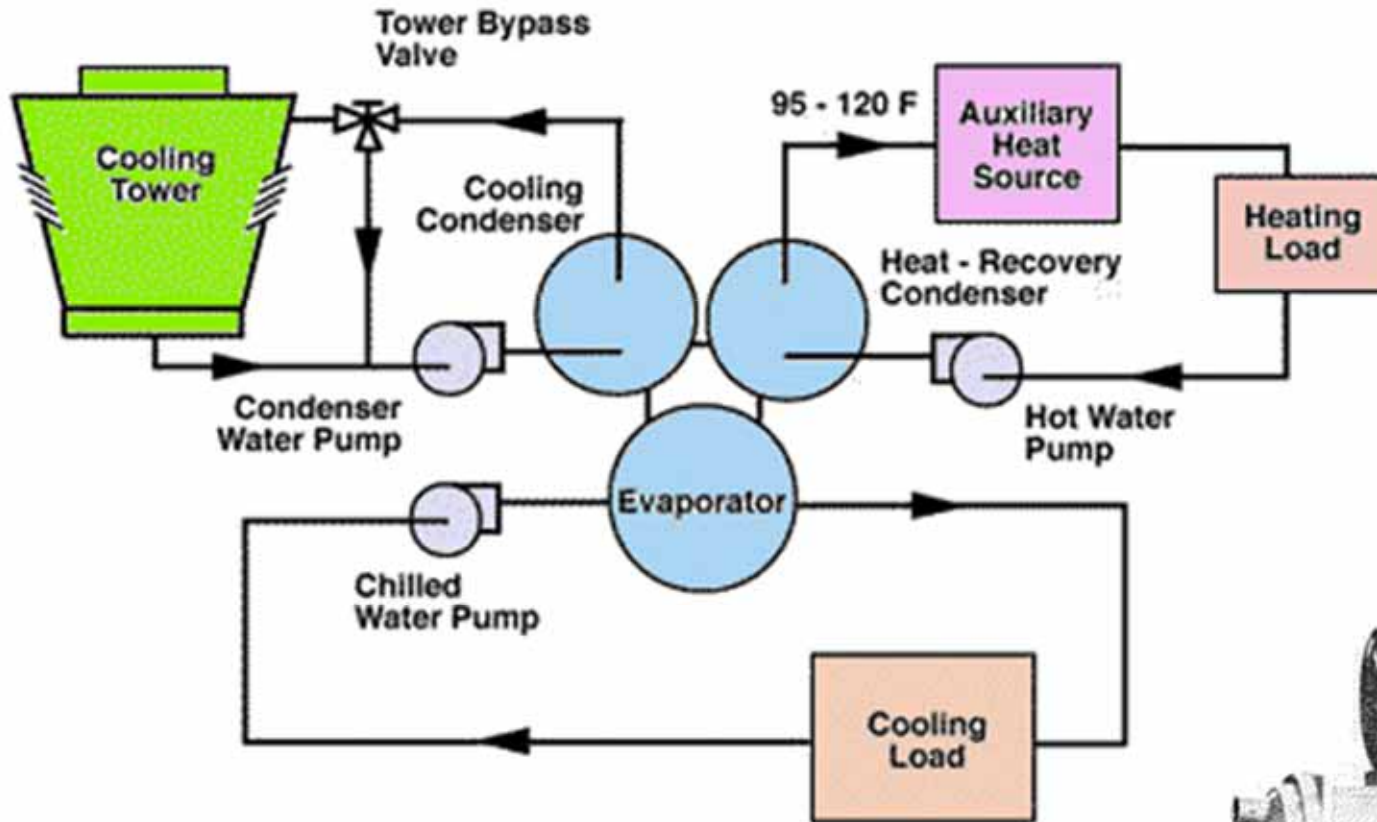


Produce hot water or heating

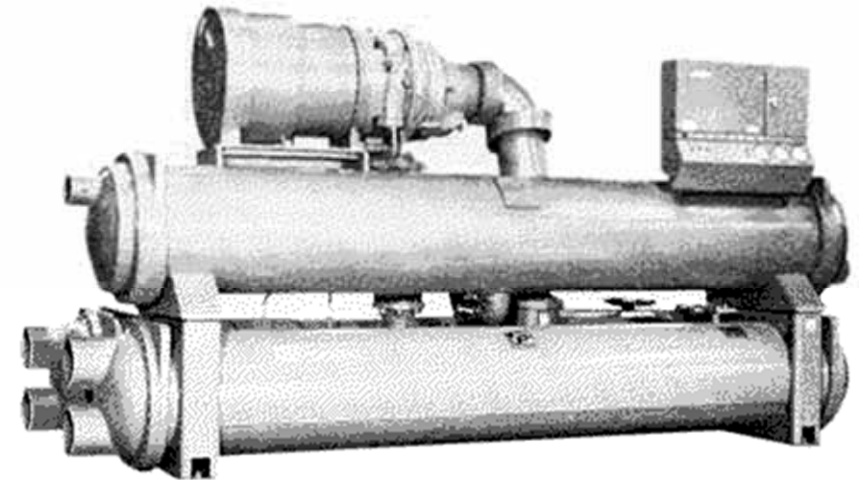

Double bundle heat recovery chiller

Waste heat recovery - double bundle heat recovery chiller


District Energy

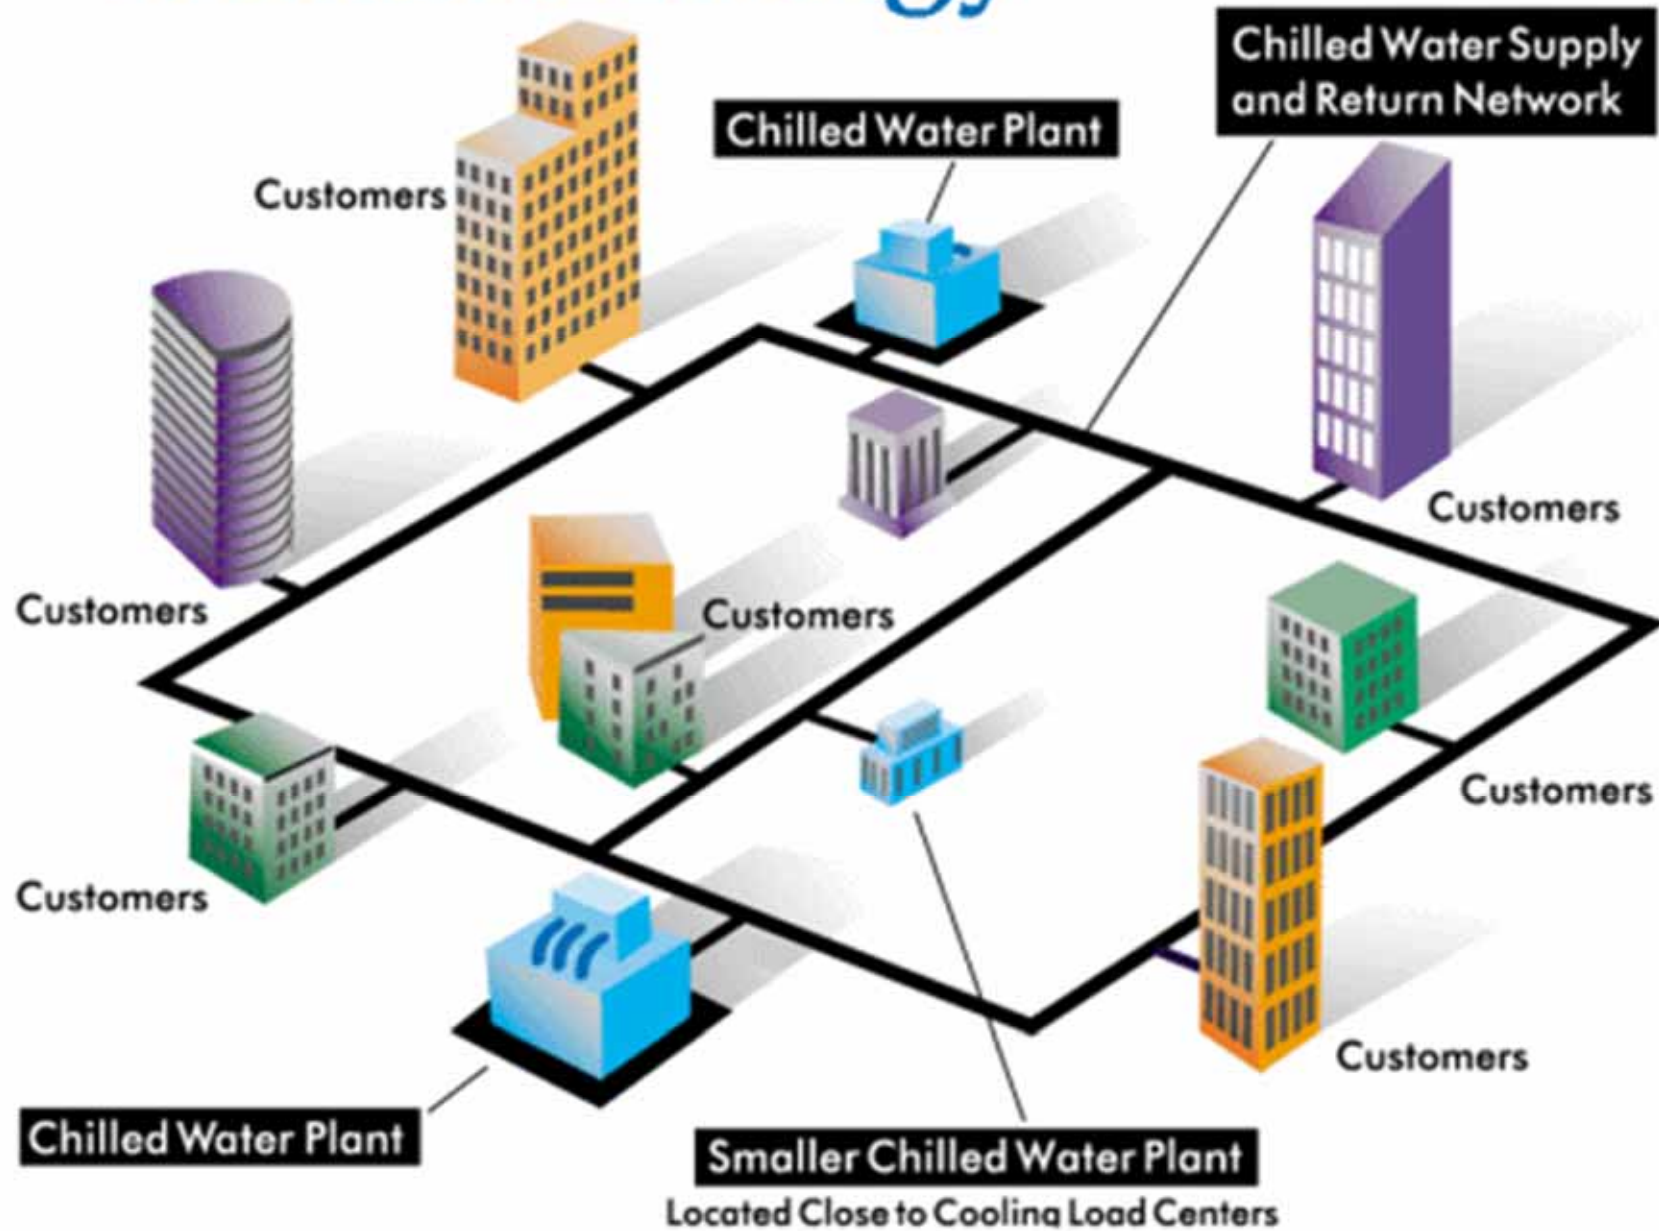



Renewable energy

- Energy that occurs naturally and repeatedly on earth and can be harnessed for human benefit, e.g. solar, wind and biomass
- Common applications
 - Solar hot water
 - Solar photovoltaic
 - Wind energy
 - Geothermal
 - Small hydros

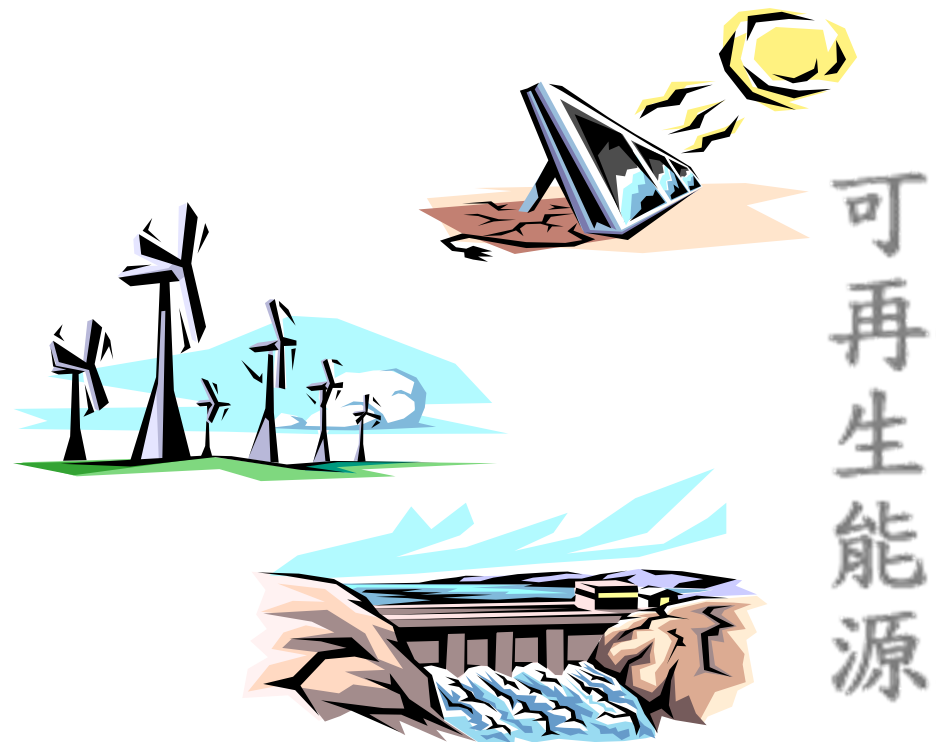




Solar heating for a swimming pool complex in Kwai Chung (313 sq.m solar collectors)

Solar hot water system at Sheung Shui Slaughter House (882 sq.m solar collectors)



Solar thermal systems in Hong Kong

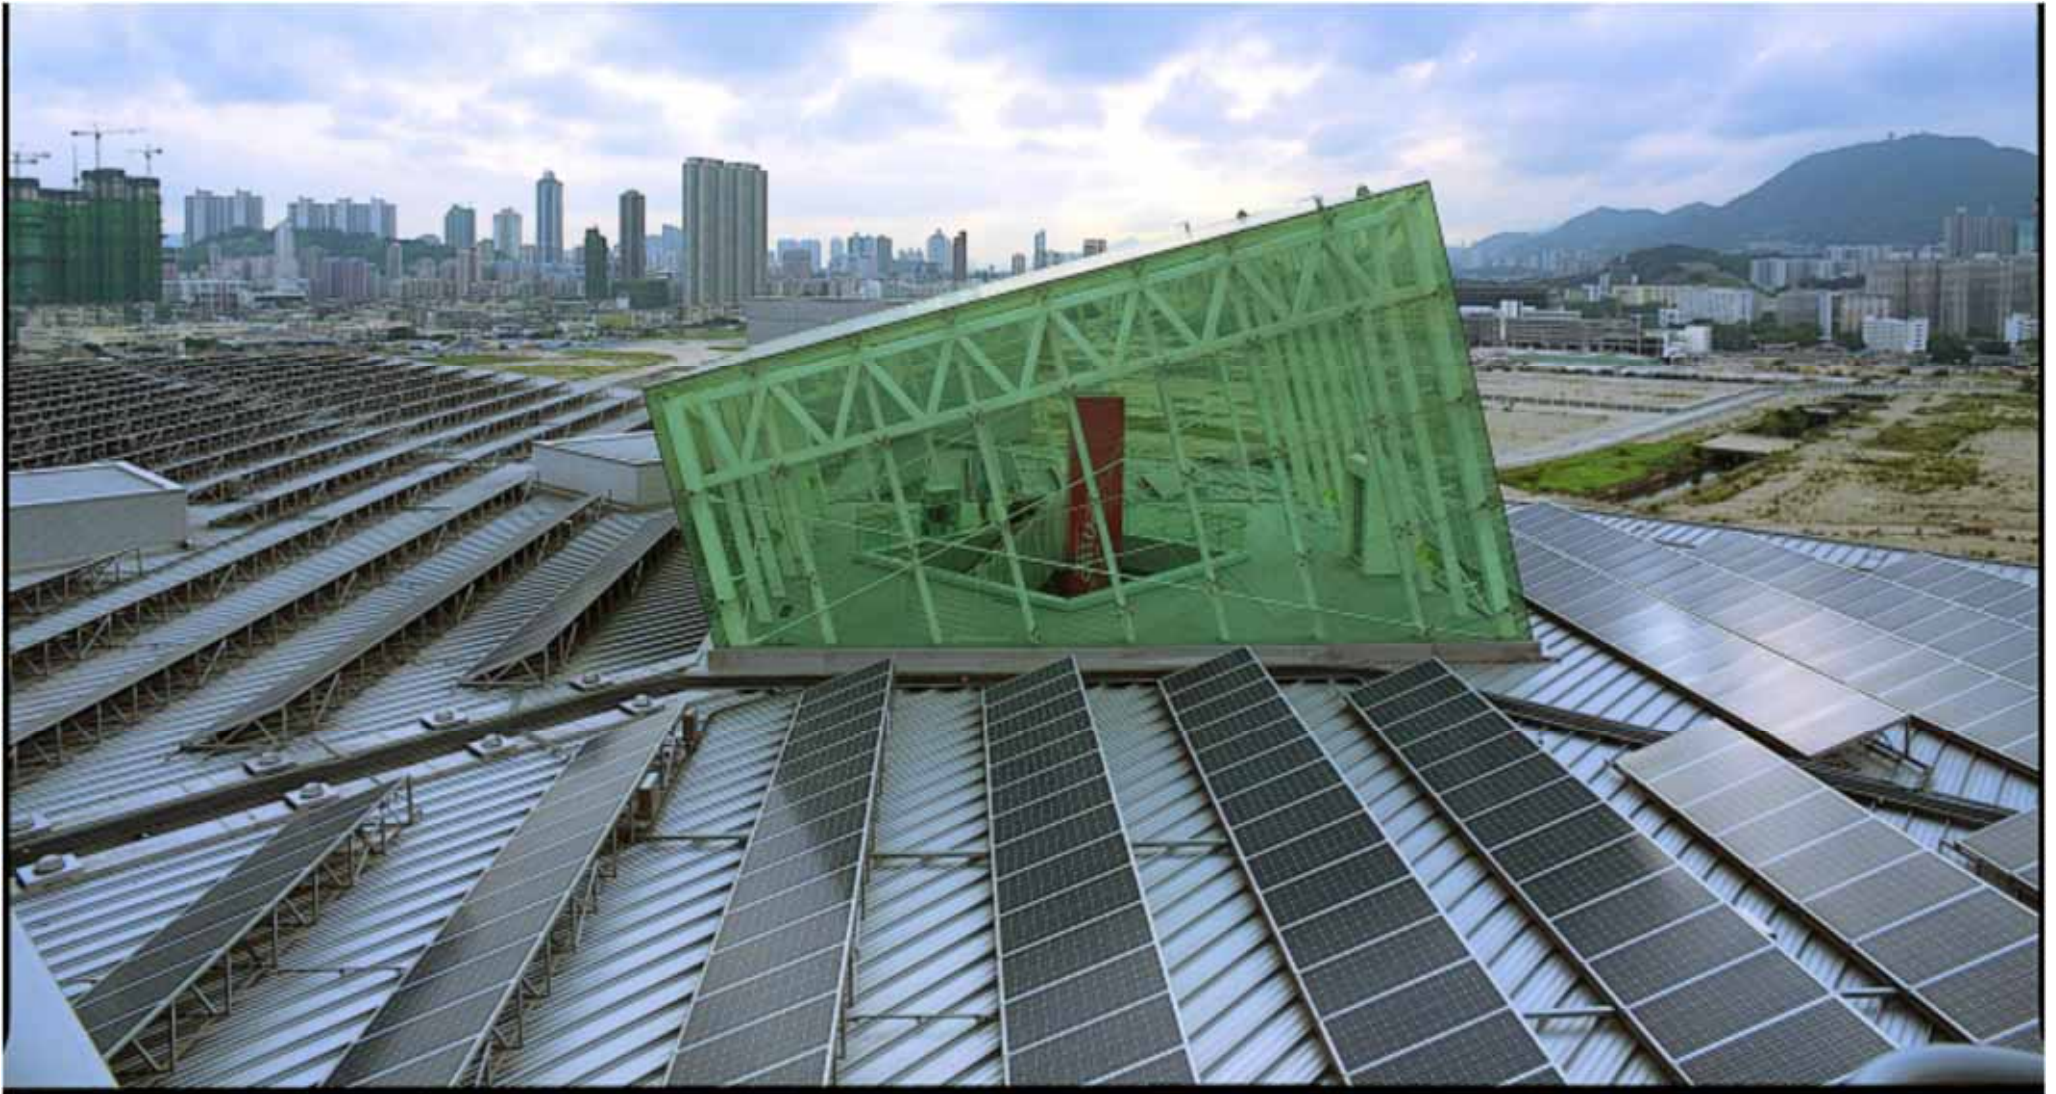

A 350 kW solar photovoltaic (PV) installation installed on the roof of the EMSD Headquarters in Kowloon Bay (2,300 PV modules with a total area of 3,180 sq.m) [Source: EMSD]




Solar PV systems in Hong Kong Science Park

Renewable energy



- Renewables for buildings
 - Solar energy
 - Passive (low energy architecture)
 - Active (solar thermal)
 - Photovoltaics
 - Other renewables
 - Wind (using buildings to harvest wind energy)
 - Geothermal (e.g. hot springs)
 - Small hydros (e.g. water wheels)
 - Hybrid systems (e.g. PV + wind + diesel)

多 因
能 地
互 制
补 宜
。

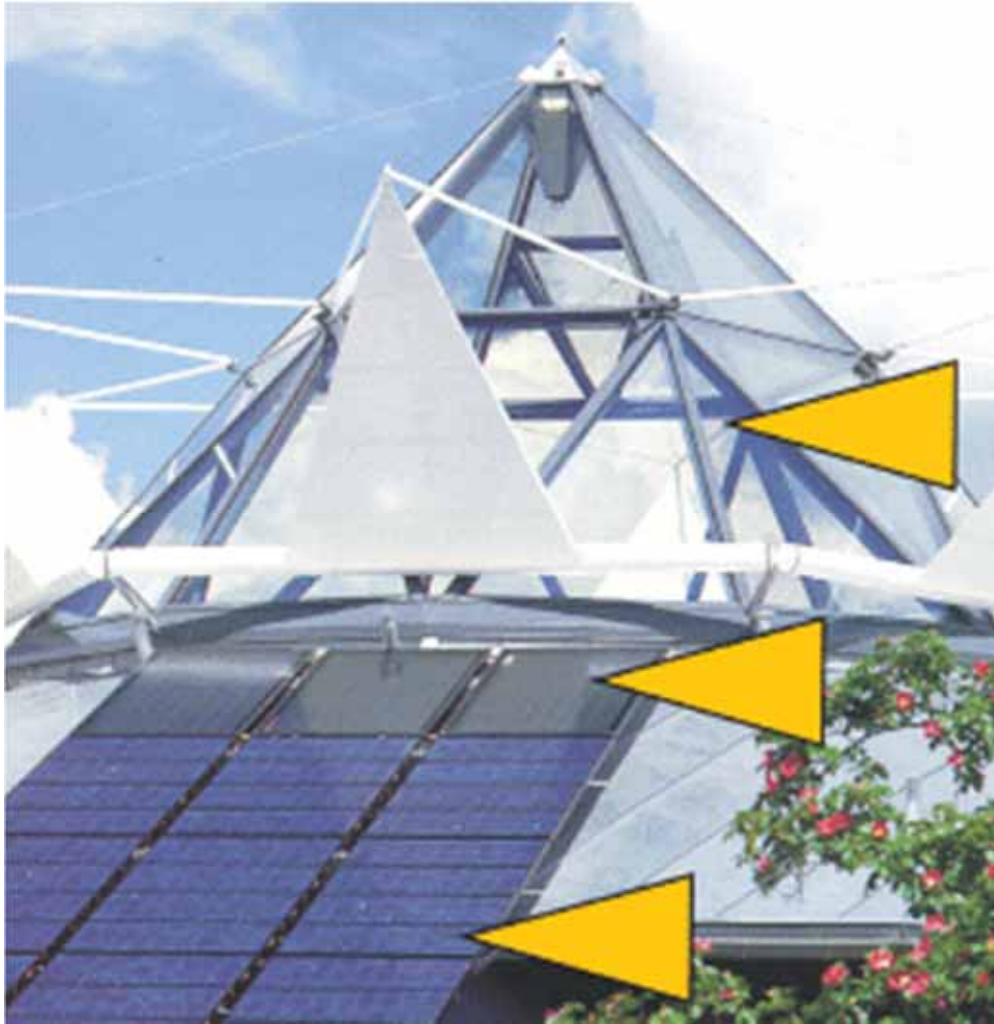

Passive solar (e.g. skylight)

Active solar (solar hot water)


Photovoltaics

Integration of solar energy systems in buildings




Evacuated-tube solar hot water system in a hotel in Lhasa, Tibet
(photo taken by Dr Sam C M Hui)

* Locate array in an unshaded area facing the equator

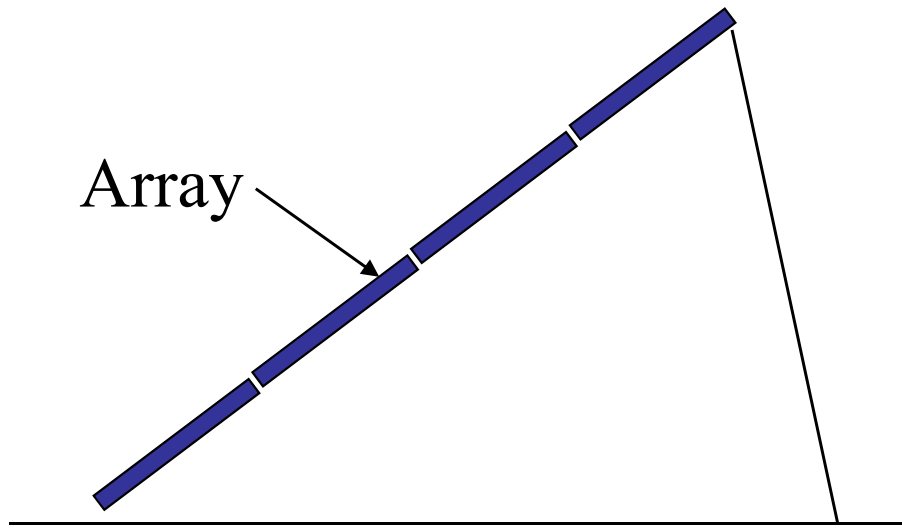

Tilt angle
= latitude ($^{\circ}$) + 15°


(a) Roof (horizontal)

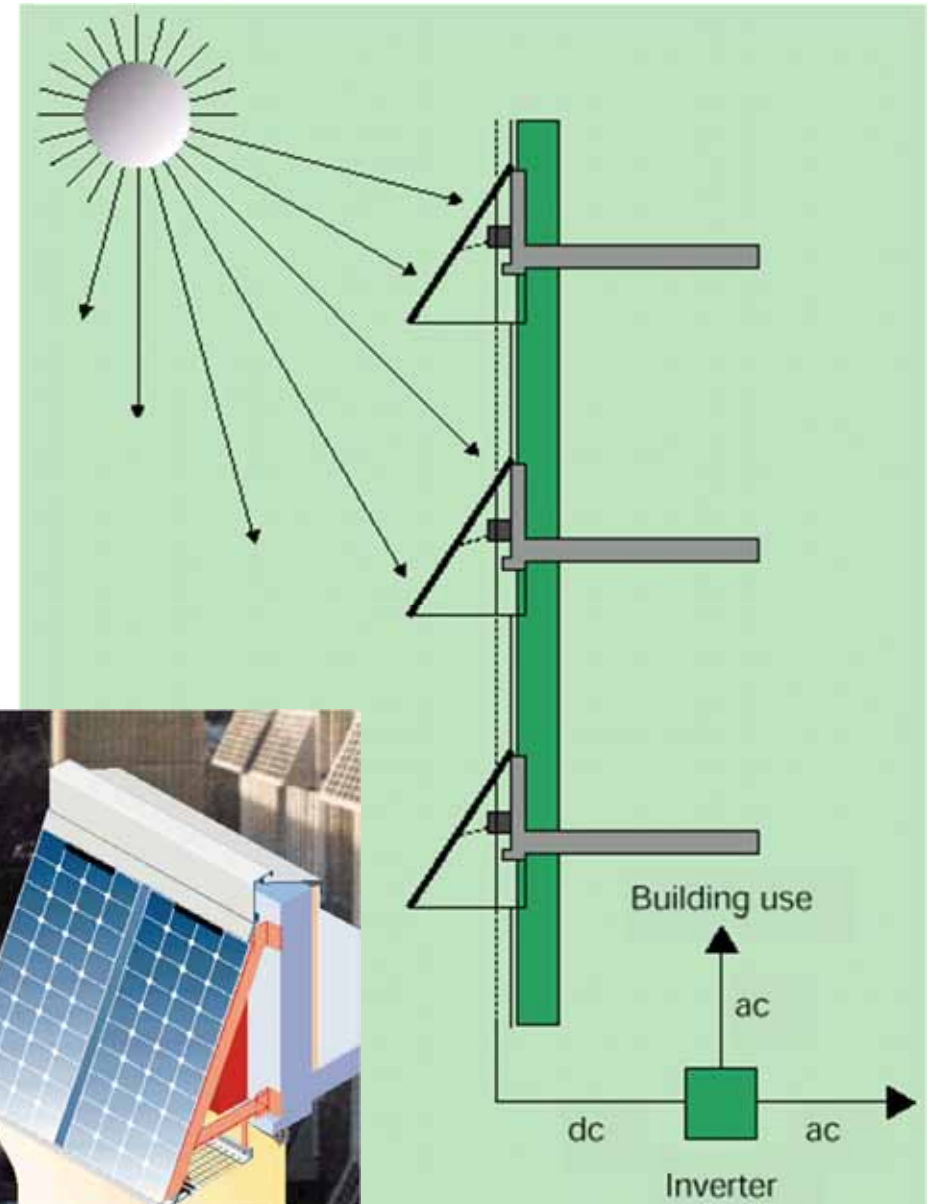

(b) Facades (vertical)

PV installations in buildings

Innovative ideas for building integrated renewable energy

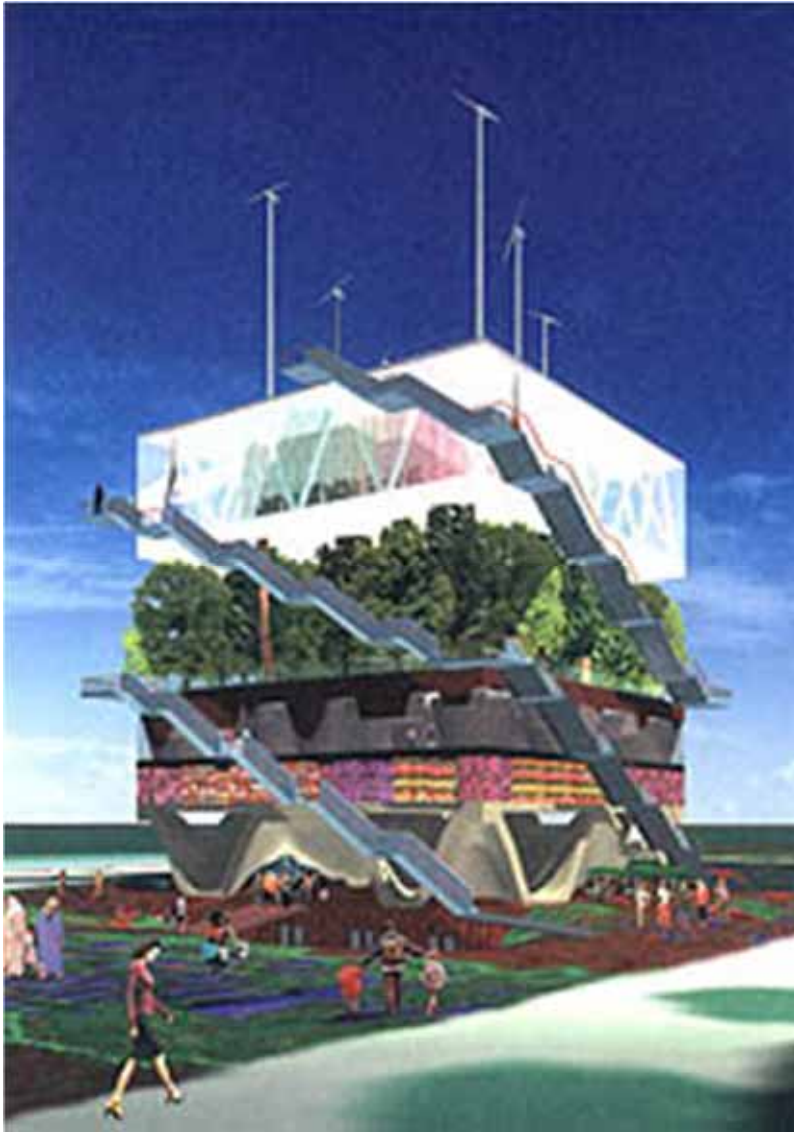


Dutch pavilion,
EXPO 2000 Hannover



Project Zed - London

Building integrated wind turbines (World Trade Center in Bahrain)*

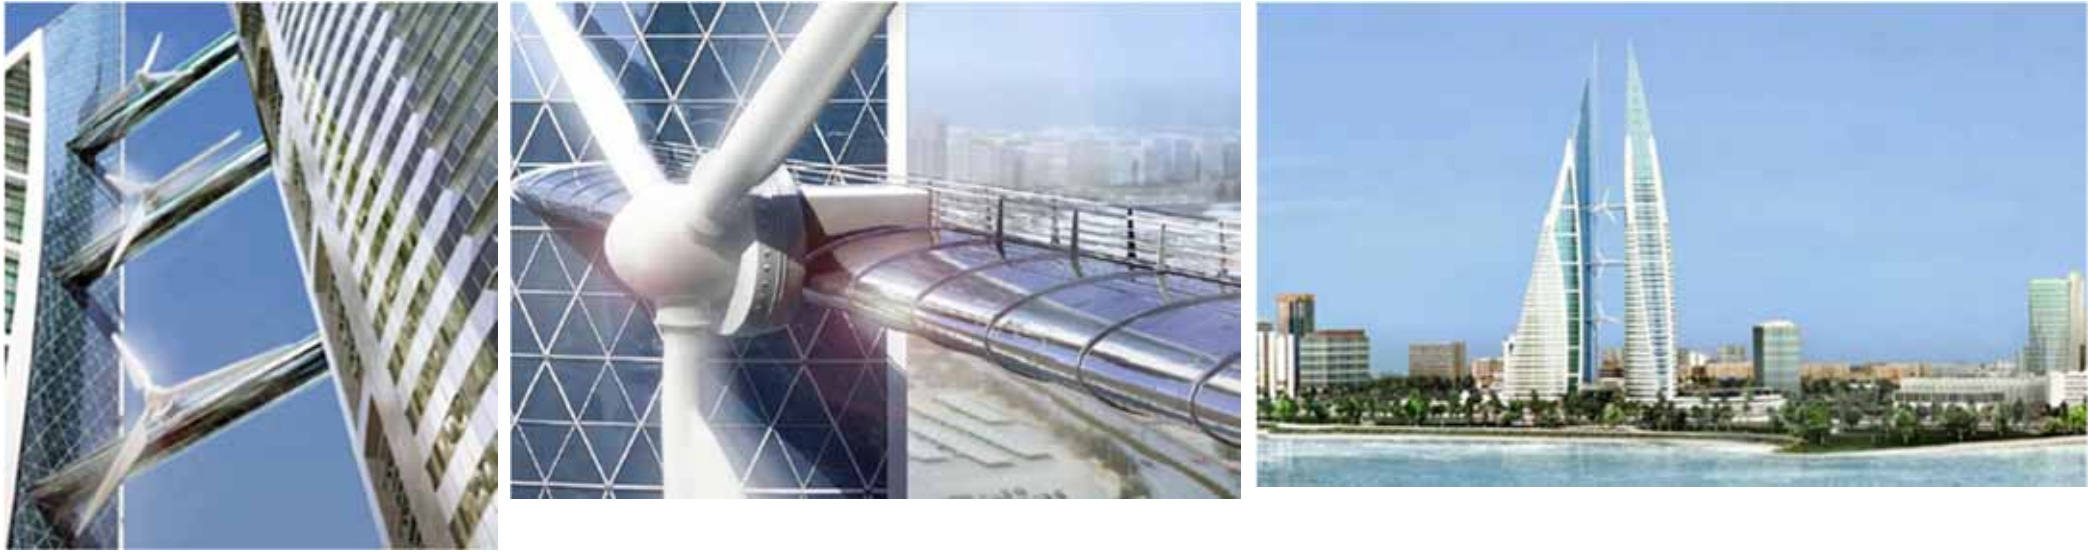

* Green Building - Wind Powered, NatGeo World Trade Center Bahrain 1 (14:00)


<https://www.youtube.com/watch?v=TgBsf3d0u7E>

Pearl River Tower, Guangzhou, China

http://en.wikipedia.org/wiki/Pearl_River_Tower


http://www.som.com/projects/pearl_river_tower_sustainable_design



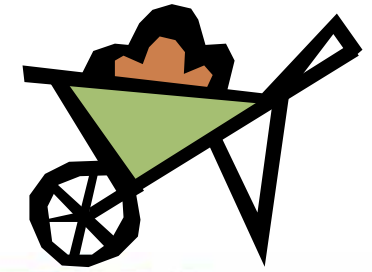

Building materials

- Environmental impact of building materials
 - Through consumption of resources
 - Through production of resources (by-products, wastes, pollution, recyclables)
- Objectives
 - Make informed environmental choices about building materials and systems
 - Careful design & understanding about materials

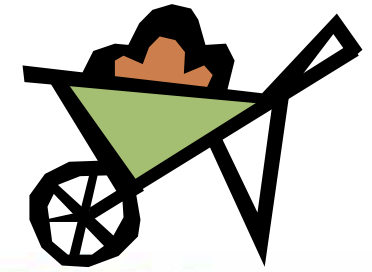


Building materials

- What makes a product **green**?
 - Measured by their environmental impact
 - Life cycle of a sustainable material
 - Using local, durable materials
- Embodied energy*
 - ‘Lifetime’ energy requirement of a material
 - Energy input required to quarry, transport and manufacture the material, plus the energy used in the construction process

[* http://en.wikipedia.org/wiki/Embodied_energy]




Life Cycle of Building Products

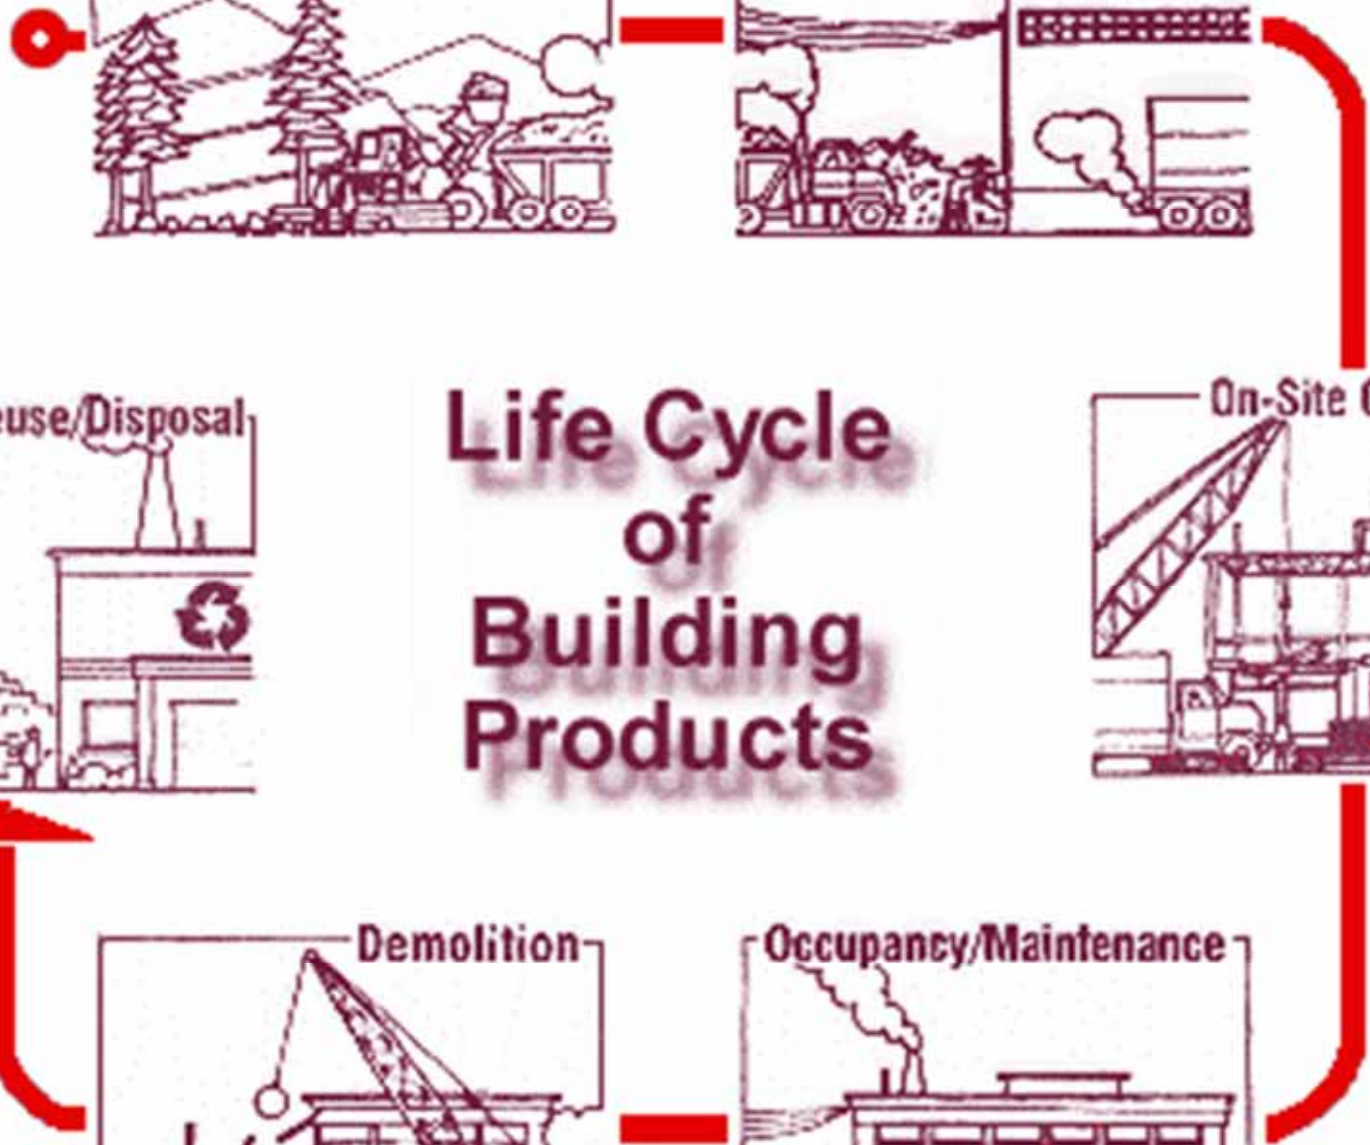

Estimated embodied energy of insulation materials

Material	Embodied energy (MJ/kg)	Mass per insulating unit (kg)	Embodied energy per insulating unit (MJ)
Cellulose	1.8	0.41	0.7
Fiberglass	28	0.17	5
Mineral wool	15	0.34	5
EPS	75	0.18	13
Polysio	70	0.22	15

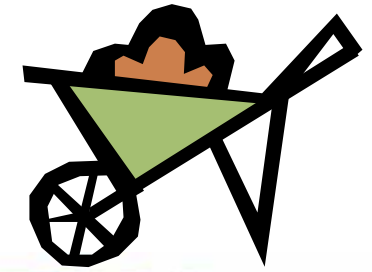

Building materials

- Specify **green materials & products**
 - Made from environmentally attractive materials
 - Such as reclaimed, recycled or recyclable products
 - That reduce environmental impacts during construction, renovation, or demolition
 - That reduce environmental impacts of building operation
 - That contribute to a safe, healthy indoor environment
 - That are green because what isn't there (e.g. CFC)

Green Features

**Manufacturing
Process (MP)**

**Building
Operations (BO)**

**Waste
Mgmt. (WM)**

Waste
Reduction (**WR**)

Pollution
Prevention (**P2**)

Recycled (**RC**)

Embodied Energy
Reduction (**EER**)

Natural
Materials (**NM**)

Energy
Efficiency (**EE**)

Water Treatment &
Conservation (**WTC**)

Nontoxic (**NT**)

Renewable Energy
Source (**RES**)

Longer Life
(**LL**)


Biodegradable
(**B**)

Recyclable
(**R**)

Reusable (**RU**)


Others (**O**)

Building materials

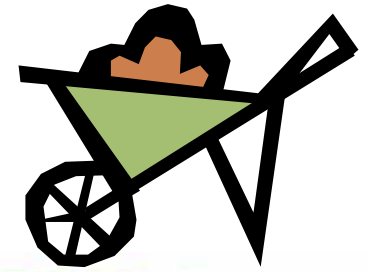

- Material conservation
 - Adapt existing buildings to new uses
 - Material conserving design & construction
 - Size buildings & systems properly
 - Incorporate reclaimed or recycled materials
 - Use environment-friendly materials & products
 - Design for deconstruction (“close the loop”)
- Life cycle assessment (LCA) is often used to evaluate the environmental impact of building materials and products



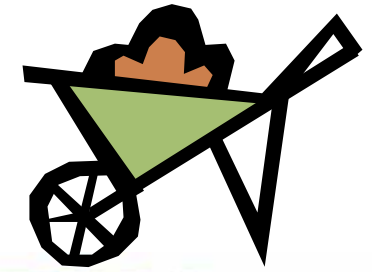

Building materials

- Waste management strategies

- Waste prevention & reduction
- Construction and demolition recycling
- Architectural reuse
- Design for material recovery

- Important factors

- On-site collection & storage space
 - In HK, the space is very limited
- Sorting & separation (paper, glass, plastic, metal)




Water issues



- Stormwater or watershed protection
 - Control rainwater runoff, flooding and erosion
 - Preservation of soils and drainage ways
 - Porous paving materials
 - Drainage of concentrated runoff
 - Avoid pollution and soil disturbance
- Water efficiency and conservation
 - Saving of water and money: water-use charge, sewage treatment costs, energy use, chemical use




Integrated environmentally sustainable plumbing systems

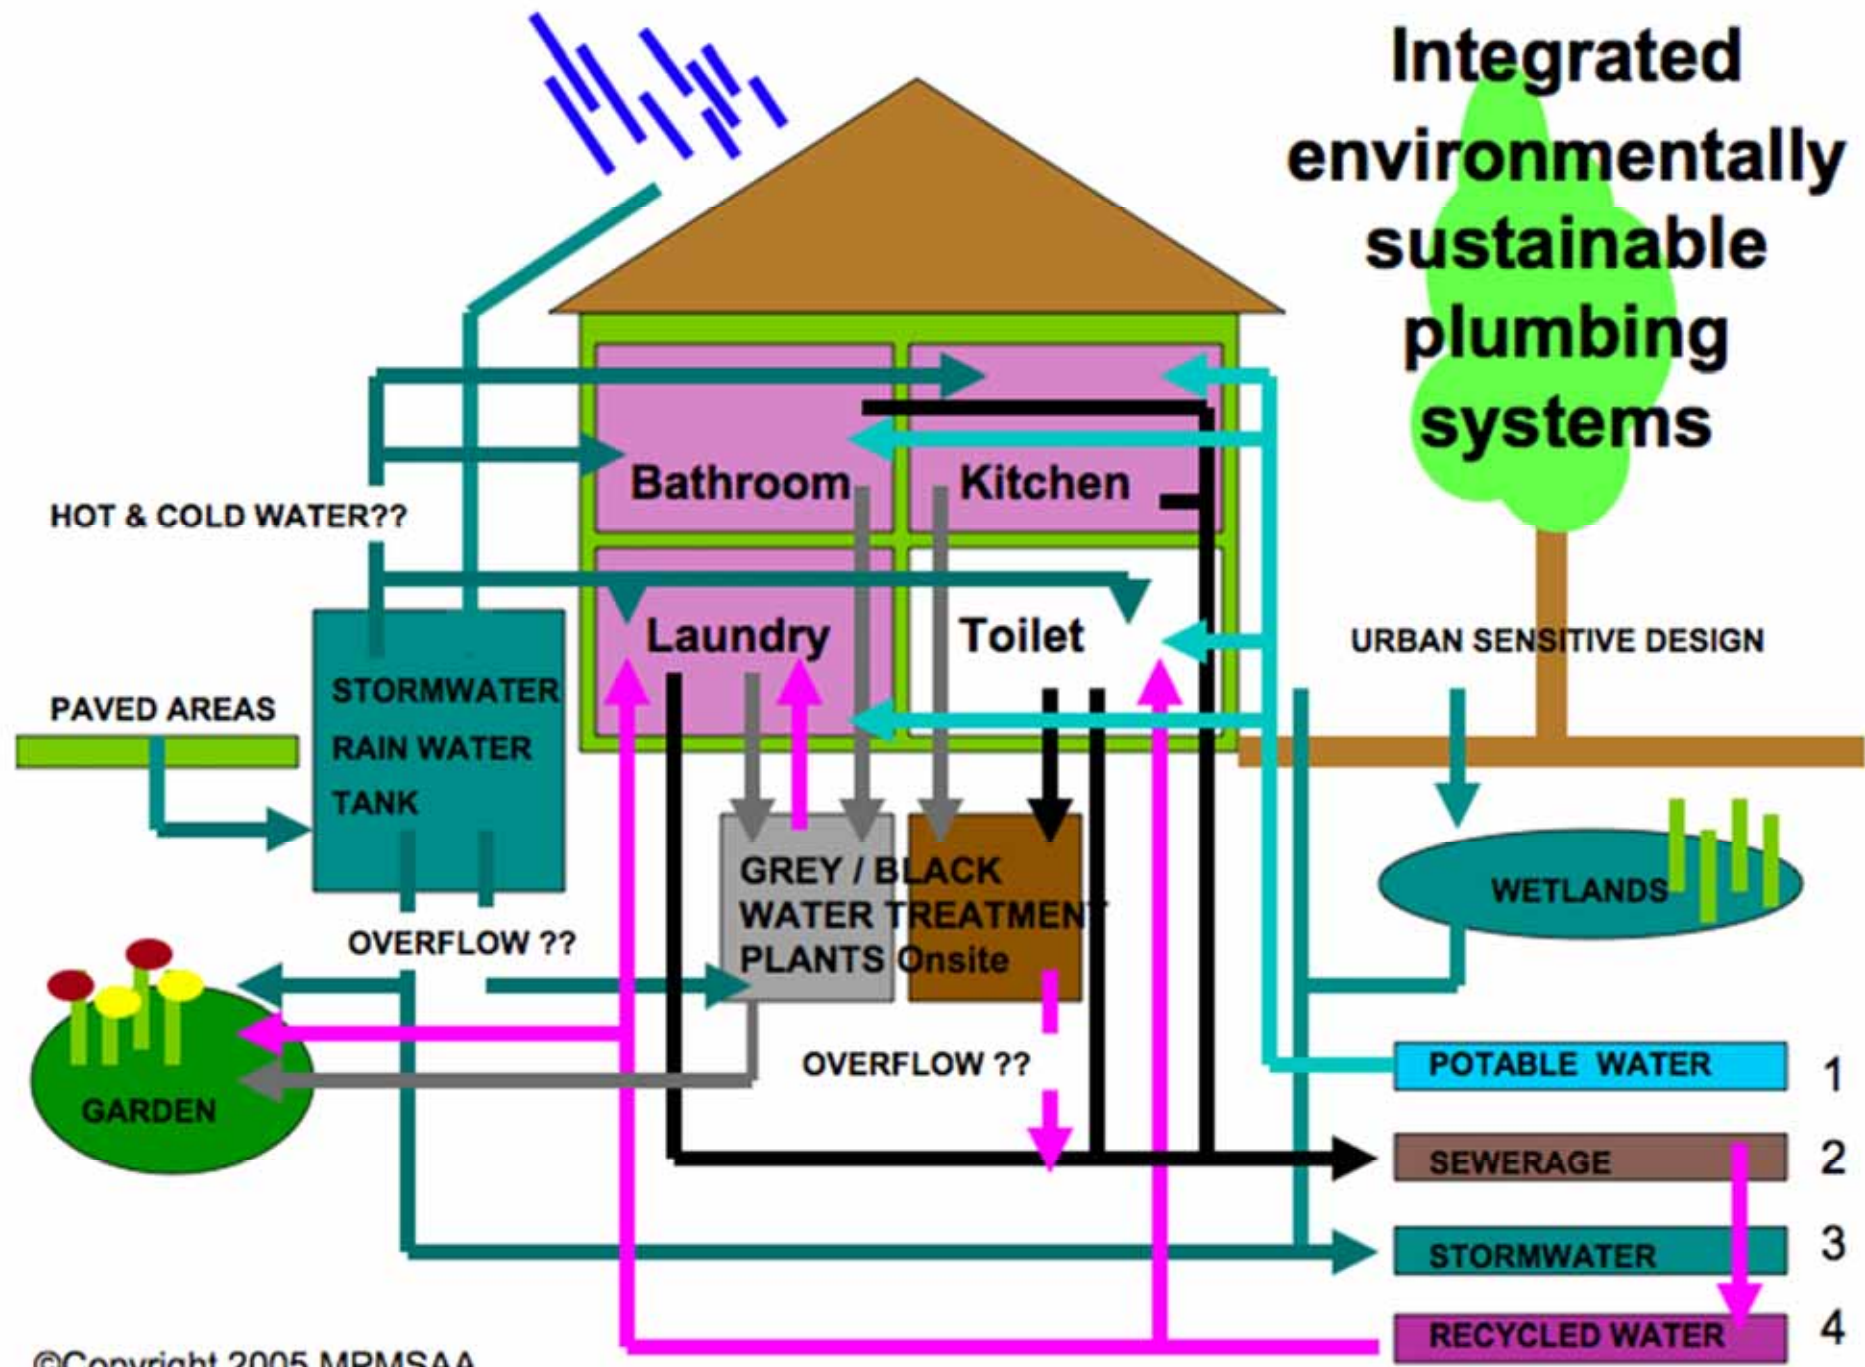


Water issues




- Design strategy for water efficiency
 - Reduce water consumption
 - Low-flush toilets & showerheads
 - Leak detection & prevention
 - Correct use of appliances (e.g. washing machine)
 - Reuse and recycle water onsite
 - Rainwater collection & recycling
 - Greywater recycling (e.g. for irrigation)
 - No-/Low-water composting toilet

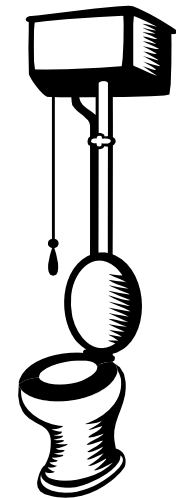


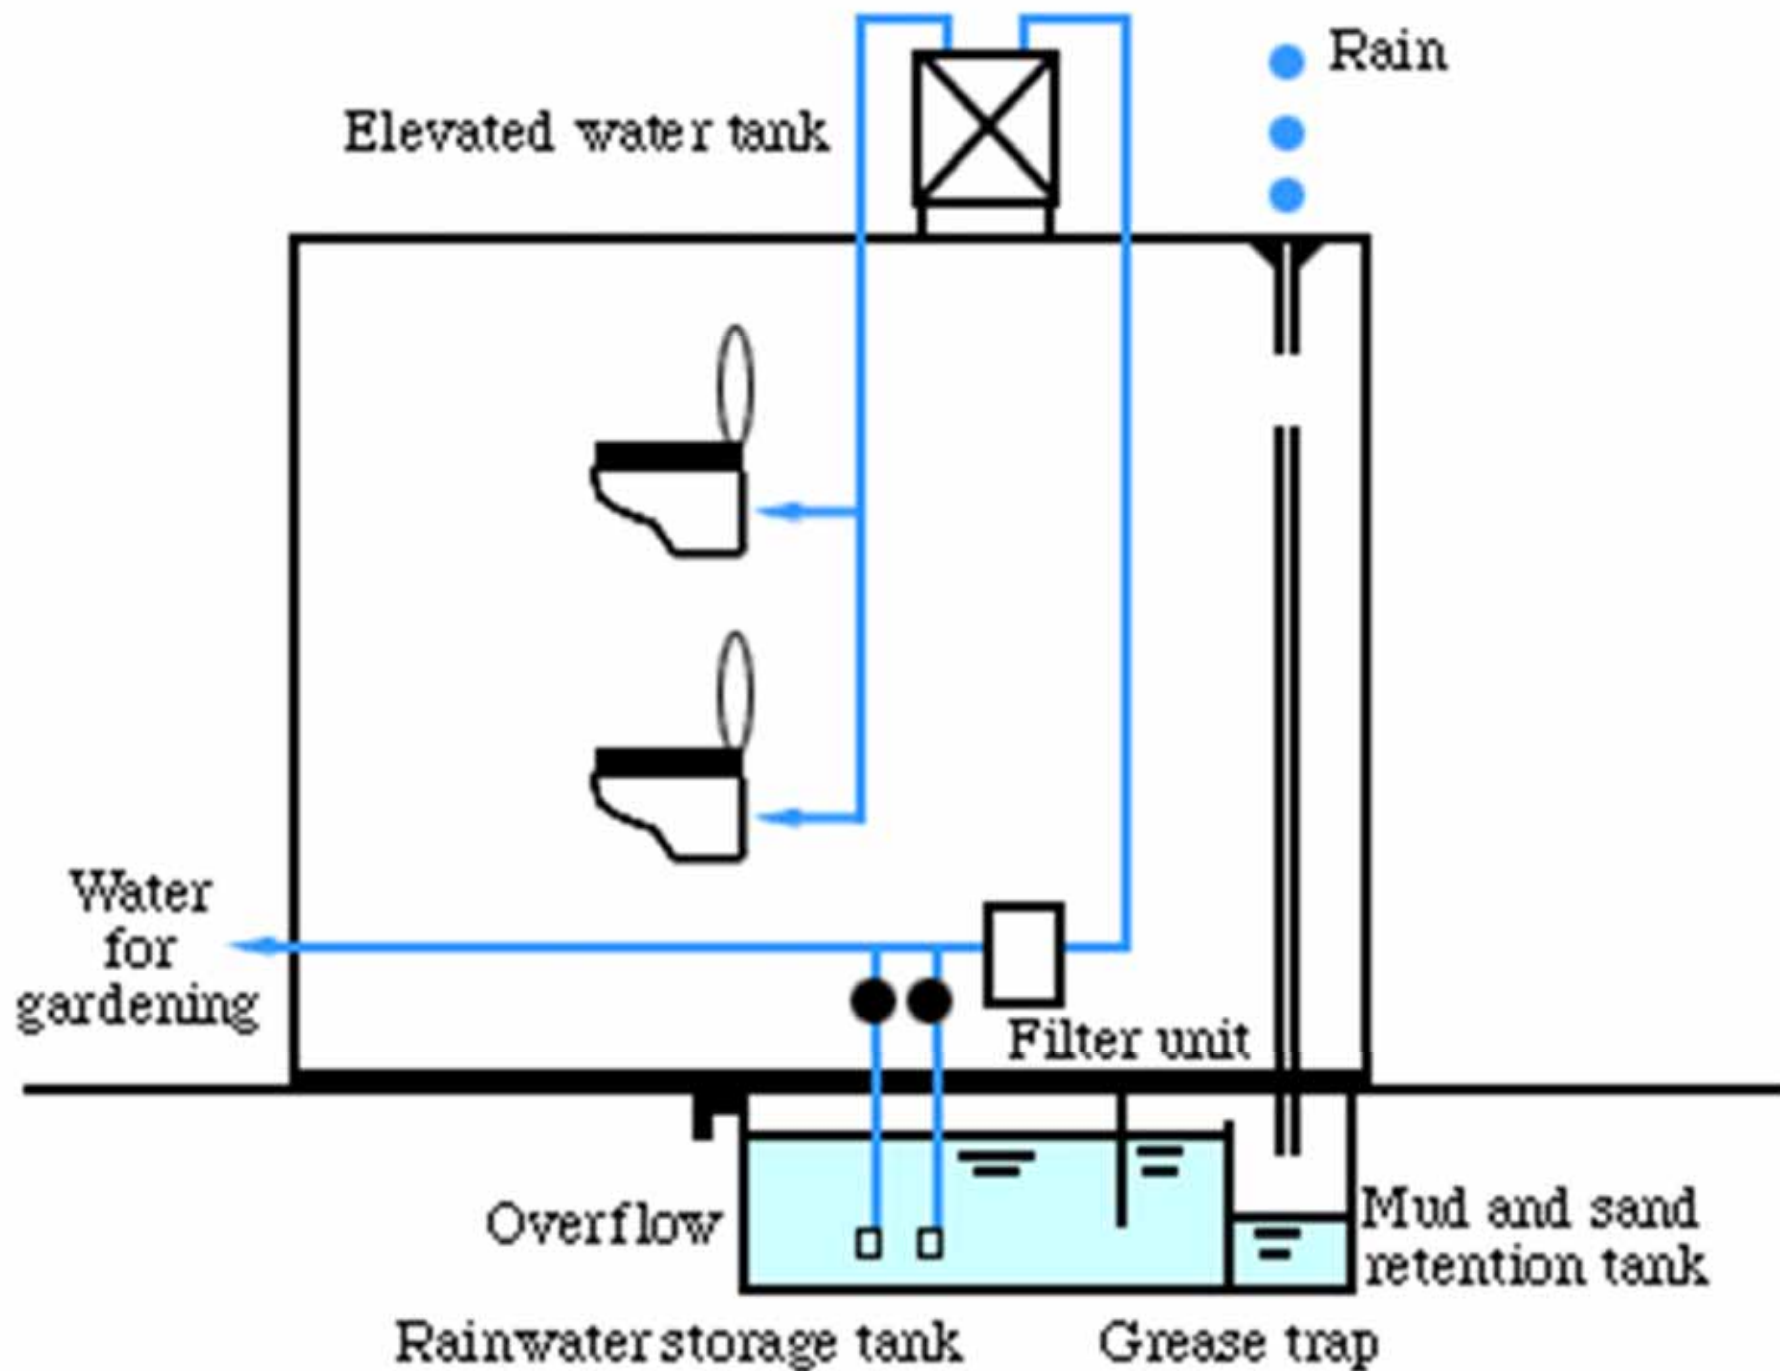

Rainwater recycling system


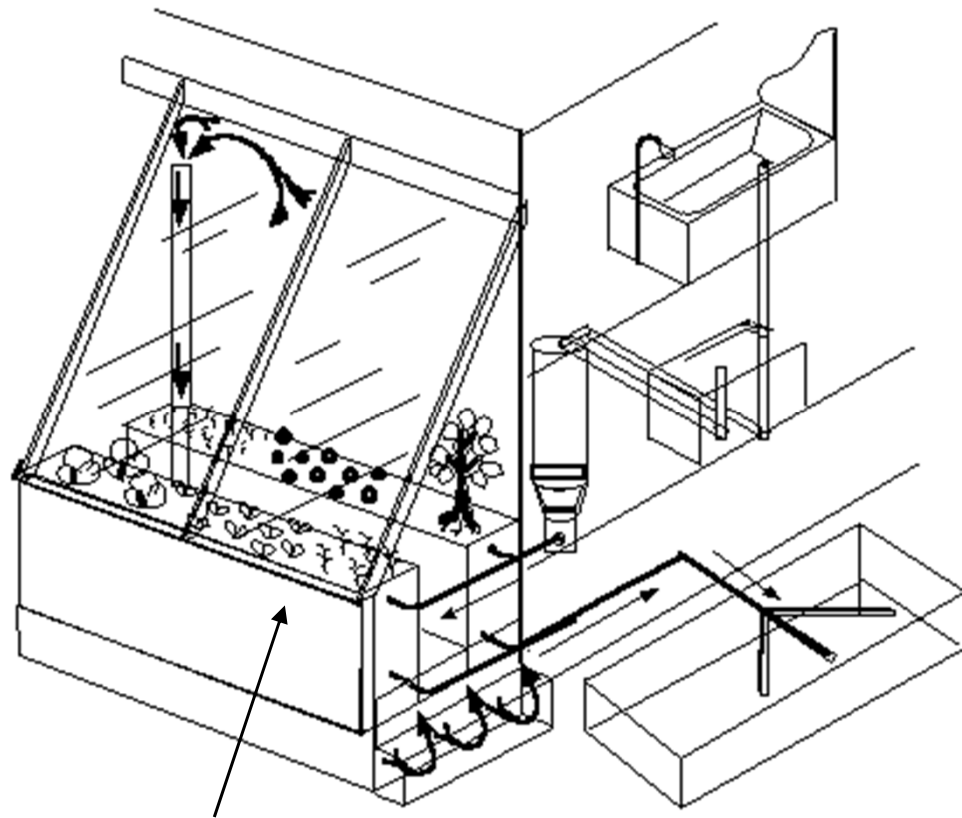


Crops growing
(for food or flowers)

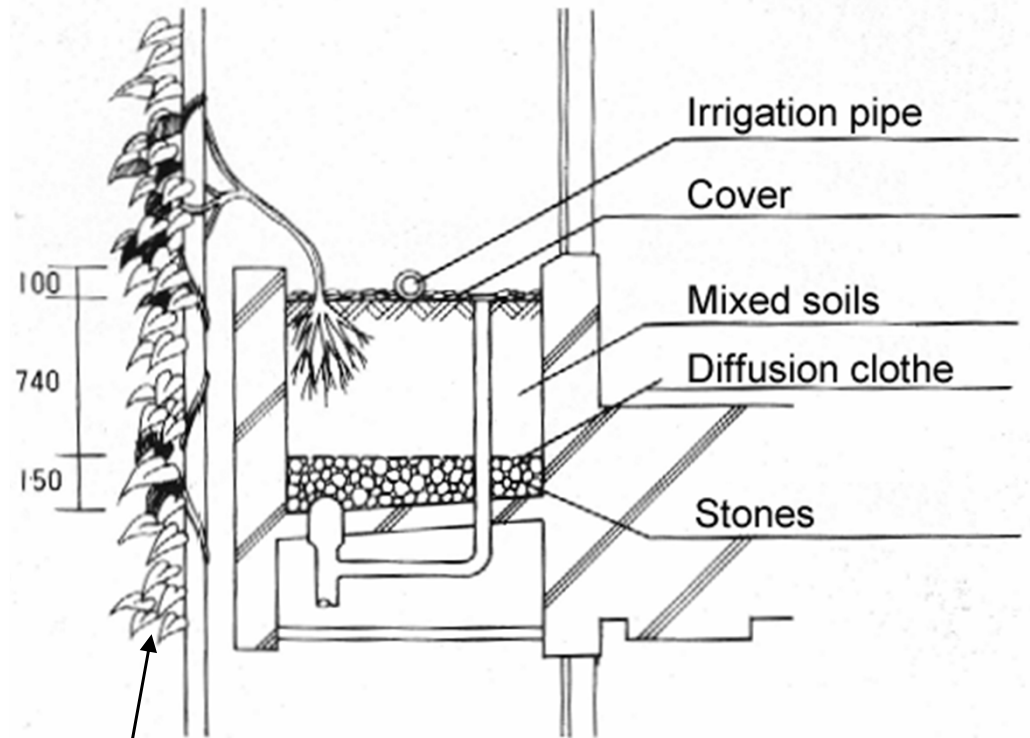

Espalier


Using greywater for crops and landscape irrigation

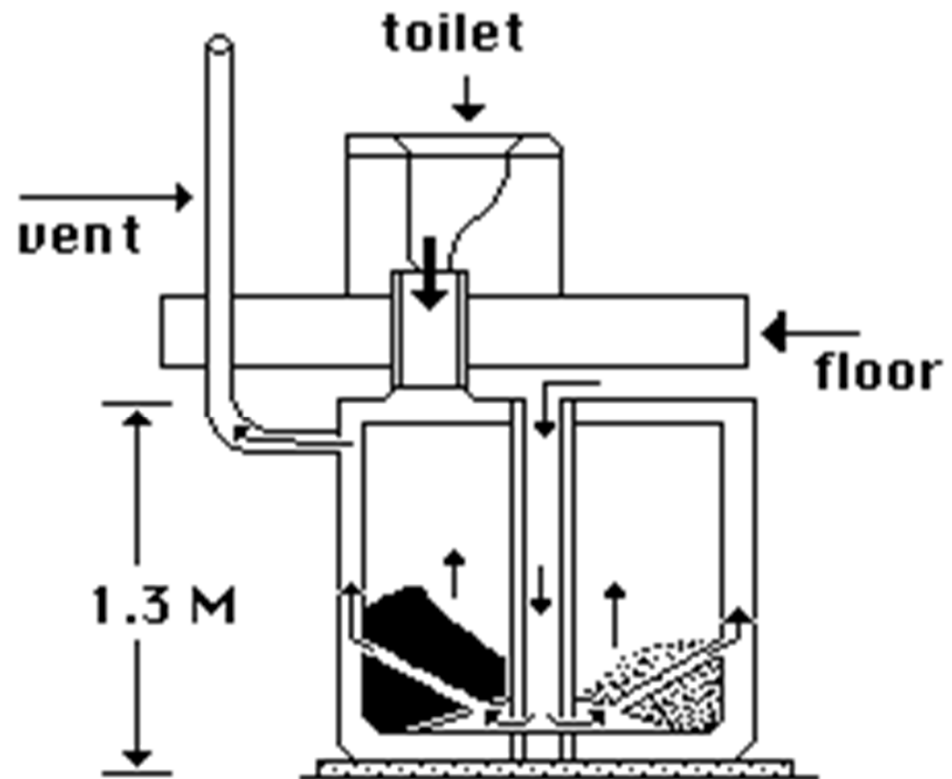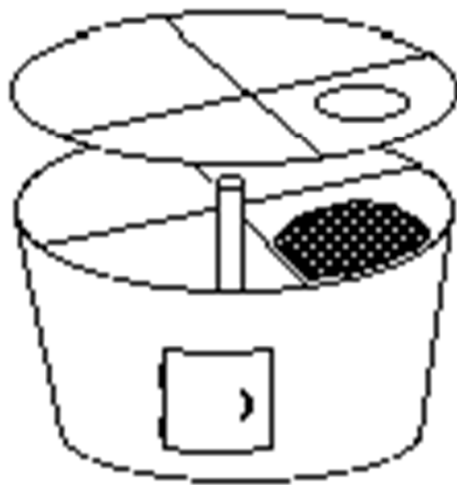

Composting toilets


Water Reclamation Process

- ➔ Rainwater Collection System
- ➔ Grey-water Collection System
- ➔ Sewerage System
- ➔ Reclaimed Water Distribution System
- ➔ Treated Effluent

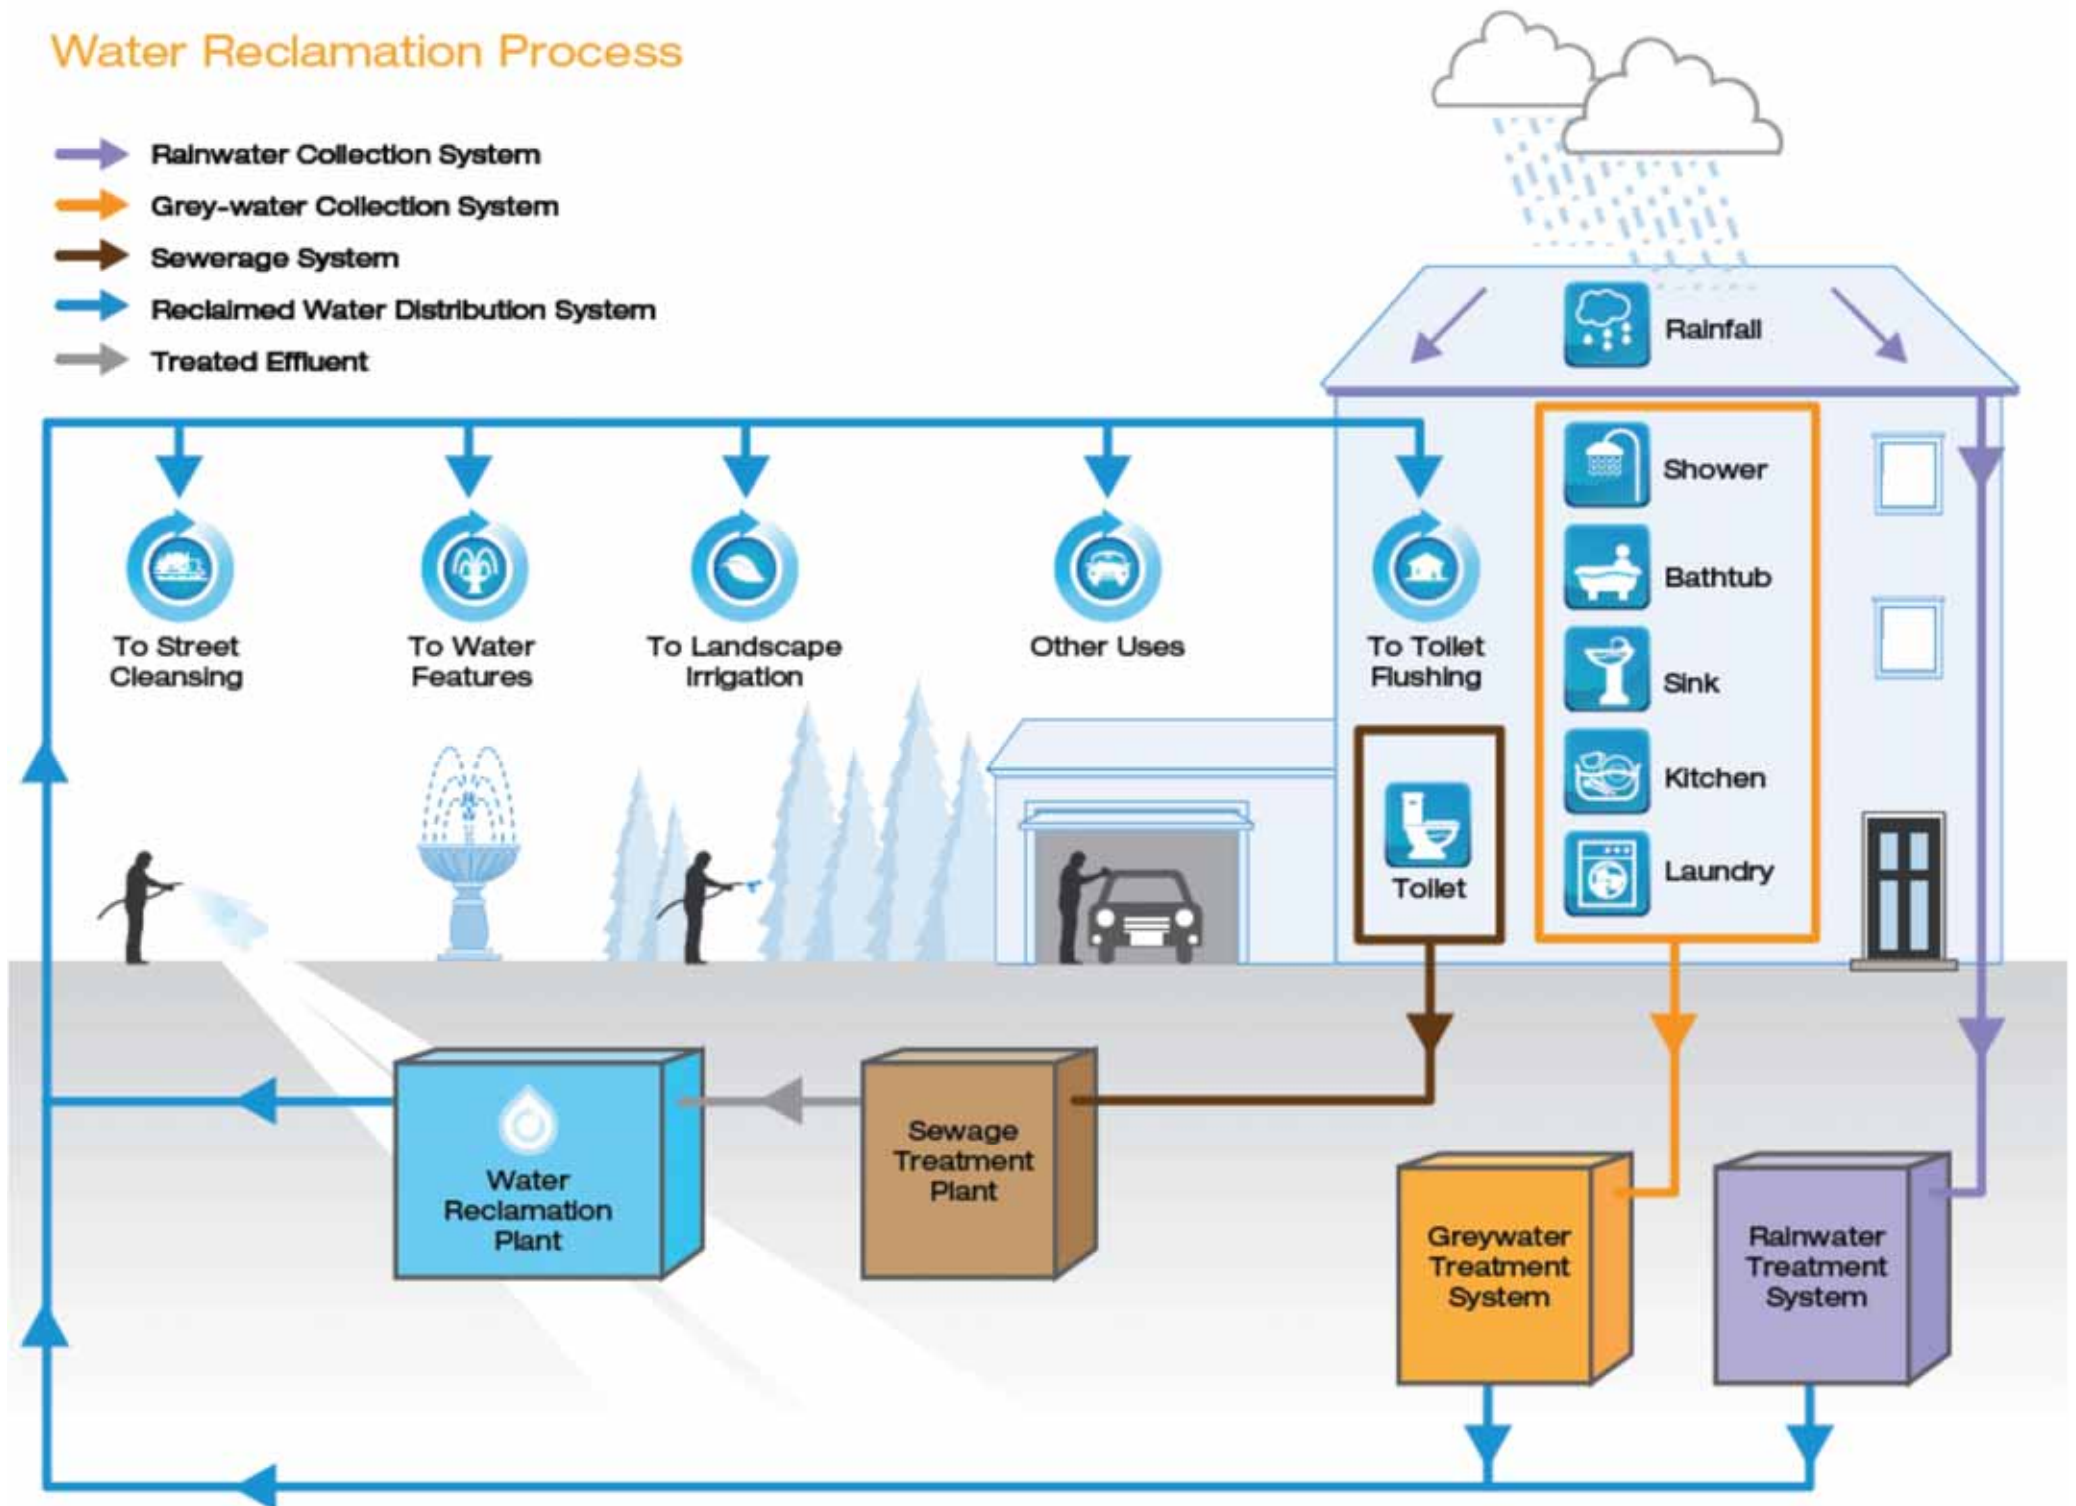


(Source: Water Supplies Department, www.wsd.gov.hk)

Indoor environment



- Indoor environmental quality (IEQ)
 - Indoor air quality
 - Ensure health & well-being
 - Visual quality
 - Provide daylight & comfortable conditions
 - Acoustic quality
 - Noise control
 - Controllability
 - Allow occupant control over thermal & visual

Indoor environment




- Indoor air quality (IAQ)
 - People spend most of their time indoors
 - Pollutants may build up in an enclosed space
 - Effects on health and productivity
- Control methods
 - Assess materials to avoid health hazards
 - Such as volatile organic compounds (VOC)
 - Ensure good ventilation & building management




Understanding Indoor Air Quality Problems


(Brooks & Davis, 1992)

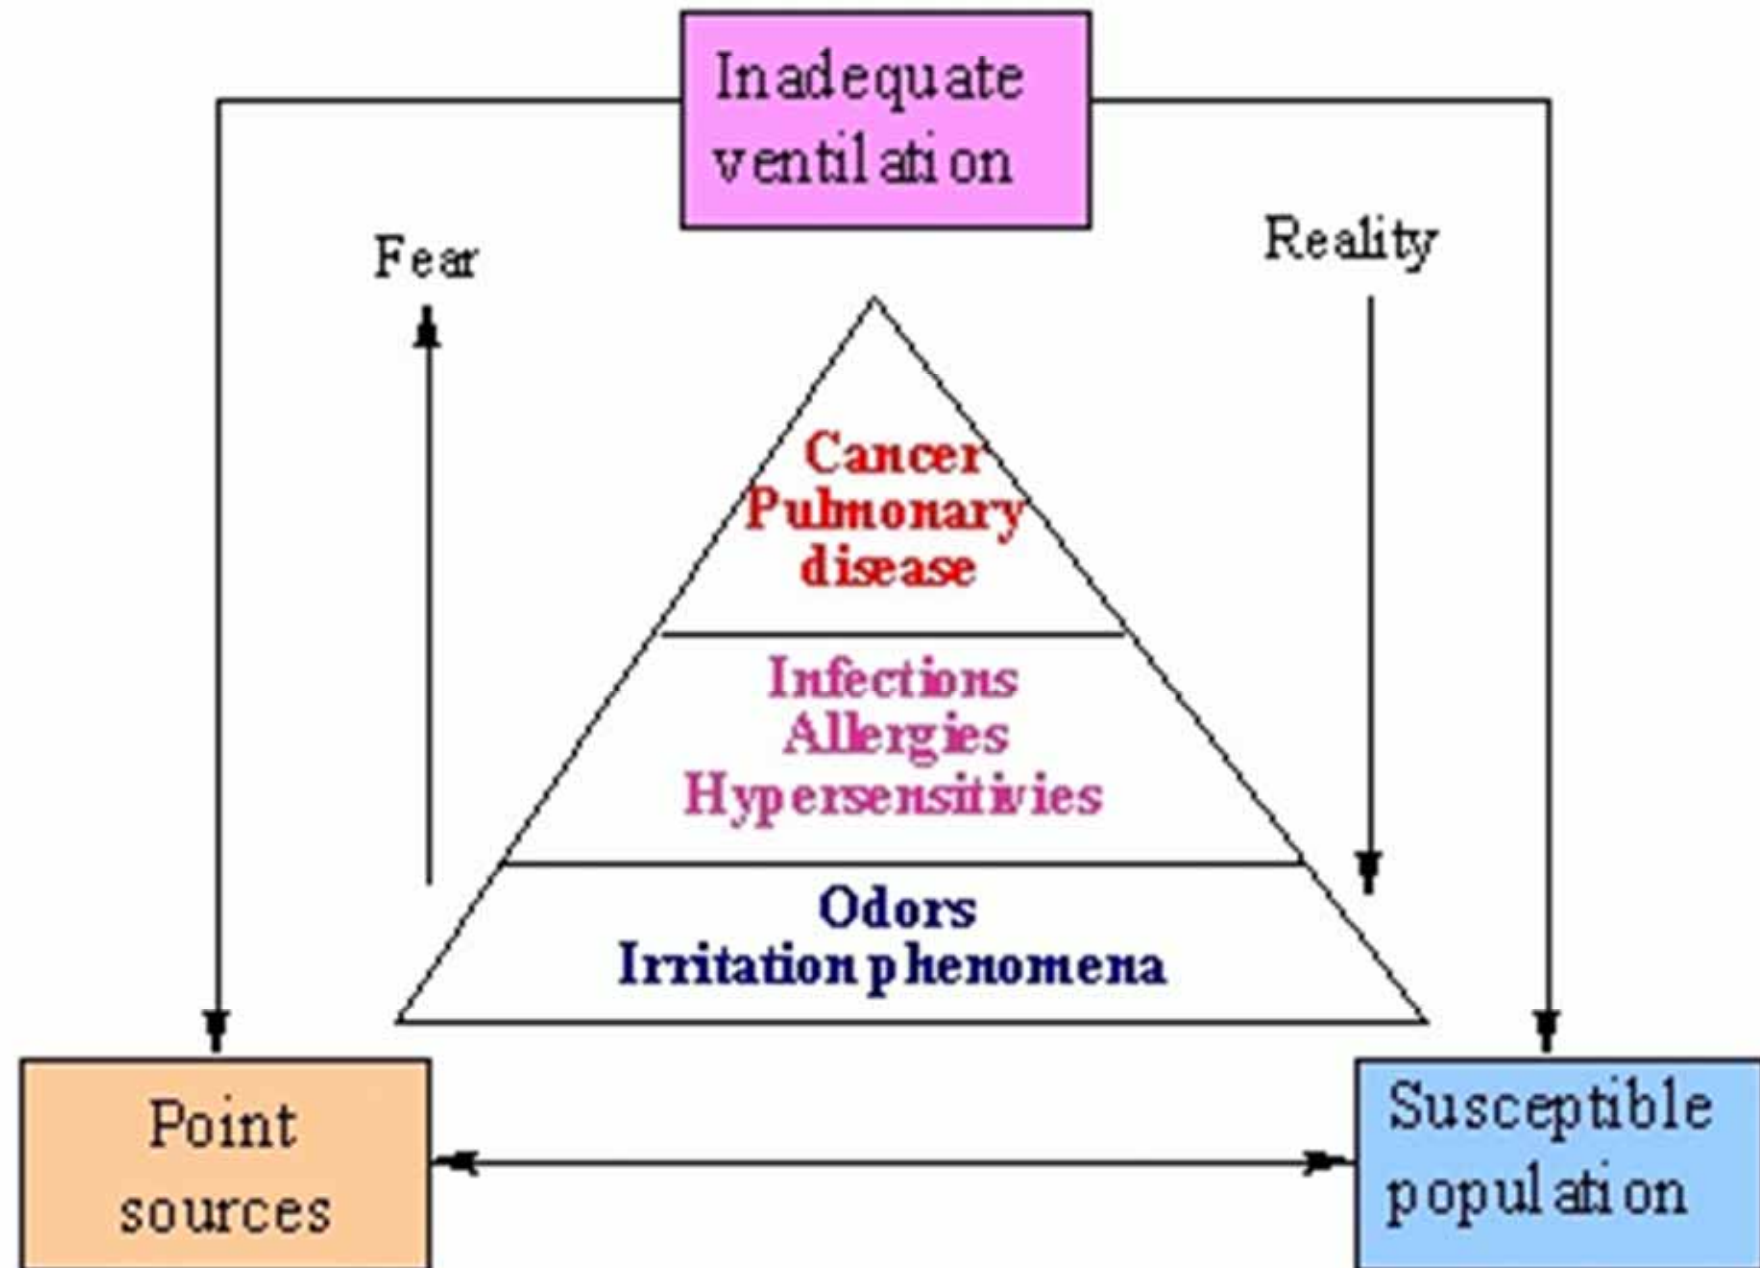

Indoor environment




- IAQ problems
 - Not simple, and is constantly changing interaction of complex factors including:
 - Source of pollutants or odours
 - Maintenance and operation of ventilating systems
 - Moisture and humidity
 - Occupant perceptions and susceptibilities (e.g. elderly)
 - Other psychological factors
 - May cause dissatisfaction and complaints, but cannot determine the reasons [Sick Building]

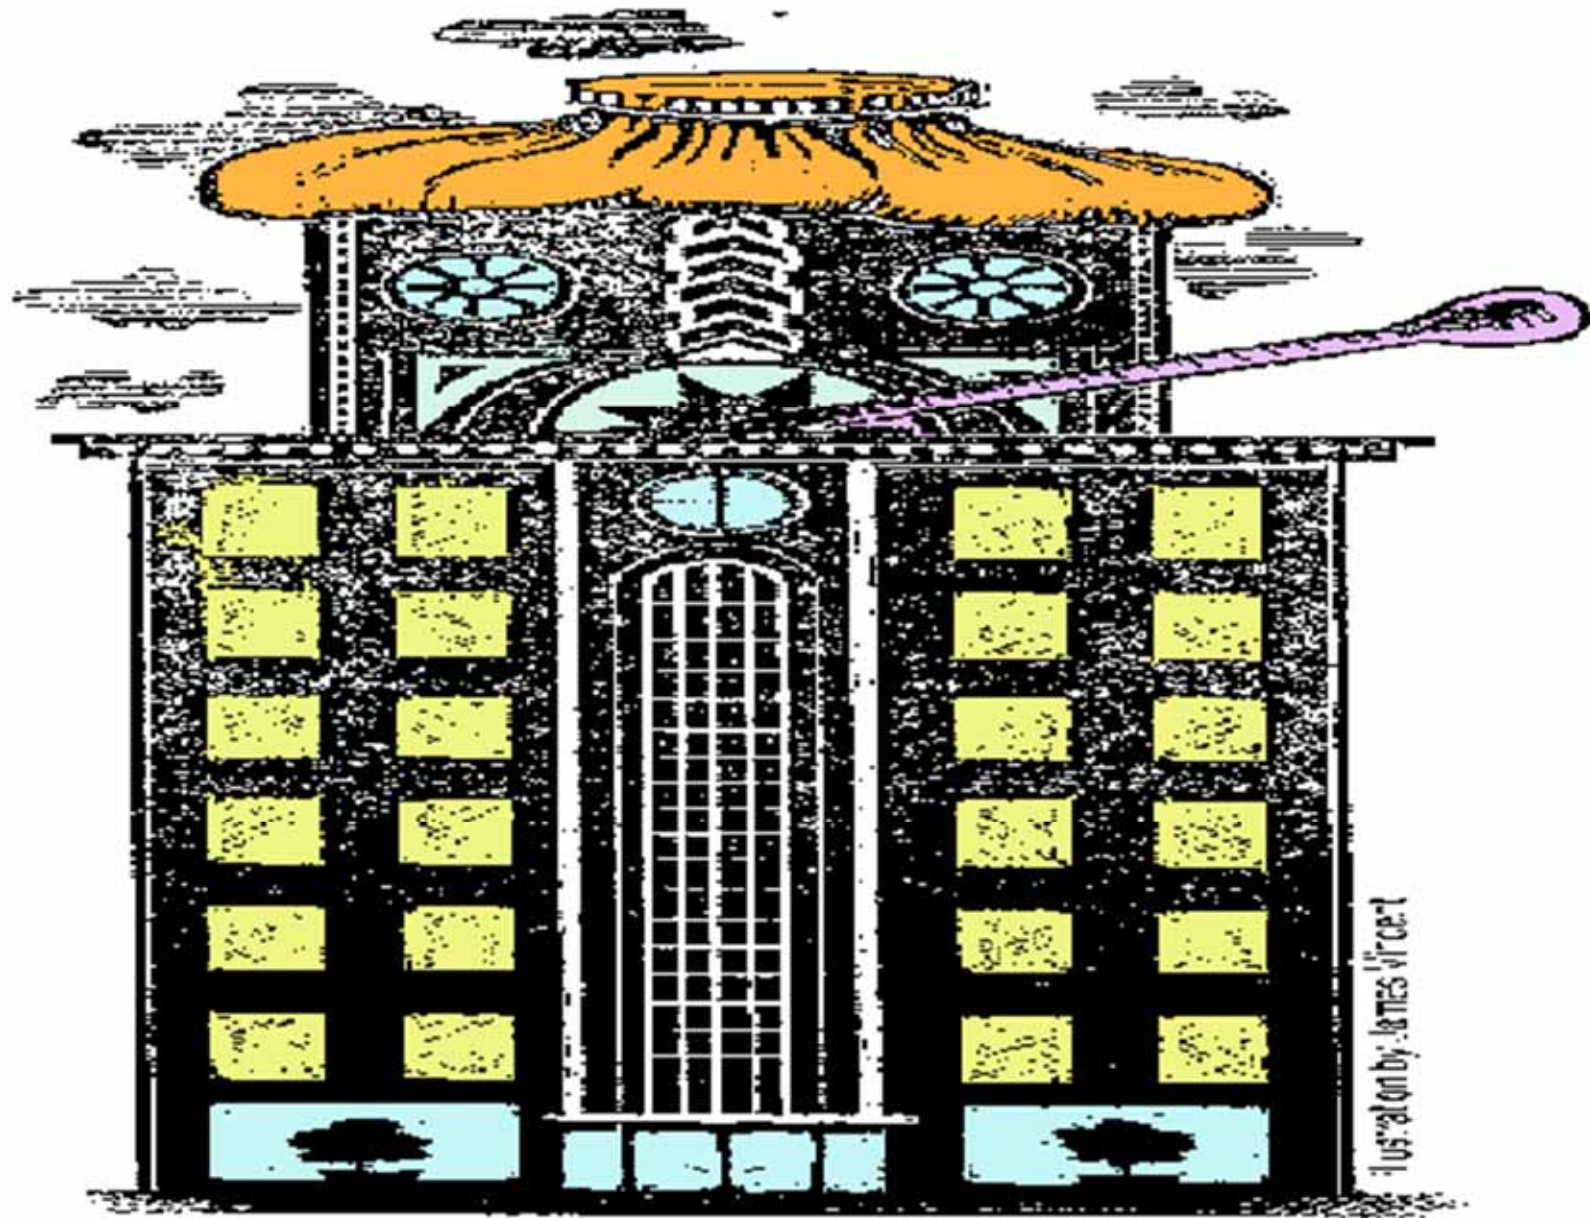

Avoid “sick building syndromes” by maintaining good indoor air quality

Major factors contributing to indoor air quality (IAQ)

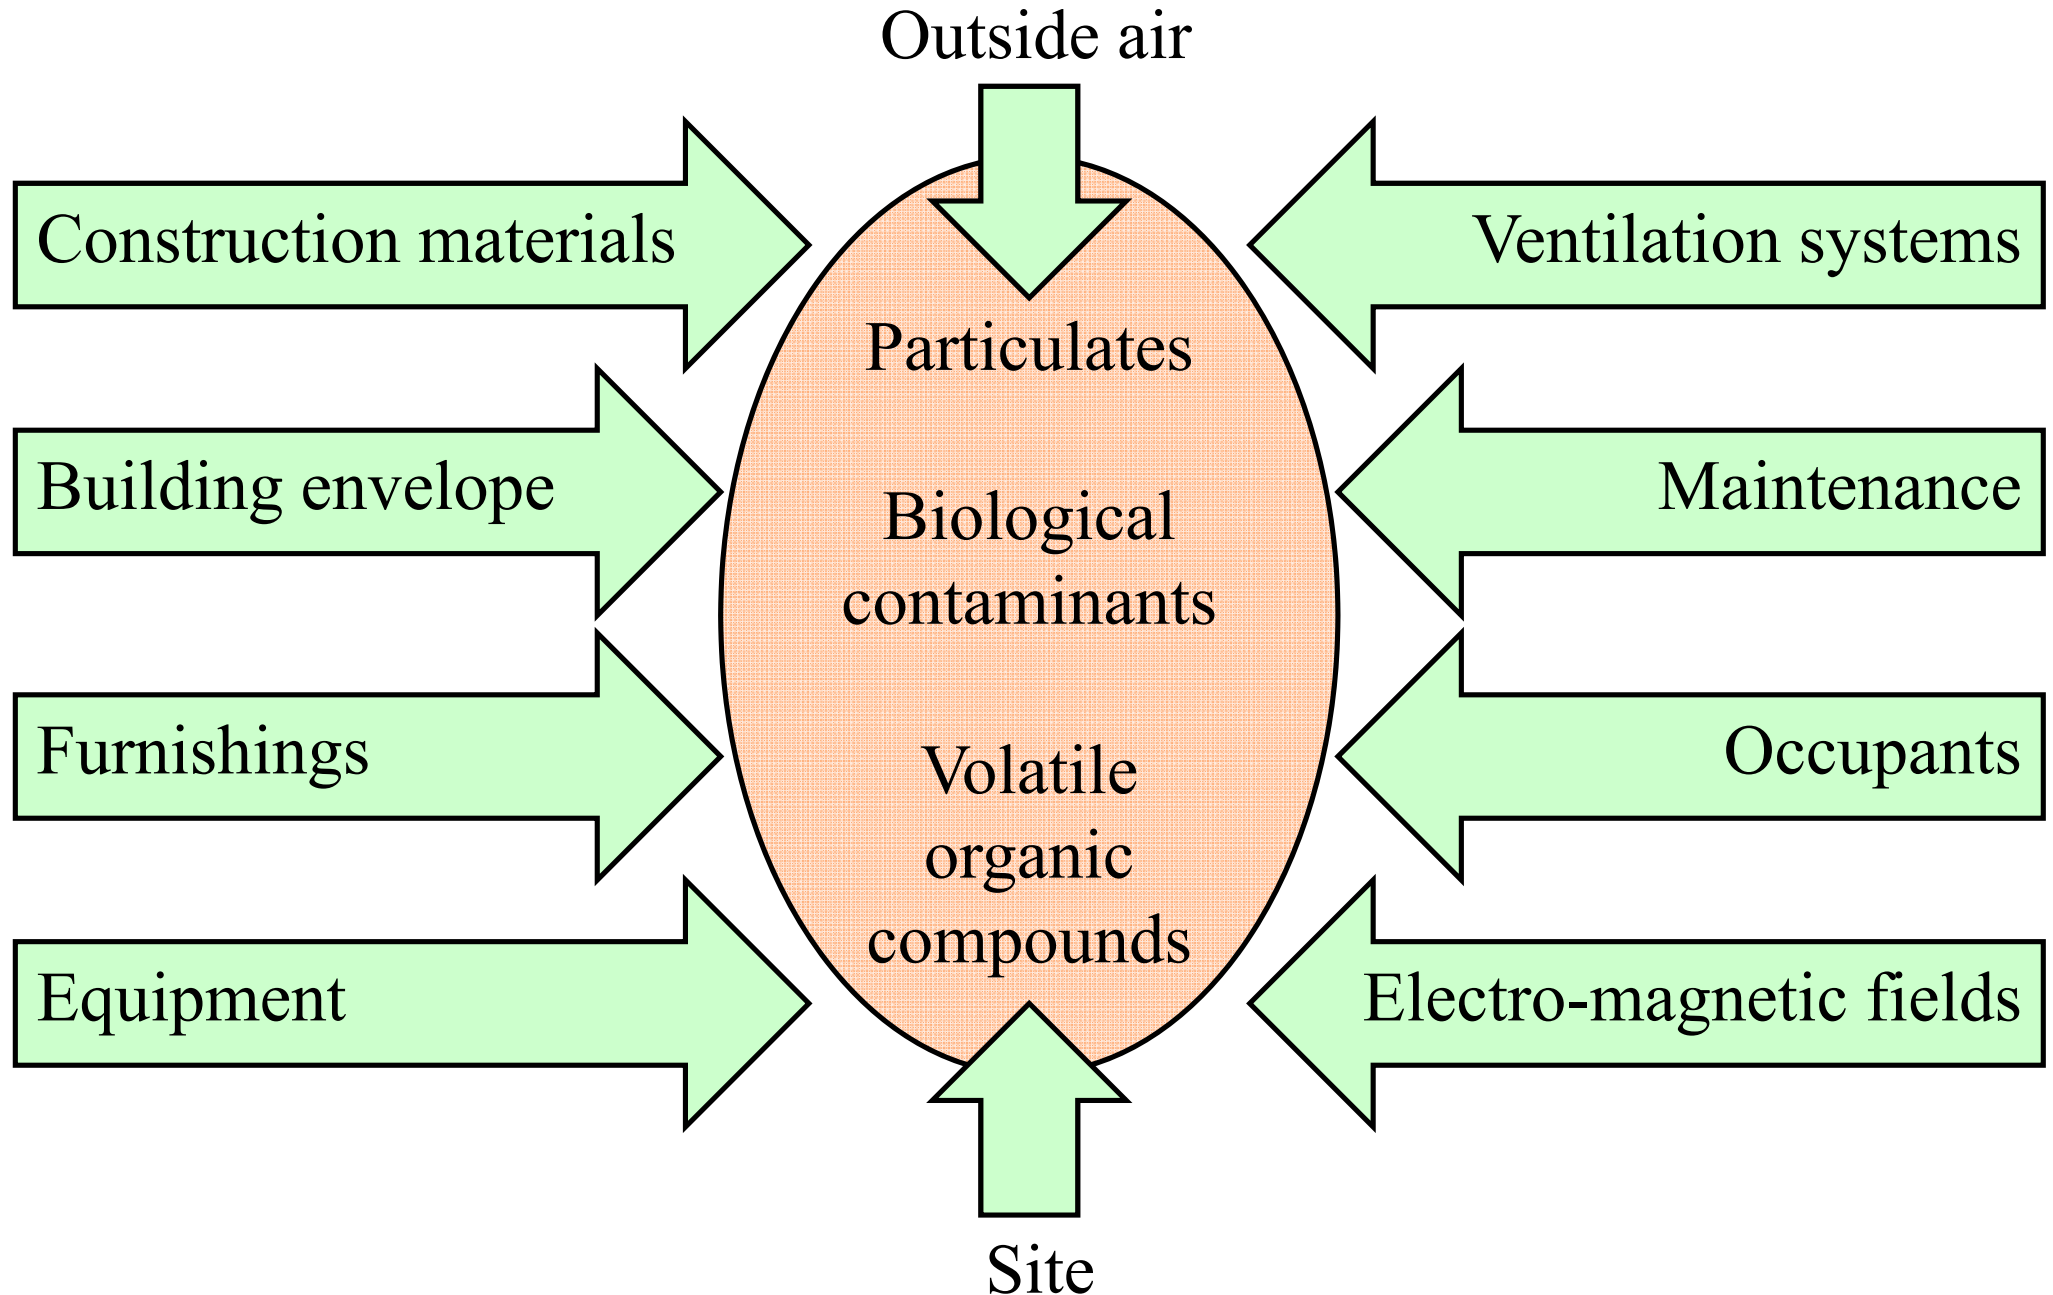

Four principles of indoor air quality design

1. Source Control

+

2. Ventilation Control

+

3. Occupant Activity Control


+

4. Building Maintenance

=


*Total
Indoor
Air
Quality*

Indoor environment



- Source control
 - Site
 - Construction materials
 - Equipment
 - Building contents
 - Human activity
 - Light & noise
 - Furnishings
 - HVAC Systems




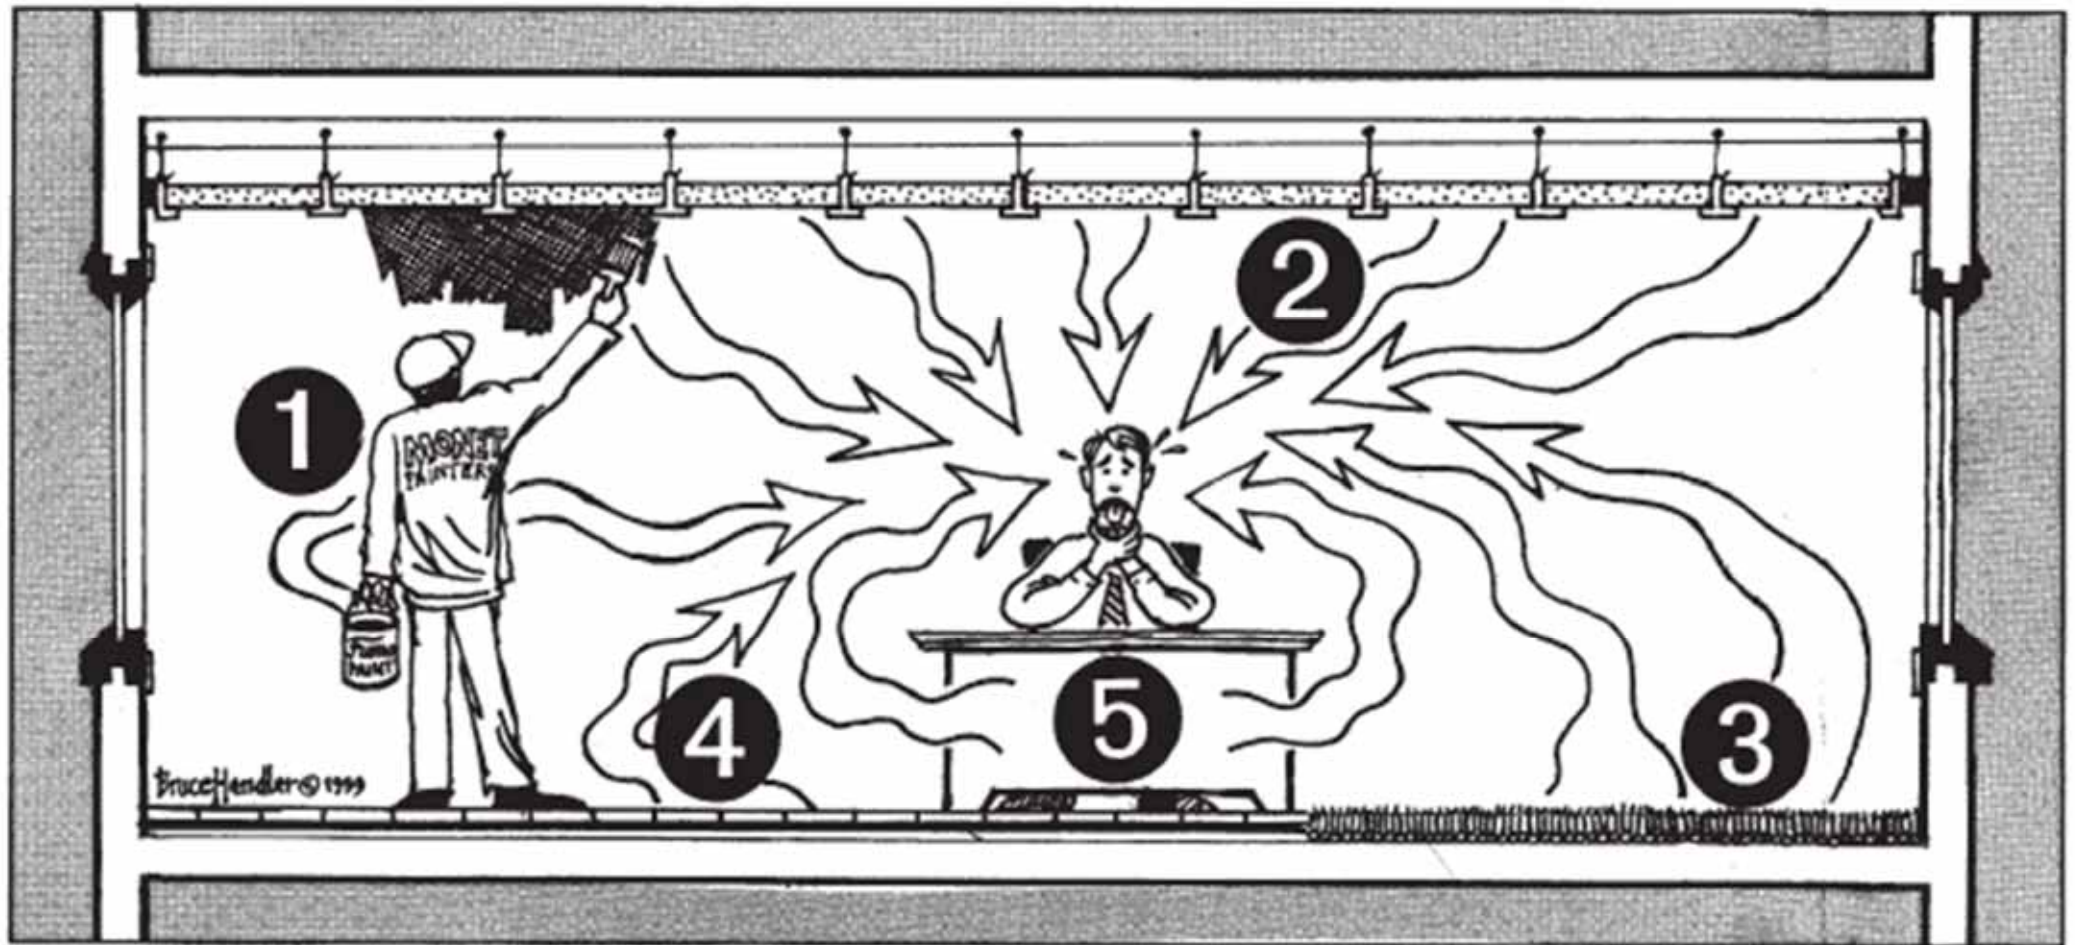

Sources of offgassing in building materials:


- 1) paints,
- 2) ceiling tiles,
- 3) carpeting,
- 4) VCT floor tiles
- 5) manufactured wood products

Indoor environment




- Ventilation control
 - Air intake location
 - Air exhaust location
 - Air filtration
 - Fibrous insulation
 - Ventilation rates
 - Temperature, humidity
 - Control systems, exhaust systems
 - Building commissioning






Integrated building design

- WBDG - The Whole Building Design Guide
 - www.wbdg.org
- Two components of whole building design:
 - Integrated design approach
 - Integrated team process
- A holistic design philosophy
 - Holism + Interconnectedness + Synergy
 - *“The whole is greater than the sum of its parts”*

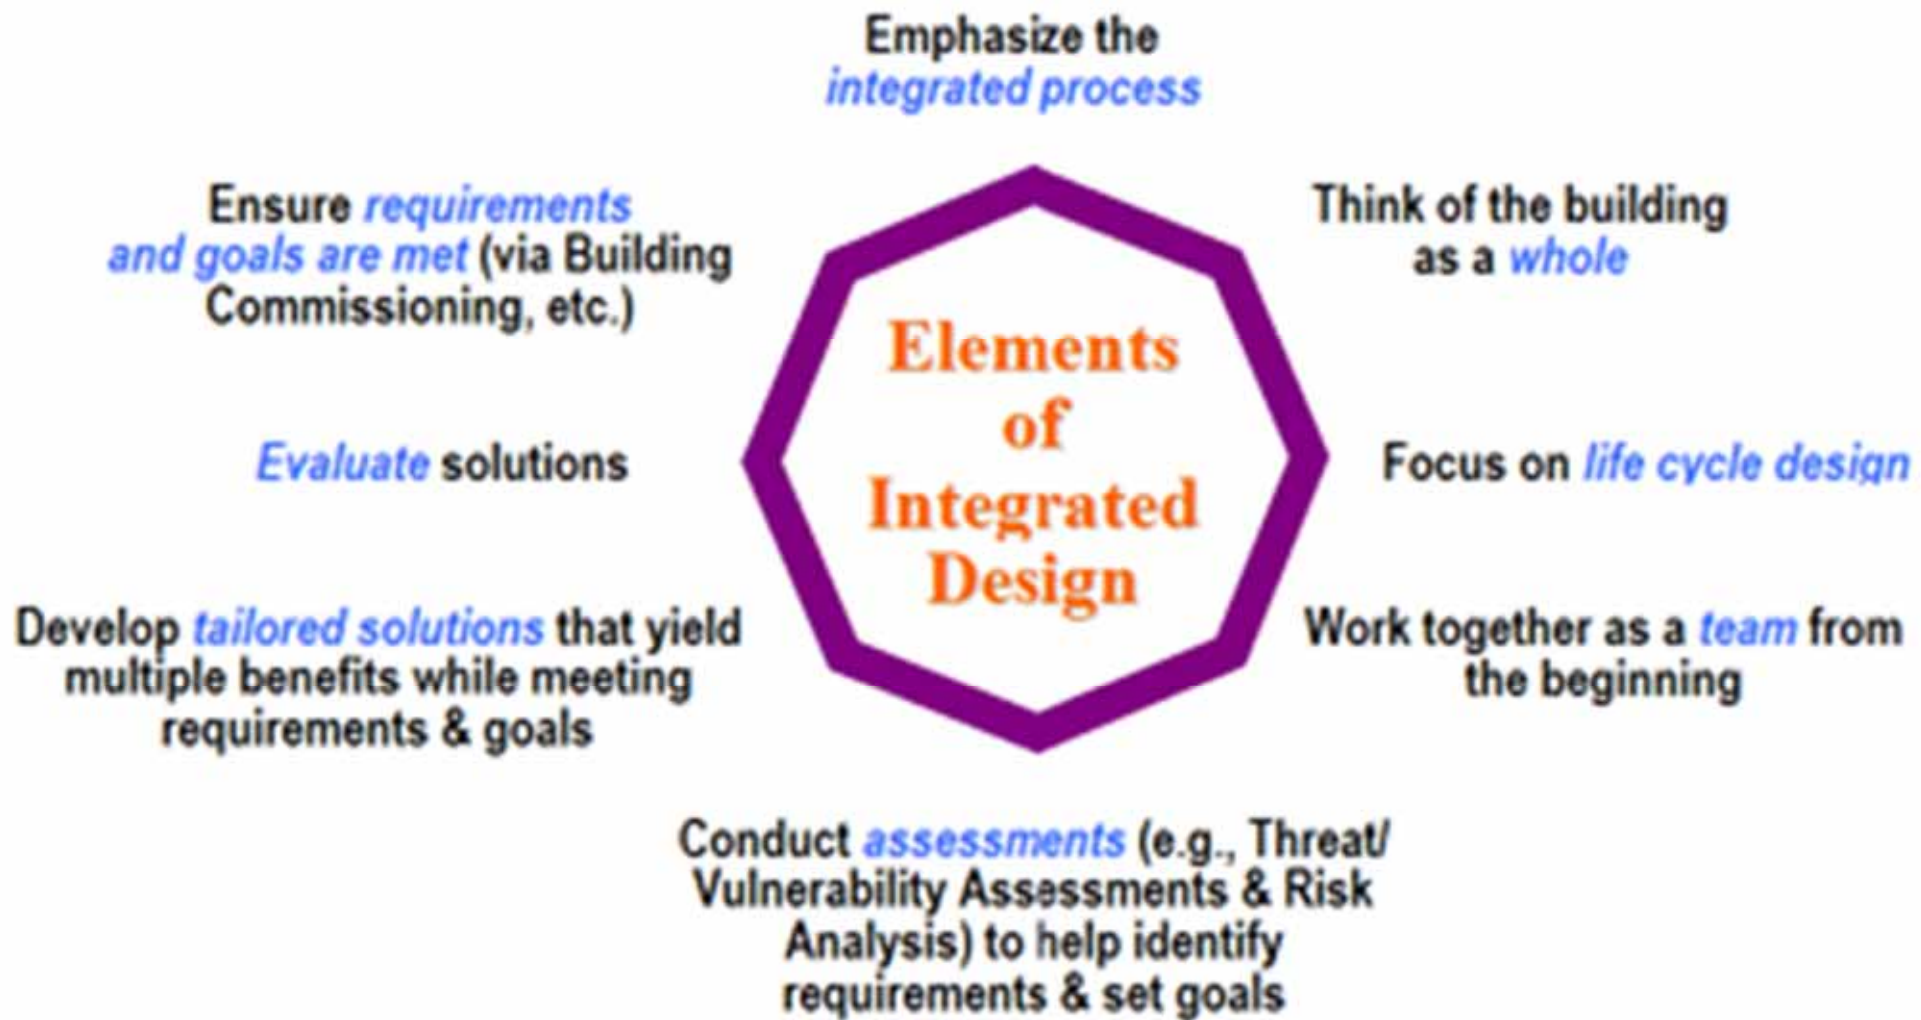




Integrated building design


- Typical integrated design process
 - Preparation
 - Design development
 - Contract documents
 - Construction phase
 - Commissioning
 - Post-occupancy evaluation
- Usually more efforts in preparation and pre-design phases



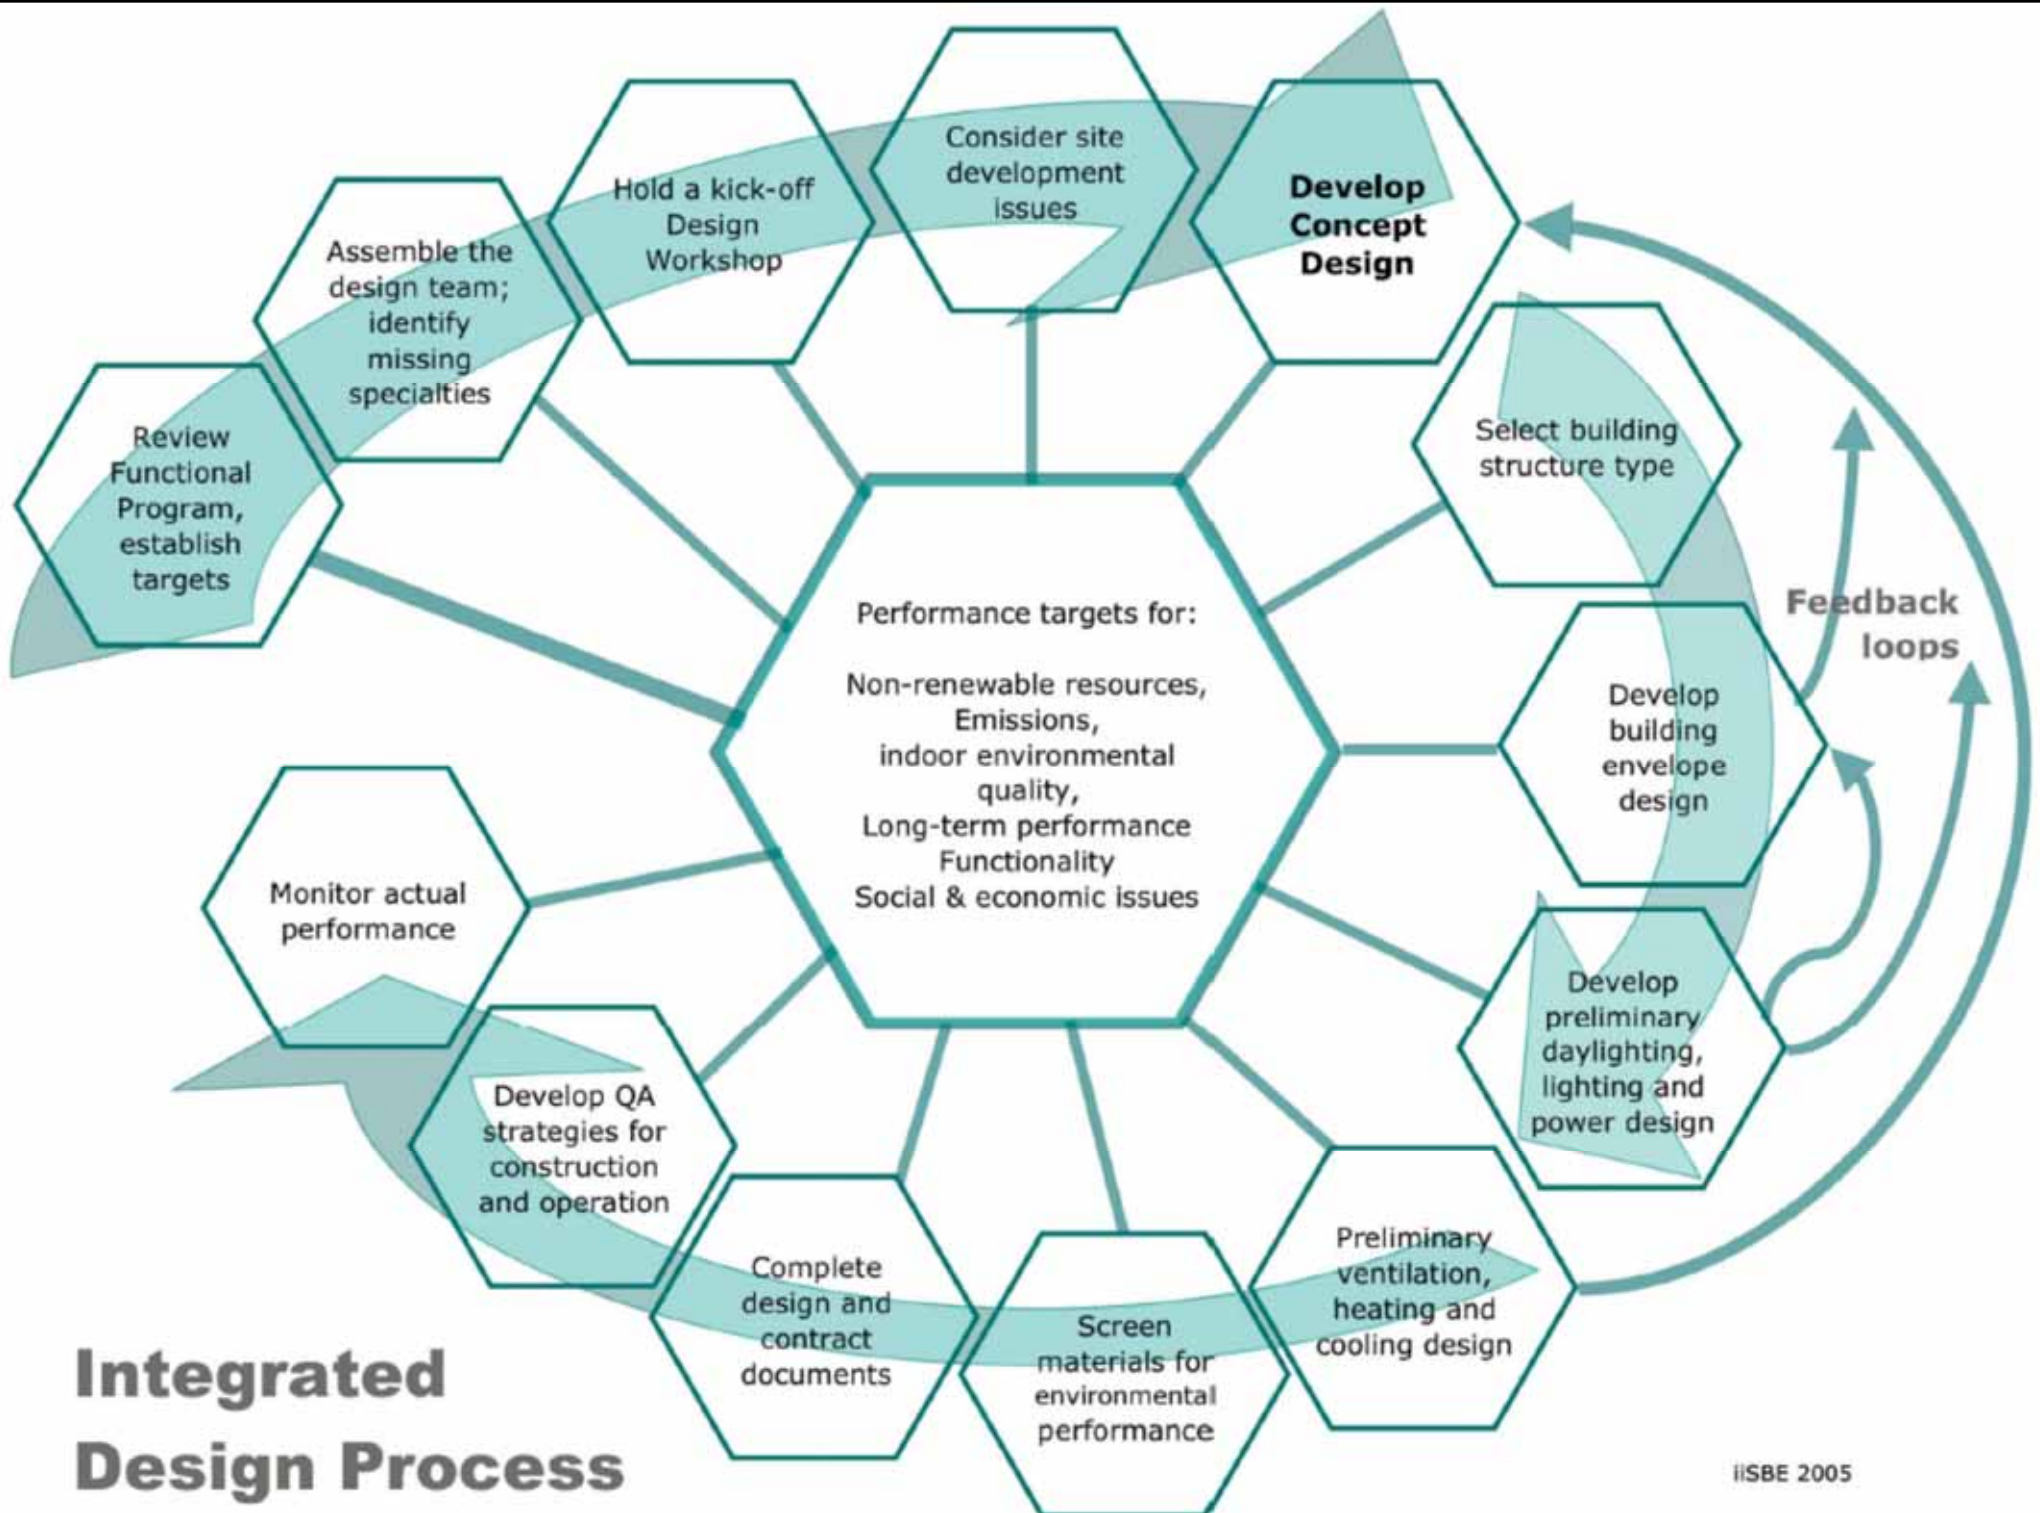

(Source: International Initiative for a Sustainable Built Environment (iiSBE), www.iisbe.org)

Integrated building design



- Integrated, multidisciplinary project team
 - Owner's representative
 - Architect
 - Building Services Engineer
 - Civil/Structural Engineer
 - Construction Manager
 - Landscape Architect
 - Specialized Consultants





Video Presentation



- Pennsylvania's First Green Building [29 min.]
 - Department of Environmental Protection
Southcentral Regional Office Building
 - Location: Pennsylvania, USA; completion: 1999



How many green team members?

Pennsylvania Department of Environmental Protection Harrisburg, Pennsylvania



LEED™ 1.0 Certification:
BRONZE



Notes from the Project Team: *LEED™ is an invaluable tool for Building Green in Pennsylvania projects which require an integrative design and measuring tool for High Performance Green Buildings.*

Sustainable Sites

- **Site Selection:** *Brownfield (once a quarry then landfill) and within the Harrisburg Area Economic Development Corridor*
- **Resource Protection:** *Leachate & Methane collection for remediation, indigenous plants, & Xeriscaping regenerate natural landscape*

Water Efficiency

- **Water:** *Complies with Energy Policy Act Of 1992, uses water saving fixtures*
- **Storm/Wastewater:** *Xeriscaping techniques help manage stormwater*

Energy and Atmosphere

- **Energy:** *Exceeds ASHRAE/IES Standard 90.1-1989 by 20%*
- **HVAC:** *Raised floor air plenum with individual control of air flow/temperature*
- **Controls/Monitoring:** *Energy and air monitoring systems measure temperature, relative humidity, and CO₂*
- **Power Source:** *Gas-Fired absorption chiller uses water as refrigerant*
- **Lighting:** *Split task indirect ambient with high reflectance ceiling tiles, T-8 lamps and light shelves enhance day lighting*

Materials and Resources


- **Structure:** *94% postindustrial Nucor recycled steel frame*
- **Recycled Content:** *25% of materials have substantial recycled content.*

Indoor Environmental Quality

- **Low Emitting Materials:** *Concrete floor with Low-VOC sealant*
- **Furniture:** *Conference room chairs' seat fabric made of wool & plant fiber--toxic free biodegradable. Panel fabric made of 100% post-consumer recycled plastic PET.*

Owner:	New Morgan Municipal Authority
Project Team:	Architect: <i>Kostecky Group</i>
	Engineer: <i>Deepal Wickramasinghe & N.K. Gunawardana</i>
	Contractor: <i>909 Partners as GC</i>
	Consultant: <i>Energy Opportunities, Carnegie Mellon University, Penn Energy Project & 21 other</i>
Building Statistics:	
Completion Date:	<i>May, 1998</i>
Cost:	<i>\$5.7 M</i>
Size:	<i>73,000 gross square feet</i>
Footprint:	<i>26,770 square feet</i>
Construction Type:	<i>Three story steel frame</i>
Use Group:	<i>Business (State Government Office Building)</i>
Lot Size:	<i>13.4 acres</i>
Occupancy:	<i>240 Employees</i>

Further Reading



- Whole Building Design Guide (WBDG)
 - Sustainable, www.wbdg.org/design/sustainable.php
- Sustainable Building Technical Manual
 - Chapter 5: Sustainable Site Design
 - Chapter 6: Water Issues
 - Chapter 13: Indoor Air Quality
- Integrated Design Process Guide
 - [http://www.cmhc-schl.gc.ca/en/inpr/bude/himu/coedar/upload/Integrated Design GuideENG.pdf](http://www.cmhc-schl.gc.ca/en/inpr/bude/himu/coedar/upload/Integrated_Design_GuideENG.pdf)