MEBS6020 Sustainable Building Design

http://www.hku.hk/bse/MEBS6020/



Green Building Assessment (I)



Dr. Sam C. M. Hui

Department of Mechanical Engineering
The University of Hong Kong
E-mail: cmhui@hku.hk

Contents



• Environmental Performance

Assessment Criteria

Assessment Methods








- Building environmental assessment*
 - <u>Identify</u> & <u>evaluate</u> the environmental effects of building development or operation
 - <u>Inform</u> decision making and <u>promote</u> sustainable design & management
- An objective assessment is a useful starting point from which to make design and building improvements

For supporting decision making

Environmental Performance



- Why environmental assessment?
 - Provide a common set of criteria & targets
 - Guide design decisions & choices
 - Raise awareness of environmental issues/standards
 - Recognise & encourage good practices
 - Stimulate the market for sustainable construction
 - Allow a verifiable method & framework
 - Enable policies & regulation (e.g. certificate/label)
 - Improve management & prioritization (incentives)

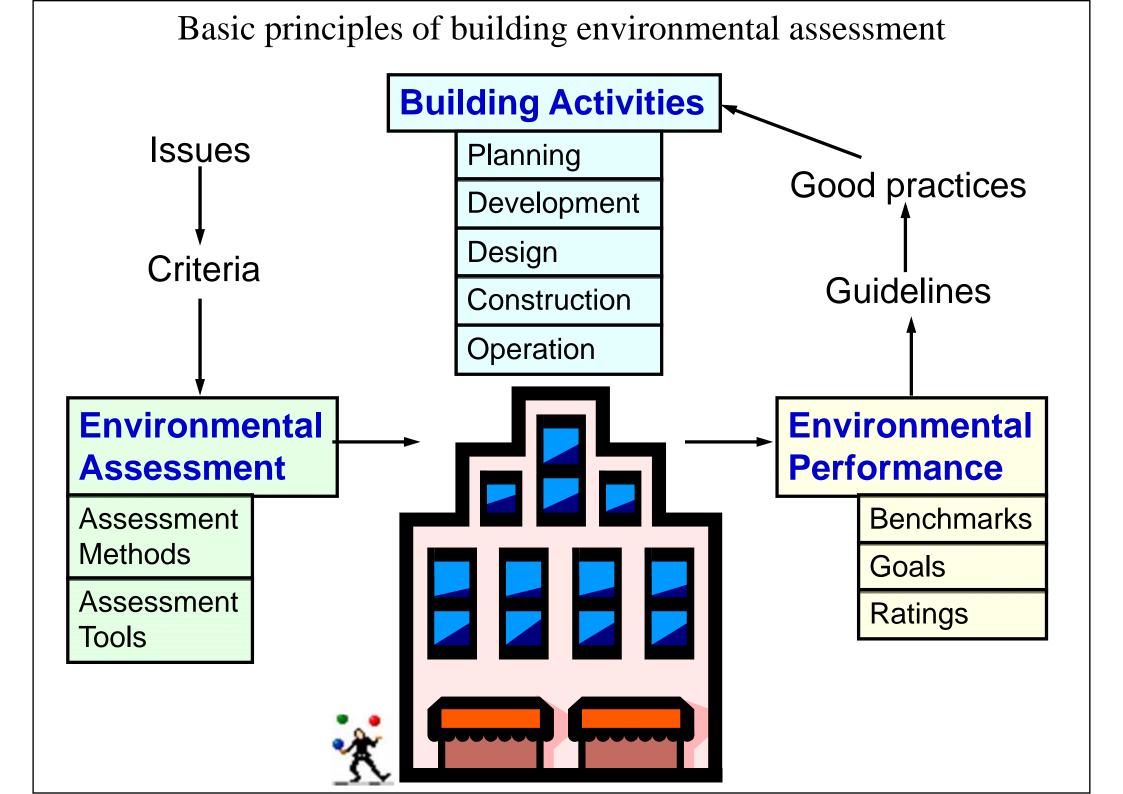

Environmental Performance




- <u>Design guidelines</u> provide a broader range of issues; <u>Assessment methods</u> give structure and priority, and provide strategic advice
 - Enhance environmental knowledge
- Enable *building performance* to be described
 - Performance-based indicators
 - Declared benchmarks
 - Prescriptive requirements (proxies for actual performance)

Environmental Performance




- Scope/Scale of the evaluation
 - Building products
 - Building processes
 - Structural members/elements
 - Building systems
 - Single buildings
 - Groups of buildings
 - District, urban, regional & city
- Building types: new, existing & refurbished

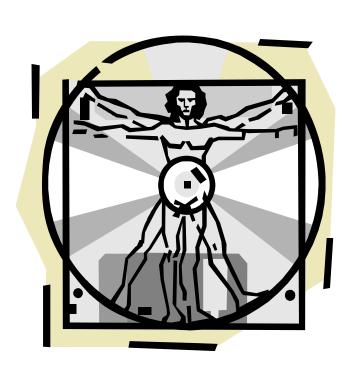

Assessment Criteria



- A broad range of criteria
 - Qualitative issues
 - Quantitative issues
- Types of criteria
 - Ecological vs health-related
 - Direct impacts vs indirect impacts
 - Immediate vs long-term implications
 - Global vs local

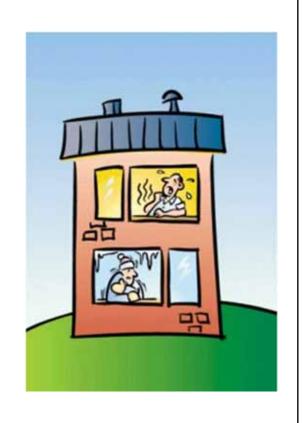



Source: www.moew.gov.ae



- site selection
- urban design
- landscape planning

- CO₂ emissions
- acid rain
- ozone depletion
- rainforest depletion
- environmental policy
- transport strategy
- building maintenance

- energy performance
- renewable energy
- water conservation
- Environmental Criteria & Factors
- material selection
- recycling of materials
- waste management
- disposal & reuse

- air quality
- thermal comfort
- lighting & noise
- hazardous materials

Assessment Criteria




- Assessment process
 - Examine the <u>performance</u> of a building or its subsystem against a declared set of criteria
 - Usually voluntary (aim to stimulate the market)
- Scale of performance
 - Measure & assess relative performance
 - Assign 'points' or 'score' to various aspects
 - Quantitative criteria: relative to a baseline
 - Qualitative criteria: presence/absence of such features

Assessment Criteria




- Assessing multiple criteria
 - Indicate the 'best' overall performance
 - Methodology
 - Cost (or monetary value \$)
 - Equivalence method (e.g. air/water pollution index)
 - EcoCost (in common Gaia scale 0-1)
 - EcoPoint or EcoProfile
- Weighting system
 - To show relative importance, scale and urgency

How to visualize assessment results?

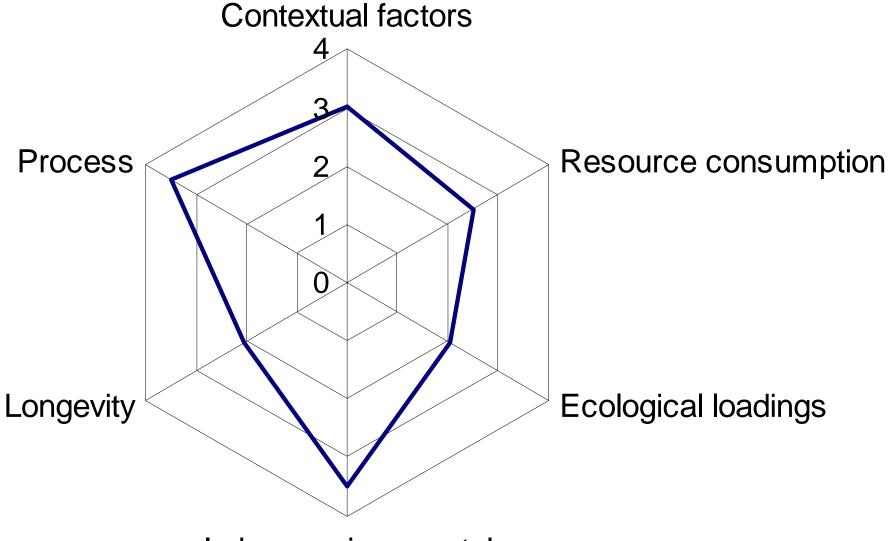

Indoor environmental quality

Radar chart for assessing multiple criteria

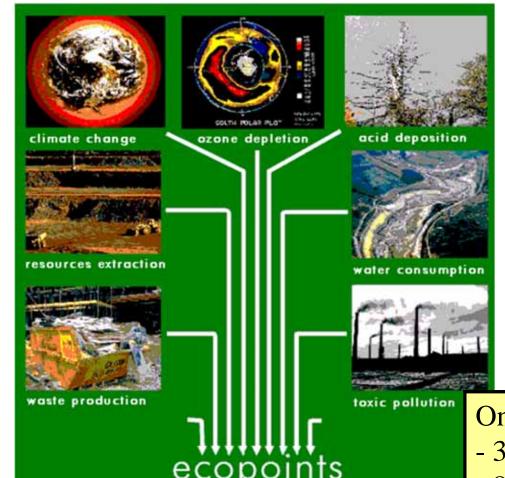

How to combine different criteria?

"Ecopoint" concept in the ENVEST (environmental impact estimating) tool (UK BRE)

One "ecopoint" is equivalent to:


- 320 kWh electricity
- 83 m² Water: enough to fill 1,000 baths
- 65 miles by articulated truck
- landfilling 1.3 tonnes of waste
- manufacturing 3/4 tonnes brick (250 bricks)
- 540 tonne kms by sea freight
- 1.38 tonnes mineral extraction
- 300 miles of urban driving in new petrol car



(Source: UK BRE)



- Common approaches
 - Checklists or forms
 - Computer-based methods
 - Spreadsheet or computer programs
- Models used
 - Environment model
 - Product model
 - Life cycle model
- Data required: from simple to very detailed

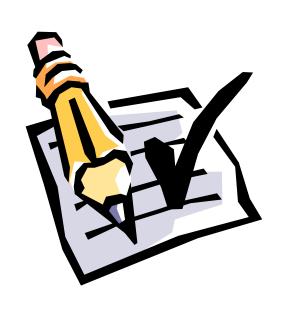

Rating tools of building environmental performances around the world



(Adapted from CASBEE in Progress for Market Transformation in Japan, by Prof. Kazuo Iwamura, Tokyo City University)



Further info: http://en.wikipedia.org/wiki/Green_building

- Examples
 - Europe:
 - BREEAM (UK)
 - CEPHEUS (Germany)
 - ECO-PRO (Germany)
 - EcoProP & PIMWAQ (Finland)
 - EQUER (France)
 - ECO QUANTUM (Netherlands)
 - MINERGIE (Switzerland)
 - BREEAM-NL (Netherlands)
 - VERDE (Spain)





- Examples (cont'd)
 - Canada & USA:
 - BREEAM-Canada & BEPAC-Canada
 - LEED Canada
 - LEED (USA)
 - BEES (USA) (for building products)
 - GreenGlobes (Canada & USA)
 - Australia & New Zealand
 - Green Star (Australia)
 - Green Office Scheme (New Zealand)



- Examples (cont'd)
 - Asian countries:
 - Japan Green Building Guide & CASBEE
 - Korea Green Building Rating System
 - GB/T 50378-2006 and GOBAS (Mainland China)
 - Taiwan Green Building Label (EEWH)
 - HK-BEAM and CEPAS (HK)
 - Green Mark Scheme (Singapore)
 - Green Building Index (Malaysia)
 - TGBRS, GRIHA, LEED India (India)





- BREEAM UK (since 1990)
 - Building Research Establishment Environmental Assessment Method
 - Used as a reference in many countries
 - BREAM family of assessment methods & tools
 - Any types of buildings (new and existing)
 - BREEAM International (outside of UK)
 - BREEAM In-Use (building management)
 - BREEAM Communities (planning stage)
 - Website: www.breeam.org/









- BREEAM UK (cont'd)
 - Credits awarded for a set of performance criteria
 - Energy, water, pollution, materials, transport, ecology and land use, health and well being
 - Construction & building operational management
 - A weighting system is applied to determine final rating
 - Stages of building development
 - Design & procurement
 - Management & operation
 - Post construction review

Assessment areas of BREEAM-UK

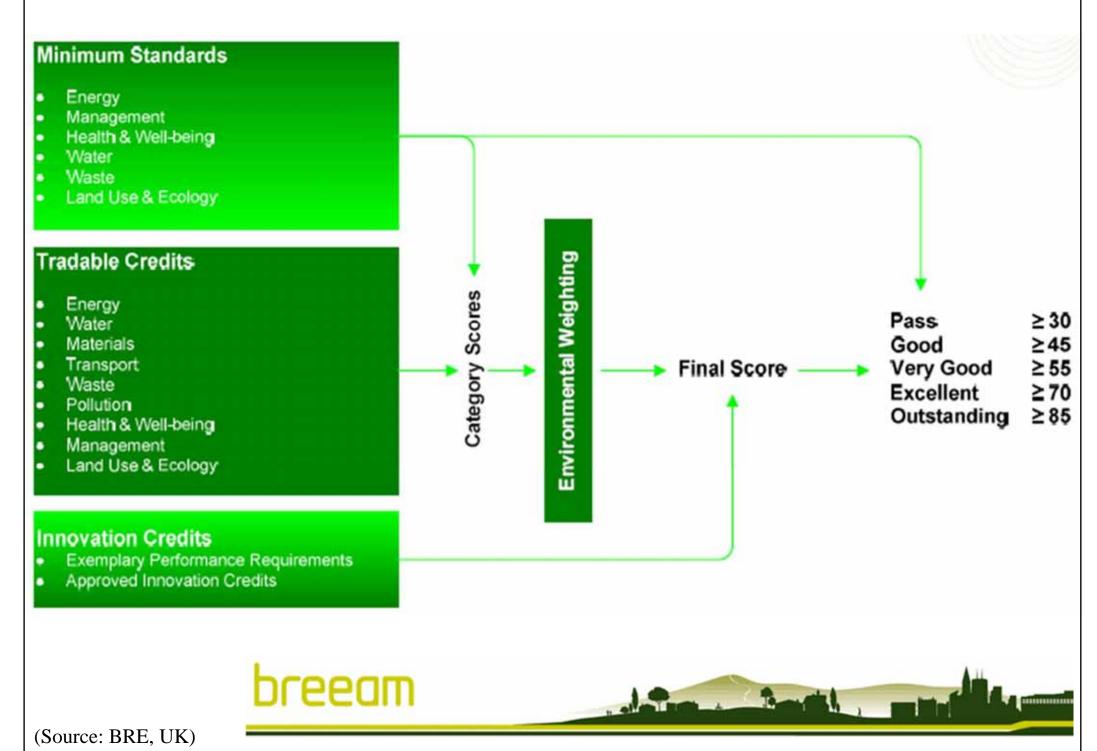

Assessment weightings of BREEAM-UK

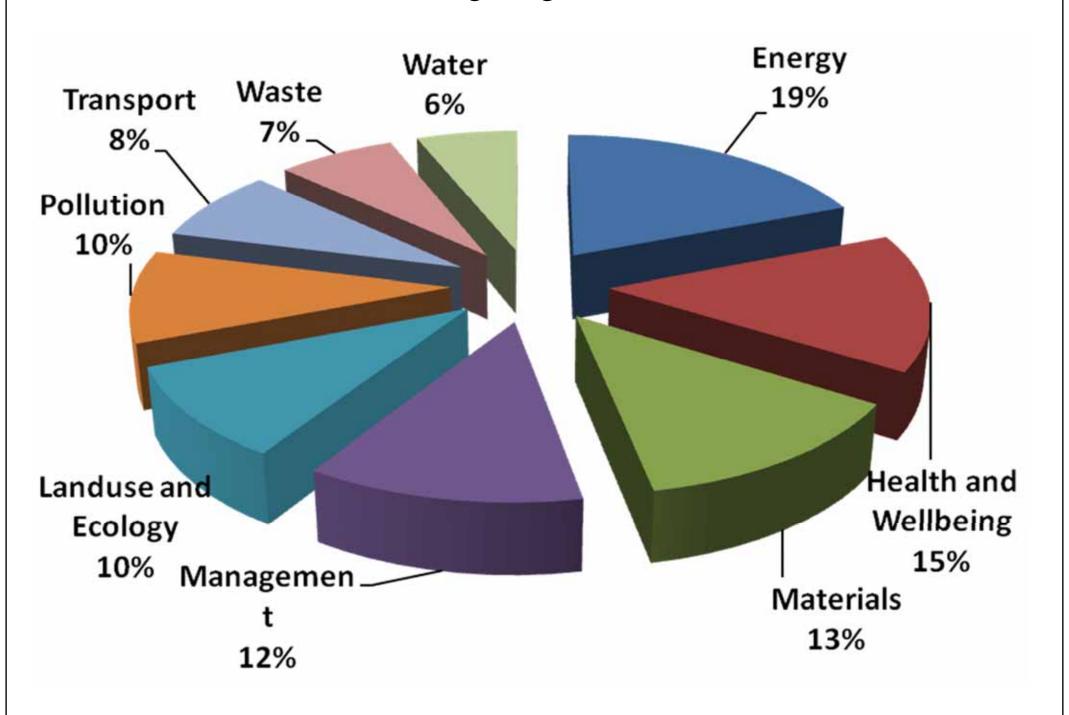

(Source: BRE, UK)



- BREEAM UK (cont'd)
 - Overall score rating:
 - Pass, Good, Very Good, Excellent, Outstanding
 - BREEAM Assessors
 - BREEAM Accredited Professional (BREEAM AP) and examination/training
 - Up to 3 credits if a BREEAM AP is engaged (BREEAM 2011)



- LEED Green Building Rating System
 - Leadership in Energy & Environmental Design
 - By US Green Building Council
 - Current LEED systems:
 - New construction (LEED-NC) or Building design and construction (BD+C)
 - Existing buildings operations & maintenance (LEED-EBOM) (O+M)
 - Commercial interiors (LEED-CI)
 - Core and shell (LEED-CS)
 - Homes, Schools, Healthcare, Retail
 - Neighborhood development (LEED-ND)

LEED Green Building Rating

HOMES NEIGHBORHOOD DEVELOPMENT COMMERCIAL INTERIORS CORE AND SHELL **EXISTING NEW CONSTRUCTION & MAJOR RENOVATIONS** BUILDINGS **SCHOOLS OPERATIONS &** RETAIL MAINTENANCE HEALTHCARE **BUILDING LIFE CYCLE** CONSTRUCTION DESIGN **OPERATIONS**

(Source: USGBC http://www.usgbc.org/leed)



- LEED Green Building Rating System
 - Evaluates and recognizes performance in accepted green design categories, including:



- Sustainable sites
- Water efficiency



- Energy and atmosphere
 - Materials and resources



- Indoor environmental quality
 - Innovation credits



Website: http://www.usgbc.org/leed





- LEED Green Building Rating System
 - Whole-building approach encourages & guides a collaborative, integrated design & construction process
 - Optimizes environmental and economic factors
- Four levels of certification (for version 2 or before)

• LEED Certified 26 - 32 points

• Silver Level 33 - 38 points

• Gold Level 39 - 51 points


Platinum Level 52+ points (69 possible)

LEED Accredited Professional



Which are the most important criteria?

LEED Point Distribution (version 2)

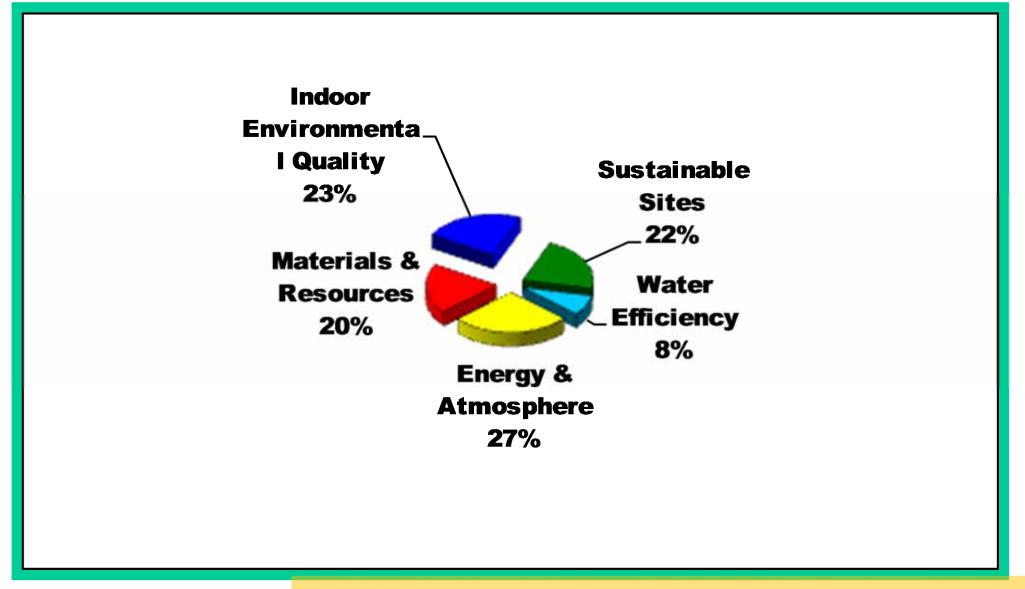

(Source: USGBC)

The relative importance of the criteria may change from one society to another one.

Phillip Merrill Environmental Center Headquarters Annapolis, Maryland



Owner: Chesapeake Bay Foundation

Project Team: Architect: SmithGroup, Inc.

Engineer: *SmithGroup, Inc.*P.Manager: *Synthesis, Inc.*

Contractor: Clark Construction Group
Consultant: Janet Harrison, Architect

Building Statistics:

Completion Date: November, 2000

Cost: \$6.36 M

Size: 30,600 gross square feet

Footprint: 12,000 square feet

Construction Type: 3B, Two Stories over Open Parking

Use Group: Business(B), Assembly(A-3), Storage(S-2)

Lot Size: 33 acres
Annual Energy Use: 23 kBtu/sf/year

Occupancy: 90 Staff

(Source: USGBC)



LEED™ 1.0 Certification: PLATINUM

Notes from the Project Team: $LEED^{TM}$ was instrumental in conveying the importance of the sustainable elements of the design to CBF's Board of Trustees.

- □ Sustainable Sites
 - Site Selection: Erected in Smart Growth Funding Area on footprint of existing structure. 26.6 acres remain undisturbed in Land Trust.
 - Educational Model: Interpretive trails & demonstrations for public visitors
 - Storm/Waste Water: All Composting Toilets & Bioretention/Wetland
 - Resource Protection: Woodland, Wetland, & Tidal Water Restoration
- Water Efficiency
 - Water: Rainwater Catchment & Reuse for Hand Washing & Irrigation
- Energy and Atmosphere
 - Domestic Hot Water: Thermomax-Solar Technology
 - Energy: Exceeds ASHRAE/IES Standard 90.1-1989 by 50%
 - HVAC: Natural Ventilation and Desiccant Dehumidification & Heat Recovery
 - Controls/Monitoring: Building Energy management System, "Green Light" notifies staff to open windows when outside conditions comply
 - Power Source: 30% Renewable with Geo-Exchange & Photovoltaics
 - **Lighting:** Daylight Harvesting and time clock lighting controls
 - Rapidly Renewable: Bamboo, cork and linoleum floorings
 - Recycled Content: Metal roofing and siding, acoustic ceiling, ceramic tile, and MDF cabinetry
- Materials and Resources
 - Structure: Rapidly Renewable-Paralam Post, Beam, and Truss system
 - Envelope: Structural Insulated Panels (SIP) R-20 walls, R-30 roof
- Indoor Environmental Quality
 - Indoor Environmental Quality: CO2 and VOC monitors.
 - Furniture: Small, open offices allow for communal space. Systems furniture allows flexible layout to accommodate "churn"





- Lessons Learned the First Year [27 min.]
 - Pennsylvania DEP Southcentral Regional Office Building (first green building)
 - What can be learned?
 - The occupant's role
 - Green building assessment: LEED
 - INTEGRATED DESIGN
 - Where to get the LEED credits?

A real-life example in USA



- LEED version 3 and new schemes
 - Include other criteria
- Locations & linkages
- Awareness & education



- P
- Regional priority
- LEED Professionals
 - LEED Green Associate
 - LEED AP (different types)
 - Bldg design & construction, O&M, Homes, Interior design, Neighborhood development

LEED® for New Construction

Total Possible Points**	110*
Sustainable Sites	26
Water Efficiency	10
Energy & Atmosphere	35
Materials & Resources	14
Indoor Environmental Quality	15


- *Out of a possible 100 points + 10 bonus points
- ** Certified 40+ points, Silver 50+ points, Gold 60+ points, Platinum 80+ points

6	Innovation in Design	6
9	Regional Priority	4

LEED[®] for Existing Buildings


Total Possible Points**		110*	
Susta	inable Sites	26	
Water	r Efficiency	14	
Energ	y & Atmosphere	35	
Mater ■ Mater	rials & Resources	10	
(3) Indoo	r Environmental Quality	15	

- * Out of a possible 100 points + 10 bonus points
- ** Certified 40+ points, Silver 50+ points, Gold 60+ points, Platinum 80+ points

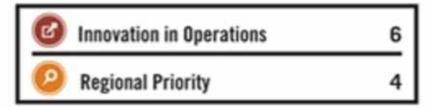

For LEED version 3

LEED NC point distribution (version 2009)

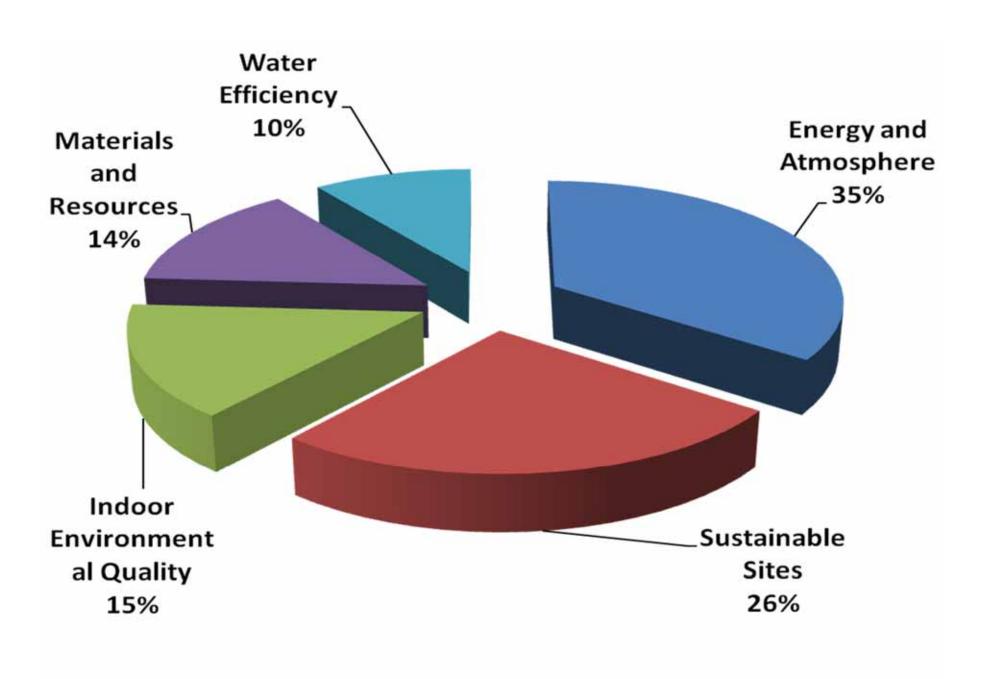

(Source: USGBC)



- LEED v4 (launched in 2014)*
 - Location & Transportation (LT)
 - Sustainable Site (SS)
 - Water Efficiency (WE)
 - Energy and Atmosphere (EA)
 - Materials and Resources (MR)
 - Indoor Environmental Quality (EQ)
 - Innovation (IN)
 - Regional Priority (RP)















- CASBEE (Comprehensive Assessment System for Building Environmental Efficiency), Japan
 - Tool-0: Pre-design
 - Tool-1: New Construction
 - Tool-2: Existing Buildings
 - Tool-3: Renovation
 - Website: www.ibec.or.jp/CASBEE/



CASBEE Building Lifecylce and Four Assessment Tools


Design process	Pre-design		Design		Po	ost-desi	gn	
Building lifecycle	Planning	New Basic design	Constru Design for execution	Construc	Operation	Reno Design	Vation Construct ion	Operation
Tool-0 CASBEE for Pre-Design	Pre-design ass of building plant selection etc.	me 2007			Labeling			
Tool-1 CASBEE for New Construction		design spe	nt of new ion (Assess cification ar performan	nd	Labeling			Labeling
Tool-2 CASBEE for Existing Building					Assessment of existing buildings (Assess the actual specification and performance realized at the time of assessment)			Assessment of existing buildings (Assess the actual specification and performance realized at the time of assessment)
Tool-3 CASBEE for Renovation								

(Source: IBEC, Japan)



- CASBEE system:
 - CASBEE for New Construction
 - CASBEE for Existing Building
 - CASBEE for Renovation
 - CASBEE for Heat Island
 - CASBEE for Urban Development
 - CASBEE for an Urban Area + Buildings
 - CASBEE for Home (Detached House)



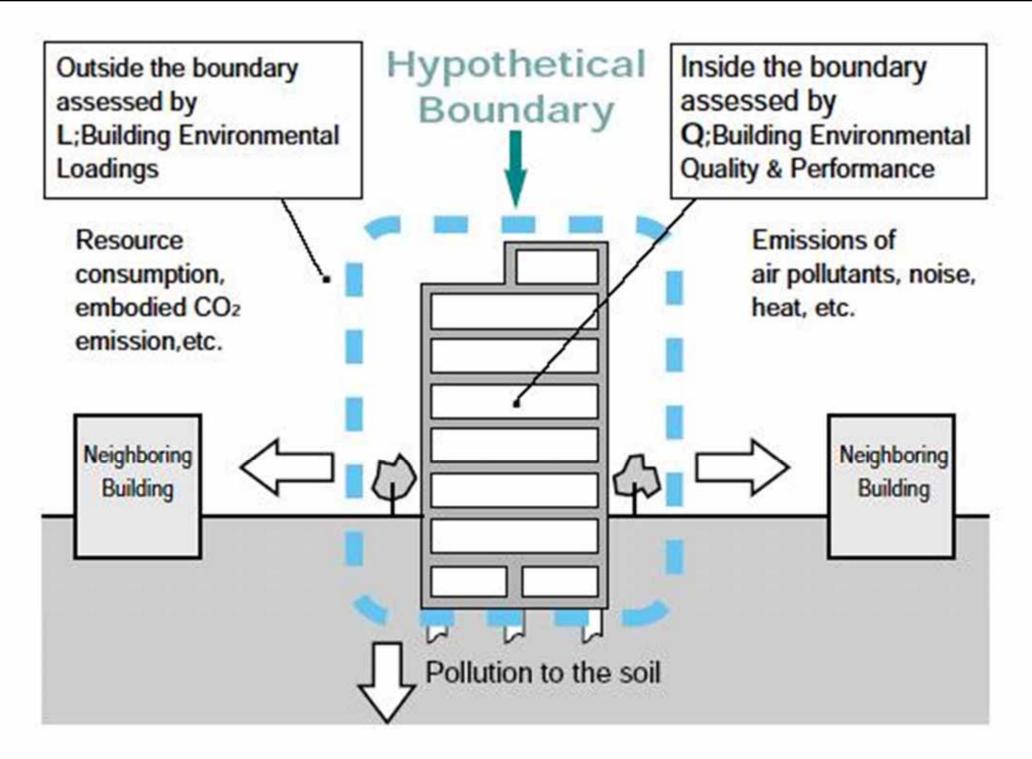

(Source: IBEC, Japan)

From Eco-efficiency of a building to BEE

Original definition: (WBCSD) Values of products or services

Environmental load unit

J

Beneficial output

Modeled definition:

Input +Non-beneficial output




Definition of BEE in CASBEE:


Building Environmental Quality & Performance
Building Environmental Loadings

Building Environmental Efficiency (BEE)

Building Environmental Quality & Performance
Building Environmental Loadings

(Source: IBEC, Japan)

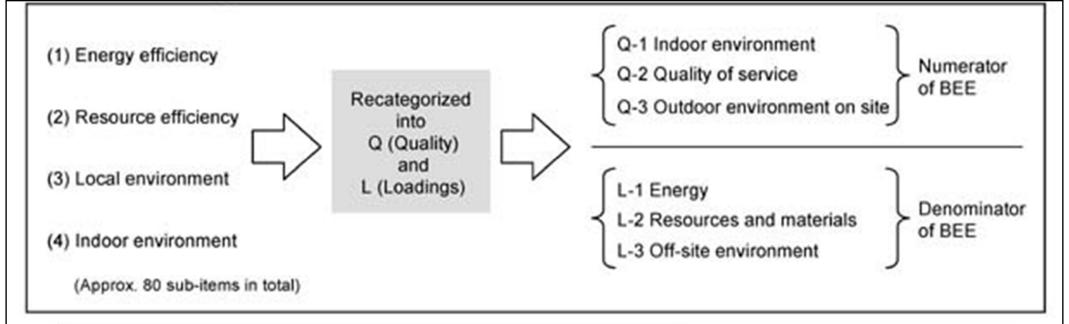

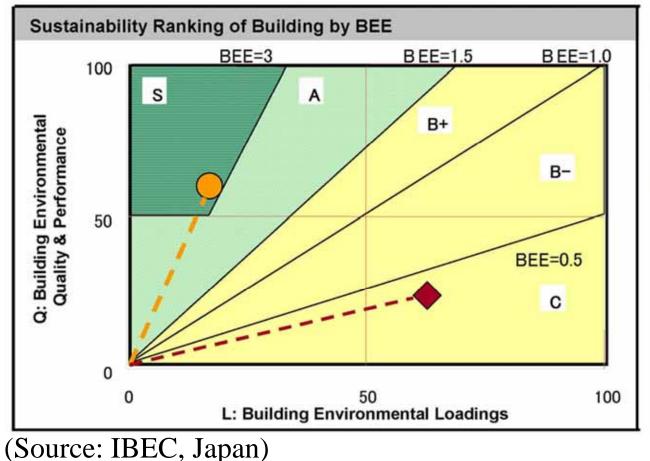

 $B+=\star\star\star$ $B-=\star\star$ $C=\star$

: Ordinary Building

: Sustainable building

CASBEE Ranking:

 $S = \star \star \star \star \star$

 $A = \star \star \star \star$

(Sample)

CASBEE[®]評価内容

CASBEE-新築(簡易版)

評価ツール CASBEE-NCb_2006v1. : 認証番号 IBEC-C0046-NCb(c) 交付日 2009年3月10日

建物名称 NBF豊洲ガーデンフロント

建物用途 事務所

建設地 東京都江東区豊洲5丁目6-7

気候区分 -

竣工日 2007年9月30日


敷地面積 12,551.33㎡ 建築面積 5,092.29㎡ 延床面積 36,310.82㎡ 階数 地上10階

20

構造 S造 平均居住人員 5.660人

年間使用時間 2

2,500時間/年

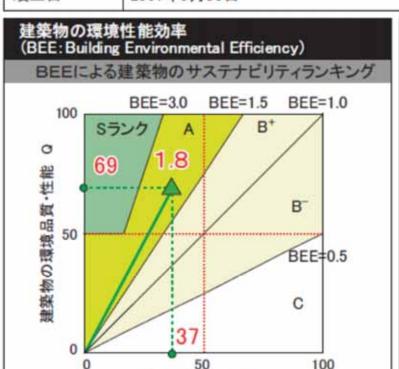


建築物の環境負荷 L




BEE =
$$\frac{$$
建築物の環境品質・性能 Q $}{$ 建築物の環境負荷 L $} = \frac{25 \times (Sq-1)}{25 \times (5-SLR)} = \frac{69.0}{37.0} = 1.8$

(Source: IBEC, Japan)

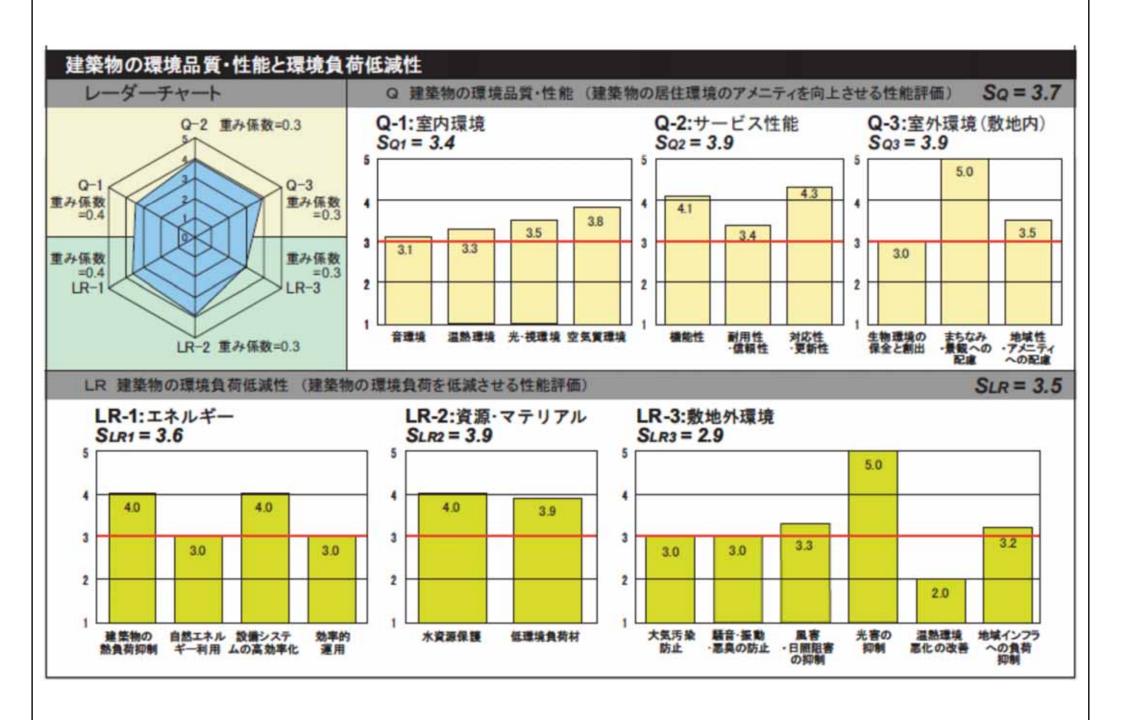

(Source: IBEC, Japan)

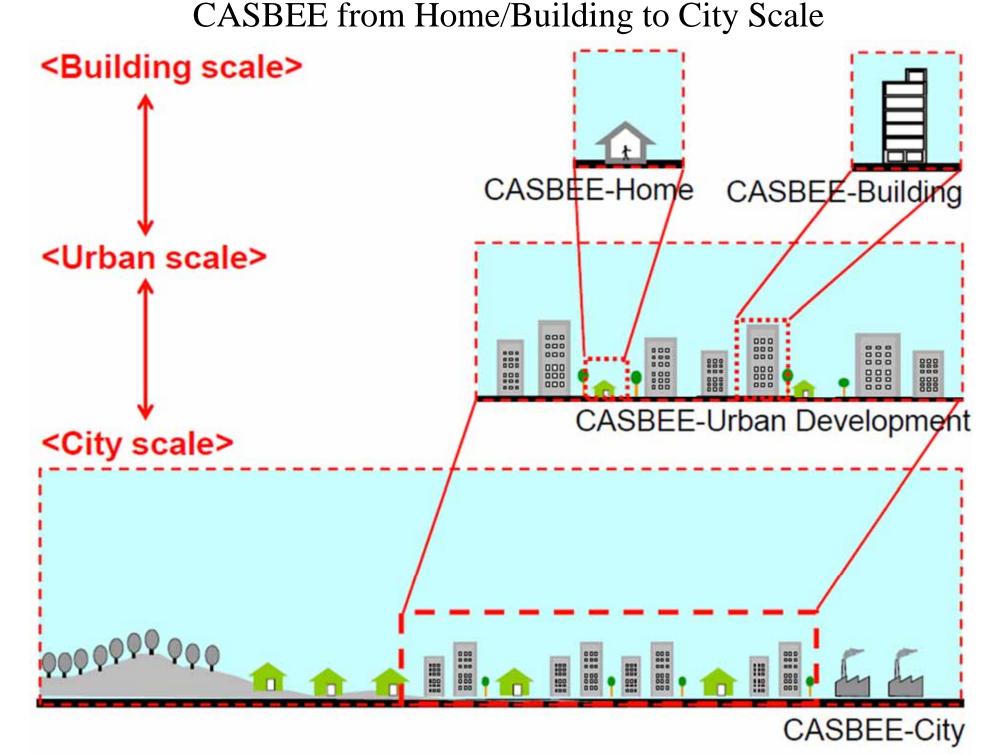


(Adapted from CASBEE in Progress for Market Transformation in Japan, by Prof. Kazuo Iwamura, Tokyo City University)

Korea's Green Building Rating System Criteria (multi-residential building)


Section	Resource Consump- tion	Environ- mental Loadings	Quality of Indoor Environ.	Longevity	Process	Contextual Factors
Criteria (Number)	- energy (8) - land (3) - water (2) - materials (7)	- airborne emissions (17) - solid waste (4) - liquid waste (4) - other loadings (2)	- air quality (10) - thermal quality (4) -visual quality (7) - noise & acoustics (3) - controll- ability of system (2)	- adapt- ability (5) - mainten- ance of perform- ance (6)	- design & construction process (6) - building operations planning (7)	- location & trans-portation (1) - loadings on immediate surroundings (4)
Total(102)	20	27	26	11	13	5

^{*} Source: Green Building Council of Korea (www.gbc-korea.co.kr)



- Green Mark (GM) Scheme, Singapore
 - Started 2005 (mandatory)
 - http://bca.gov.sg/GreenMark/green_mark_criteria.html
 - Categories:
 - Non-Residential New Buildings
 - Residential New buildings
 - Existing Buildings
 - Office Interior
 - Landed Houses
 - Infrastructure
 - District





- Green Mark (GM) Scheme, Singapore
 - Assessment criteria
 - Energy Efficiency [79]
 - Water Efficiency [14]
 - Environmental Protection [32]
 - Indoor Environmental Quality [8]
 - Other Green Features and Innovation [7]
 - GM ratings: max 140 + 20 bonus points
 - Platinum (90+), GoldPlus (85-90), Gold (75-85) or Certified (50-75)
 - Re-assess every 3 years to maintain GM status






- Green Building Index (GBI), Malaysia
 - Started 2009 (<u>www.greenbuildingindex.org</u>)
 - New Construction (NC)
 - Non-residential (NRNC) and residential (RNC)
 - Procedures:
 - Stage 1. Application & Registration
 - Stage 2. Design Assessment
 - Stage 3. Completion & Verification Assessment
 - GBI Accreditation Panel (GBIAP)
 - GBI Certifiers and GBI Facilitators



- Green Building Index (GBI), Malaysia
 - Six main criteria: [max. point for new construction]
 - Energy Efficiency (EE) [35]
 - Indoor Environment Quality (EQ) [21]
 - Sustainable Site Planning & Management (SM) [16]
 - Materials & Resources (MR) [11]
 - Water Efficiency (WE) [10]
 - Innovation (IN) [7]
 - Total score = 100
 - GBI ratings: Certified (50-65), Silver (66-75), Gold (76-85) and Platinum (86+)



- Mainland China
 - GB/T 50378-2006, Evaluation Standard for Green Building (綠色建築評價標準)
 - Similar to LEED in structure and rating process
 - A three-star Green Building certificate will be awarded to the qualified buildings
 - Green Olympic Building Assessment System (GOBAS) (綠色奧運建築評核系統)
 - Developed from the Japan's CASBEE method
 - Applied mainly in Beijing




Evaluation Standard for Green Building – China (Three Star System)

			y.	General	Items (40)			Preference Options
	Grade	Land Use and Outdoor Environment (8)	Energy Efficiency (6)	Water Efficiency (6)	Material and Resources (7)	Indoor Environmental Quality (6)	Operation & Management (7)	(9)
	*	4	2	3	3	2	4	33
Residential Building	**	5	3	4	4	3	5	3
	***	6	4	5	5	4	6	5
				Preference				
Public	Grade	Land use and outdoor environment (8)	Energy Efficiency (6)	Water Efficiency (6)	Material and Resources (8)	Indoor Environment Quality (6)	Operation & Management (7)	Options (14)
Building	*	3	4	3	5	3	4	<u> </u>
	**	4	6	4	6	4	5	6
	***	5	8	5	7	5	6	10


(Source: Dr. JIANG Wei)



Evaluation Standard for Green Building – China Assessment categories and weighting

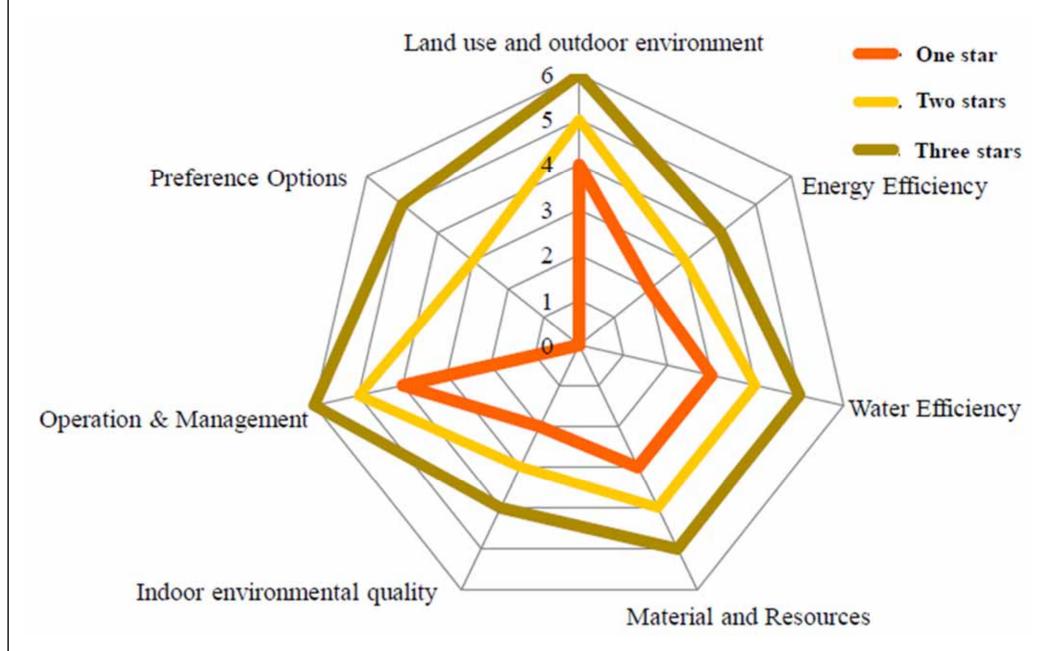


(Source: Dr. JIANG Wei)



- Taiwan Green Building Label (EEWH)
 - Nine sets of assessment criteria/indicators:
 - 1. Biodiversity 生物多樣性
- Ecology 2. Greenery 綠化量
 - 3. Water retention 基地保水
- Energy 節能 4. Energy efficiency 日常節能
- Waste reduction 減廢
- 5. Carbon dioxide reduction CO₂減量
- 6. Waste reduction 廢棄物減量
- 7. Indoor environment 室內環境
- Health 健康
- 8. Water resources 水資源
 - 9. Wastewater and garbage 污水拉圾改善




(Sources: www.taiwangbc.org.tw, www.cabc.org.tw)



- Taiwan Green Building Material
 - General
 - Low emission healthy
 - Recycling
 - High-performance
 - Ecological
- Website: http://gbm.tabc.org.tw/







HK-BEAM



HONG KONG BUILDING ENVIRONMENTAL ASSESSMENT METHOD
香港建築環境評估法

- Previous versions:
 - Version 1/96R for new office designs
 - Version 2/96R for existing office buildings
 - Version 3/99 for new residential buildings
 - Hotel Building Environmental Assessment Scheme (HBEAS)
- Issues covered:
 - Global issues & use of resources
 - Local issues
 - Indoor issues








HONG KONG BUILDING ENVIRONMENTAL ASSESSMENT METHOD
香港建築環境評估決

- Versions 2004:
 - HK-BEAM 4/04 New Buildings
 - HK-BEAM 5/04 Existing Building
- Approach and criteria
 - Site aspects
 - Materials aspects
 - Energy use
 - Water use
 - Indoor environmental quality (IEQ)
 - Innovation & performance enhancements





HK-BEAM



HONG KONG BUILDING ENVIRONMENTAL ASSESSMENT METHOD 本洪建筑環境評估法

- Weighting system to reflect
 - Relative importance of criteria
 - Relative areas of the spaces
- Overall assessment grade (IEQ must meet min. %)


Platinum 75% (Excellent) min. IEQ 65%

• Gold 65% (Very Good) min. IEQ 55%

• Silver 55% (Good) min. IEQ 50%

Bronze 40% (Above average) min. IEQ 40%

Website: www.hk-beam.org.hk



- BEAM Plus development
 - Version 2009: (Nov 2009)
 - BEAM Plus for New Buildings
 - BEAM Plus for Existing Buildings
 - Version 1.1 (Apr 2010)
 - With minor refinements
 - Introduce BEAM Professionals
 - Version 1.2 (Jul 2012)
 - Addresses issues on passive design
 - Minor amendments to other aspects
 - Starting from 1 Jan 2013, version 1.2 must be used





BEAM Plus assessment criteria [credits] [weighting]


New Buildings	Existing Buildings
Site aspects (SA) [22+3B] [25%]	Site aspects (SA) [18+1B] [18%]
Materials aspects (MA) [22+1B] [8%]	Materials aspects (MA) [11+2B] [12%]
Energy use (EU) [42+2B] [35%]	Energy use (EU) [39+2B] [30%]
Water use (WU) [9+1B] [12%]	Water use (WU) [7+2B] [15%]
Indoor environmental quality (IEQ) [32+3B] [20%]	Indoor environmental quality (IEQ) [30+3B] [25%]
Innovations and additions (IA) [5B+1]	Innovations and additions (IA) [5B+1]







(Source: http://www.beamsociety.org.hk)




- BEAM Plus (Version 1.1 or 1.2)
 - Overall grade: (with min. for SA, EU and IEQ)

	Overall	Site Aspects	Energy Use	IEQ	Innov. & Addn.	
Platinum	75%	70%	70%	70%	3 credits	Excellent
Gold	65%	60%	60%	60%	2 credits	Very Good
Silver	55%	50%	50%	50%	1 credit	Good
Bronze	40%	40%	40%	40%		Above Average




- BEAM Plus Interior (Aug 2013)
 - Green Building Attributes (GBA) [8]
 - Management (MAN) [1p, 10]
 - Materials Aspects (MA) [3p, 26]
 - Energy Use (EU) [26]
 - Water Use (WU) [6]
 - Indoor Environmental Quality (IEQ) [24]
 - Innovations (IV) [10]






- BEAM Professionals (BEAM Pro)
 - Accredited by HK Green Building Council (HKGBC) (www.hkgbc.org.hk)
 - Facilitate BEAM Plus submission
- BEAM Assessors (BAS)
 - Undertake the building assessment on behalf of HKGBC
- Green Building Faculty
 - Experienced professionals to drive BEAM Plus & BEAM Professionals development and training
- BEAM Affiliate (BA)
 - Sub-professionals to support green building design, construction and operations






- Comprehensive Environmental Performance Assessment Scheme (CEPAS) for Buildings
 - A consultancy study is commissioned by Buildings Department to develop this scheme
 - Building types:
 - Residential
 - Non-residential
 - Applications: new buildings, major addition & alternation, existing buildings

Further info: http://www.bd.gov.hk/english/documents/index_CEPAS.html





- Comprehensive Environmental Performance Assessment Scheme (CEPAS) for Buildings
 - Four main stages:
 - Pre-design
 - Design
 - Construction
 - Operation
 - Eight performance categories
 - Loading, Resources use, IEQ, Building amenities, Site amenities, Neighborhood amenities, Neighborhood impacts, Site impacts

Building life cycle stages for CEPAS (2006)

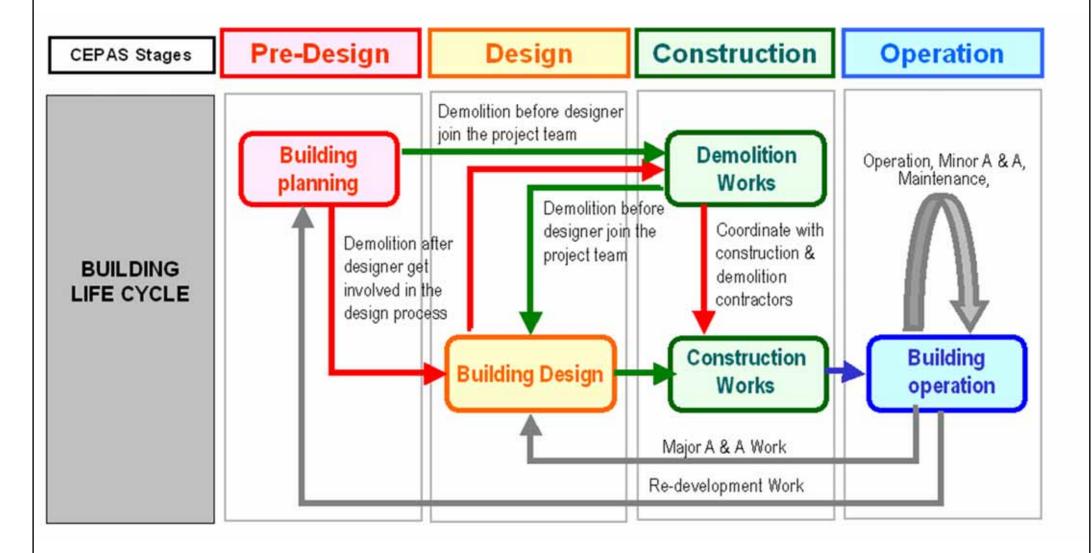

(Source: Executive Summary for CEPAS)

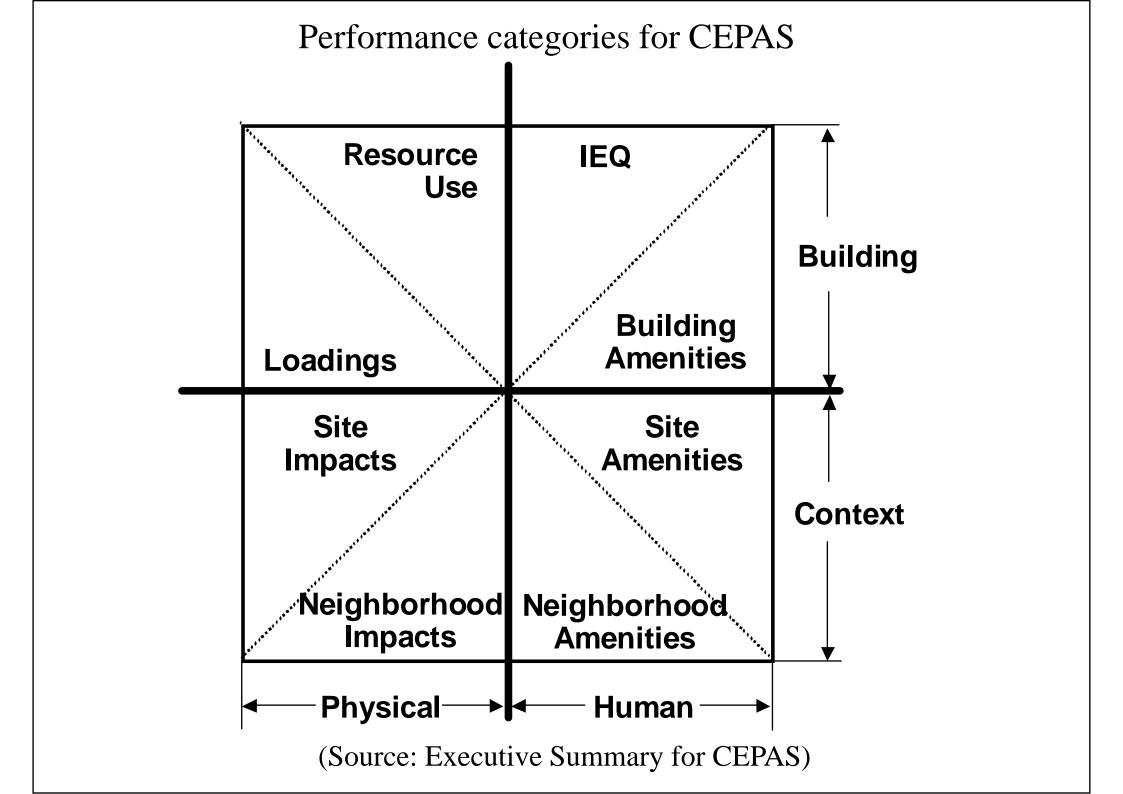

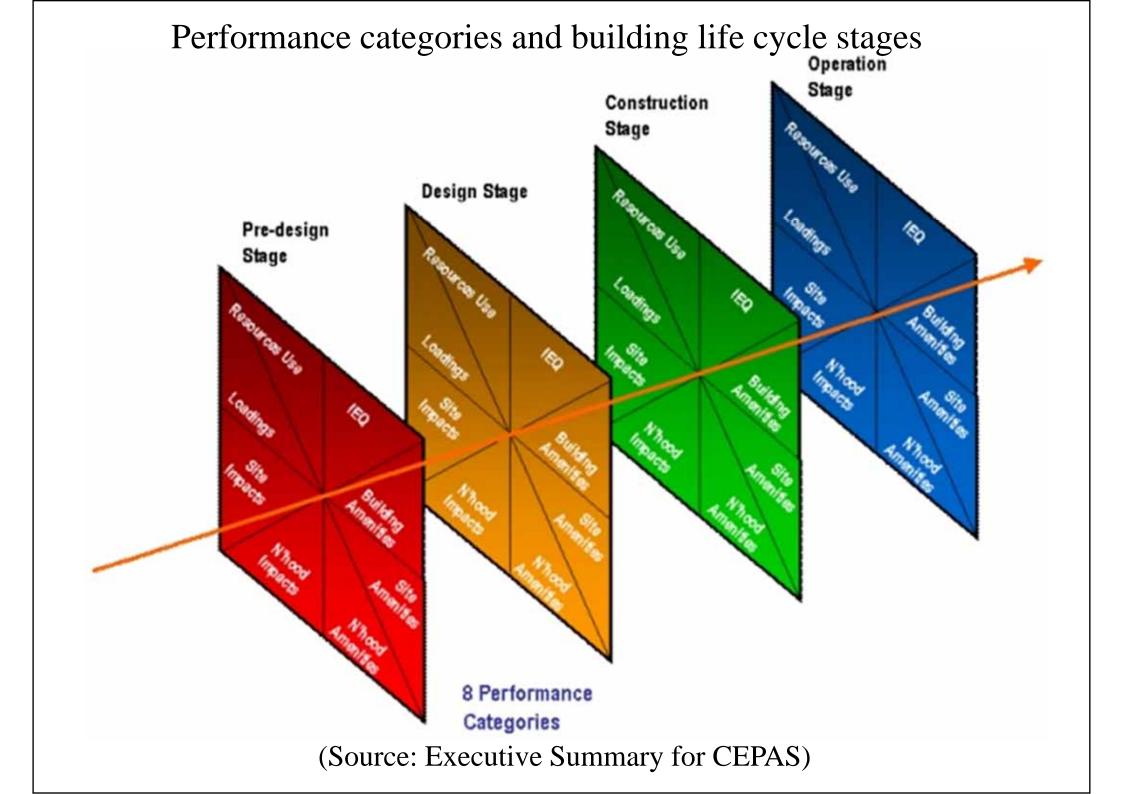




- GBTool
 - GBC (Green Building Challenge) for 19 countries
 - Issues considered
 - Resource consumption (R)
 - Environmental loadings (L)
 - Indoor environmental quality (Q)
 - Quality of service (**S**)
 - Economics (**E**)
 - Pre-operations management (M)
 - Architectural quality (? not included)



	411 11	GBT2k Building Performance Rate	ina	Svs	tem			a Wanni neces Om			
(BT2k				/			V	ersion	1.05 200	0.05.19
		Performance Assessment Sheet						GBC default	User defaul	t	
	Building Name:	Mon Repos MegaCentre	Si	ve	0	Hioe B	uilding		0	Sel	ect
	Building Type:	Office Building	Rev	besi	Multi-Unit Residential		•	0		Nary	
		Daylit, low-energy version	100	ghts			School		0	Buildin	g rype
	City & Country:	Toronto, Canada									
		ssment and Context vorksheets, information is available at various levels of detail. Click on					Ente	r Scare o		Emi	
_	the small buttons at the upper left marked 1,23,4 or 5, to see the results.				-			EnterV		Élotás	25%
-		ndicate that the parameter is theoretically relevant, but that an assessment is not possible or	-	-	-			Fontul		S no	3.0
-	Note that dummy scores have been entered into this version of the system. This means that some scores may not make sense - e.g. if a parameter is non-applicable for a certain building type but applicable to another type, there is likely to be a score entered. However, the weighted score will still make sense, since weights are automatically set to sero if the parameter is non-applicable.		-	-			a field linked to other s suffs or weighted scor			mation lields for user entry	32
-			-	-	K	csuns	or weigh			2.5	
-			-	Par	Formula field linked to other scores: Results or weighted score field: I typerlink: Brameter or lext depends on building type:						
	Performance R	elative to Appropriate Benchmarks	Scoring	_		in the same	hting	and so	COLUMN TO A		
R	RESOURCE	E CONSUMPTION		Score	ub-criteri	Vtd.	Score	Criterion	Wid.	20.75	Wid.
				-210-5		score	-210-5	Weight	score	Veight	score
	LOADINGS			Score	ub-criteri	On Vid.	Score	Criterion	Wid.	Cate	Wid.
-	LOADINGS			-210-5	Indiana and a	\$6010	-210-5	Weight	20010	Veight	score
				S	ub-criteri	on.		Criterion		Cate	gory
Q	INDOOR E	NVIRONMENTAL QUALITY		-210-5	Links	VAd score	-210-5	Weight	Mid. score	Veight	Wid.
-	OLIVE TITLE				ub-criteri		1	Criterion		Cate	pory
5	QUALITY	OF SERVICE		Score -2 to -5		Vtd. sooie	-210-5	Weight	Wid. score	Veight	Vid.
E	ЕСОМОМІС	S			А	sses	sor's	Note	•		
М	PRE-OPER	ATIONS MANAGEMENT			А	sses	sor's	Note	3		

Source: http://greenbuilding.ca/GBIC.htm

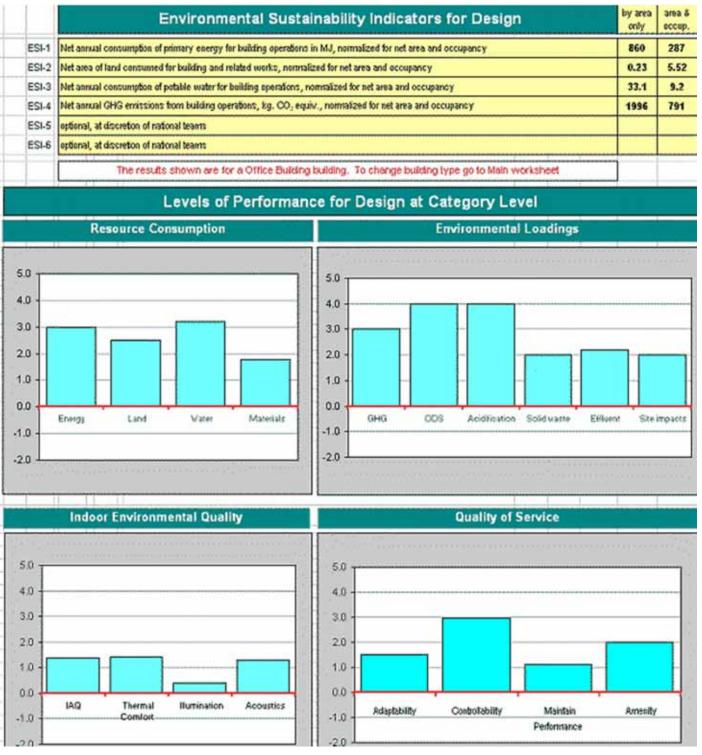

Source: http://greenbuilding.ca/GBIC.htm



- Green Building Challenge (GBC)
 - An international process, initiated by Canada
 - Examples of green buildings in the world
 - GBC 1998 (Vancouver, Canada)
 - GBC 2000 (Maastricht, the Netherlands)
 - GBC 2002 (Oslo, Norway)
 - SB2005 (Tokyo, Japan), SB2008 (Melbourne, Australia)







Further Reading



- Building Environmental Assessment Tools:
 Current and Future Roles
 - www.sb05.com/academic/4&5_IssuePaper.pdf
- Green Building Standards and Certification Systems [WBDG]
 - http://www.wbdg.org/resources/gbs.php