MEBS6020 Sustainable Building Design

http://ibse.hk/MEBS6020/



Analysis Methods and Tools (II)



Ir Dr. Sam C. M. Hui
Department of Mechanical Engineering
The University of Hong Kong
E-mail: cmhui@hku.hk

Contents



Life cycle costing

Carbon audit

Zero carbon building

Assess carbon footprints






- *Life cycle cost* is 'cost of an asset, or its parts throughout its life cycle, while fulfilling the performance requirements' (ISO 15686-5)
- Life cycle costing is 'methodology for the systematic economic evaluation of life cycle costs over a period of analysis, as defined in the agreed scope' (ISO 15686-5)
 - It can address a period of analysis which covers the entire life cycle, or selected stage(s) or periods of interest therein

生命周期成本法

Life cycle of an asset (ISO 15686 Buildings and constructed assets - Service life planning)

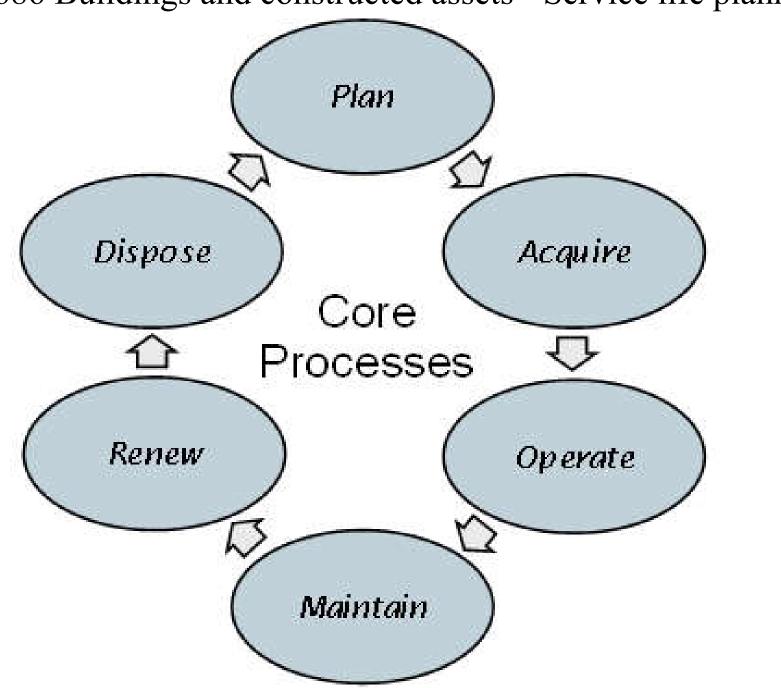


(Source: http://simple.werf.org/simple/media/LCCT/index.html)







- Life-cycle costing (LCC) for buildings
 - Also known as whole life costing (WLC)
 - Analyses the design of building or building systems including initial costs, maintenance costs, repair costs, energy & water costs, and other significant costs over the assumed life of the facility or system (*total cost of ownership*)
 - Combines all <u>costs</u> into net annual amounts, discounts them to <u>present value</u>, and sums them to arrive at total LCC

Why consider life cycle cost?

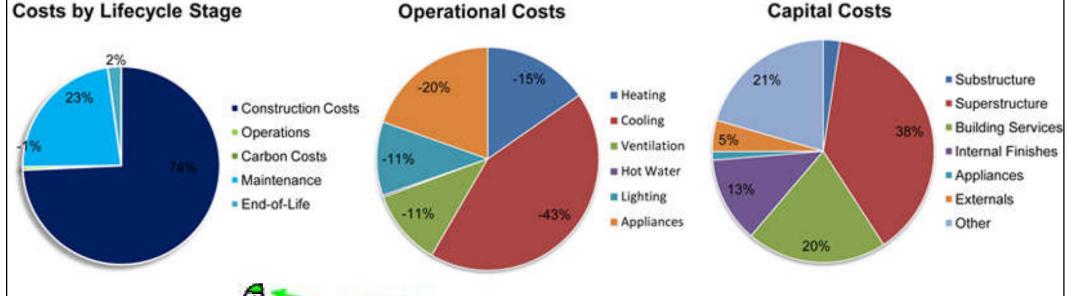

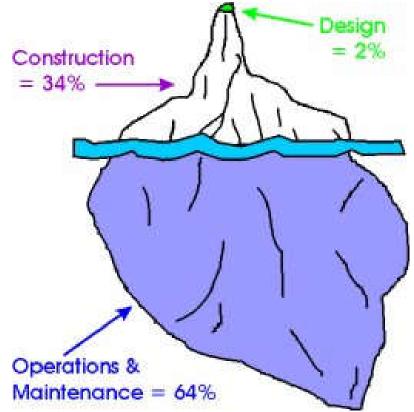

Life cycle cost of electric motor

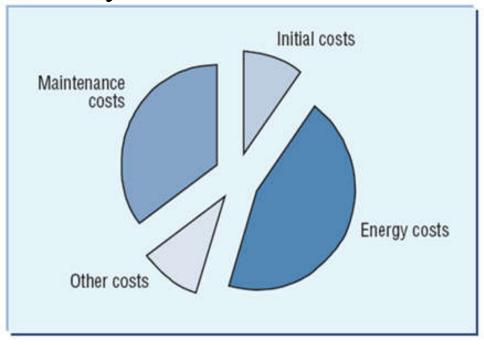


(Video: Life Cycle Costing (4:19) https://youtu.be/24By2bglwys)





- LCC is that it is not the same as life cycle assessment (LCA)
 - The two methodologies are complementary, but LCC focuses on the *dollar \$\$ costs* of building and maintaining a structure over its life cycle, while LCA focuses on *environmental performance*
 - Performance is measured in the units appropriate to each emission type or effect category

Concept of total cost or life cycle cost

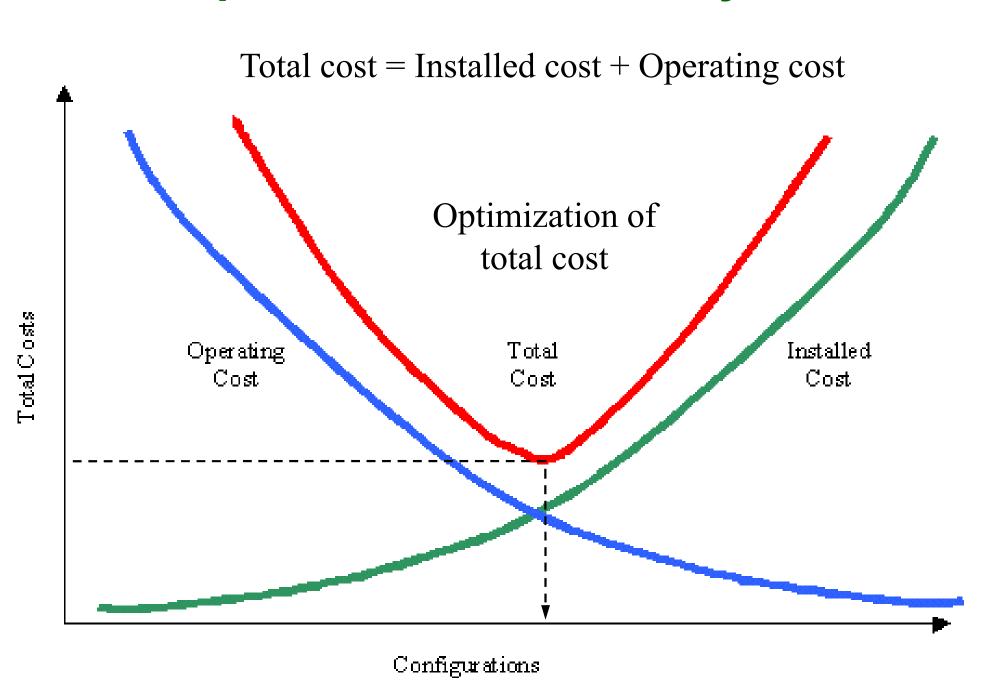





- Basic steps of LCC analysis
 - 1. Gather basic financial data
 - 2. Estimate annual energy costs
 - 3. Estimate first costs
 - 4. Estimate ongoing costs
 - 5. Calculate life-cycle costs
 - 6. Compare life-cycle costs








General life cycle cost (LCC) equations

$$LCC = \sum_{t=0}^{N} \frac{C_t}{(1+d)^t} \qquad PWF = \frac{\left[1 - \frac{1}{(1+d)^N}\right]}{d}$$

- C_t = sum of all relevant costs occurring in year t
- N = number of years in the study period
- d = discount rate used to adjust cash flow to present value
- PWF = present worth factor

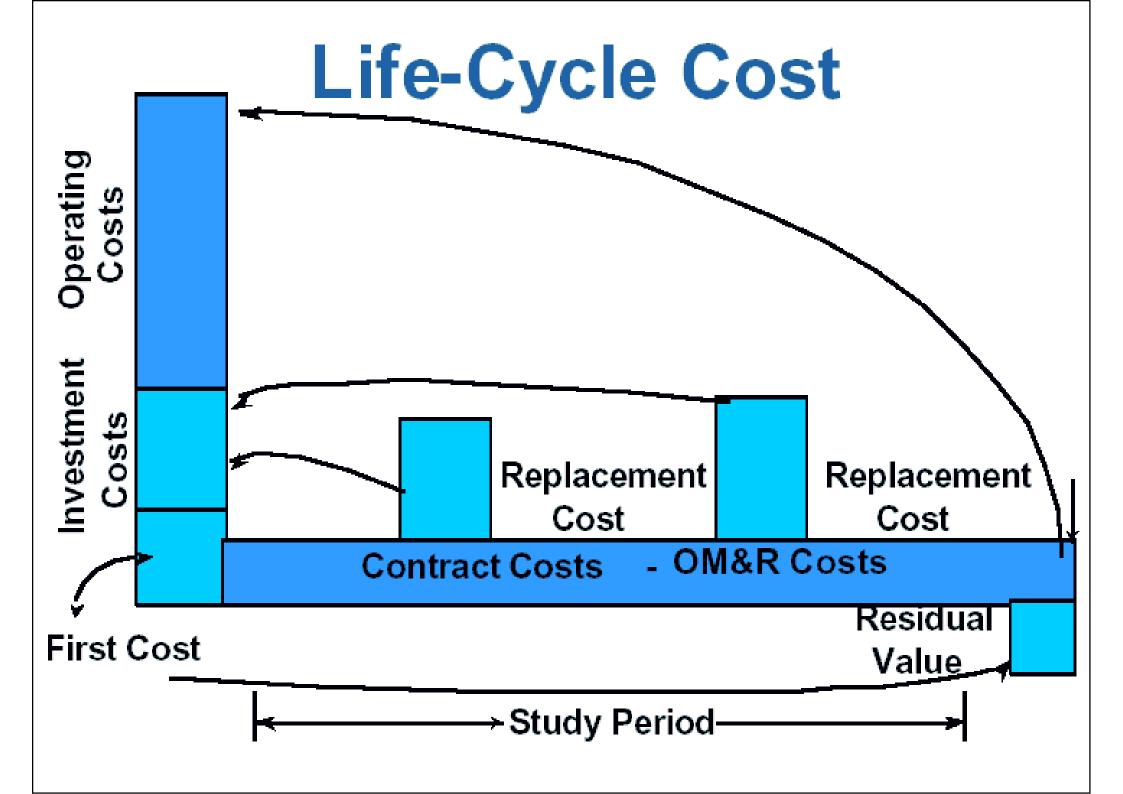

Life cycle costing



- LCC calculation
 - LCC = I + Repl Res + E + W + OM&R + O
 - LCC = Total LCC in present-value (PV) dollars
 - I = PV investment costs
 - Repl = PV capital replacement costs
 - Res = PV residual value less disposal costs
 - E = PV of energy costs
 - W = PV of water costs
 - OM&R = PV of non-fuel operating, maintenance and repair costs
 - O = PV of other costs (e.g. contract costs)

An example of life cycle cost calculation

	Building A	Building B
Construction Year	1950	2010
Useful Life (years)	20	20
Purchase Price (P)	\$35,000,000.00	\$45,000,000.00
Interest (I)	\$49,409,990.87	\$63,527,131.12
Replacement Cost (re)	\$20,500,000.00	\$20,500,000.00
Resale/Salvage Value (Rs)	\$20,000,000.00	\$40,000,000.00
Disposal Cost (D)	\$5,000,000.00	\$0.00
Energy Costs (E)	\$2,450,000.00	\$400,000.00
Water Costs (W)	\$60,000.00	\$32,000.00
Maintenance (M)	\$2,200,000.00	\$750,000.00
Other (O)	\$100,000.00	\$100,000.00
Life Cycle Cost	\$59,720,010.87	\$45,309,151.12

Cost Considerations for Design

Direct and indirect: initial, life cycle, and environmental

Initial:

Construction: supply and installation

Design

Life cycle:

Daily, weekly and annual maintenance including cleaning, repair, redecoration Replacement, including removal, waste disposal, replacement Running cost for energy consuming components

Environmental:


Resource depletion and environmental pollution Extraction, manufacture, transport, use and disposal: to air, ground and water Indoor environmental quality



Life cycle costing

- Typical life-cycle cost analysis include:
 - Acquisition costs (or design & development costs)
 - Financing costs (e.g. interest rate on a loan)
 - Energy savings
 - Equipment replacement costs
 - Operations, maintenance and repair costs
 - Tax implications
 - Impacts of inflation

(Example: Video: Life Cycle Cost Analysis of PV Systems (5:58) https://youtu.be/7rDpYZi6Lk8)

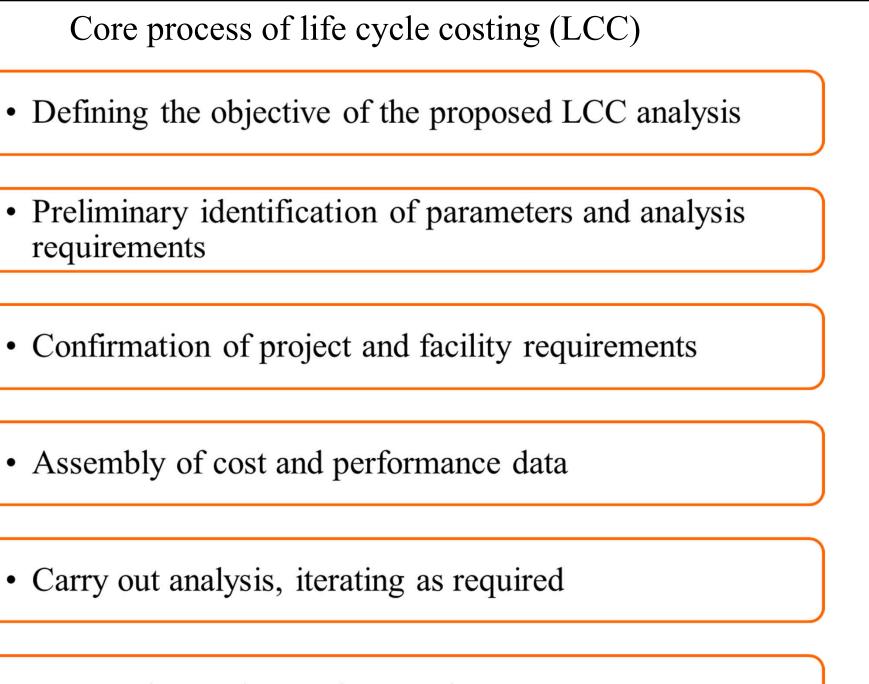


Interpreting and reporting results





- Useful references and tools:
 - ISO 15686-5:2008 Buildings and Constructed Assets. Service Life Planning. Life Cycle Costing https://en.wikipedia.org/wiki/ISO_15686
 - NIST Handbook 135 Life-Cycle Costing Manual, https://www.wbdg.org/FFC/NIST/hdbk_135.pdf
 - Building Life-Cycle Cost (BLCC) software,
 http://www.wbdg.org/tools/blcc.php





- What is a carbon audit? 碳審計
 - It is a means of measuring and recording the green house gas (GHG) emissions of an organization or building within a defined system boundary
 - Sometimes called a 'carbon footprint'
 - Includes:
 - Direct power usage (from fuel-powered sources)
 - Fuel-powered transport (haulage & travel)
 - The wider footprint may include:
 - Waste and recycling, carbon saving arrangements



- Carbon audit is the first step in developing a carbon strategy
- Carbon strategy: A long term action plan to manage and reduce the carbon emissions of the organisation and its clients
- Carbon strategy is compulsory in certain industries (e.g. steel and car manufacturers)

GO,

Replace

Reduce


void



- Why should we do a carbon audit?
 - Some countries has set targets to cut carbon emissions under the Kyoto Protocol
 - Related local legislation
 - Corporate social responsibility policies
 - Employee & customer expectations
 - Brand value & corporate image
 - Carbon reporting provides good management data
 - Savings in energy consumption




Greenhouse gas (GHG) emission trends of Hong Kong 1990-2023

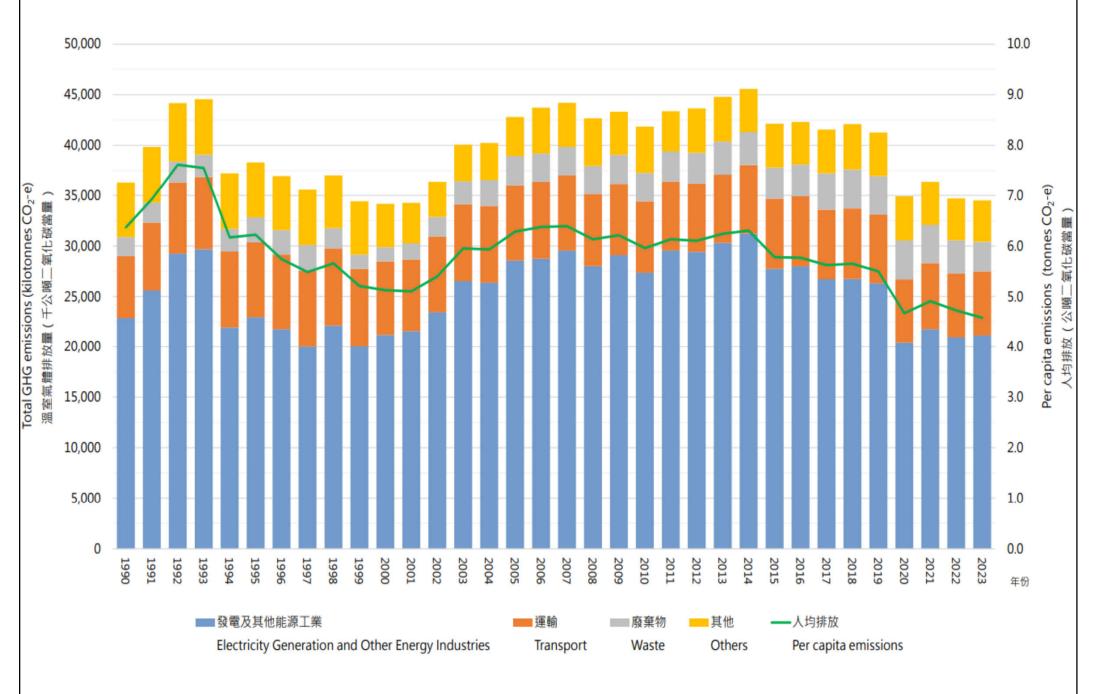

(Source: https://cnsd.gov.hk/en/climate-ready/ghg-emissions-and-trends/)

Greenhouse gas (GHG) emission of Hong Kong 2008

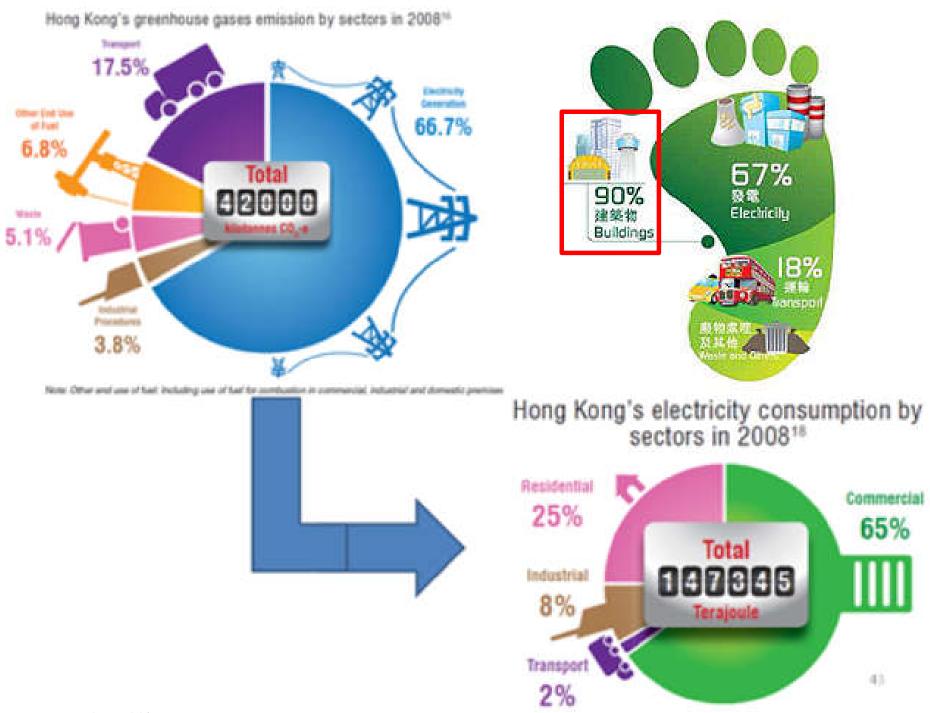

(Source: www.epd.gov.hk)




- EPD and EMSD, 2010. Guidelines to Account for and Report on Greenhouse Gas Emissions and Removals for Buildings (Commercial, Residential or Institutional Purposes) in Hong Kong, 2010 Edition, Environmental Protection Department (EPD) and Electrical and Mechanical Services Department (EMSD), Hong Kong
 - https://www.epd.gov.hk/epd/sites/default/files/epd/english/climate_change/files/Guidelines_English_2010.pdf



- Purpose of the guidelines: Assist the building user and managers to:
 - Measure their greenhouse gas (GHG) performance
 - Identify areas of improvement
 - Conduct voluntary programmes to reduce and/or offset emissions
- Voluntary participation and self-reporting
- Compile the GHG inventory



- Principles to ensure true and fair reporting
 - Relevance
 - Completeness
 - Consistency
 - Accuracy
 - Transparency
- Include 6 types of GHG: CO₂, CH₄, N₂O, hydrofluorocarbons (HFCs), perfluorocarbons (PFCs) and sulphur hexafluoride (SF₆)

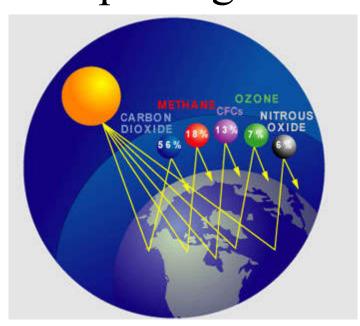




- Typical steps:
 - 1. Determine the physical boundaries (e.g. site boundaries of building)
 - 2. Determine the operational boundaries (identify and classify the activities to determine the scope)
 - 3. Determine the reporting period (e.g. one year)
 - 4. Collect necessary data and information and to quantify the GHG performance
 - 5. Prepare the report



- *Physical boundaries* (e.g. site boundaries)
- Operational boundaries
 - Operational activities which will result in GHG emissions or removals
 - Scope 1 direct emissions and removals
 - Scope 2 energy indirect emissions
 - Scope 3 other indirect emissions (optional)

Carbon audit and scope of greenhouse gas (GHG) emissions

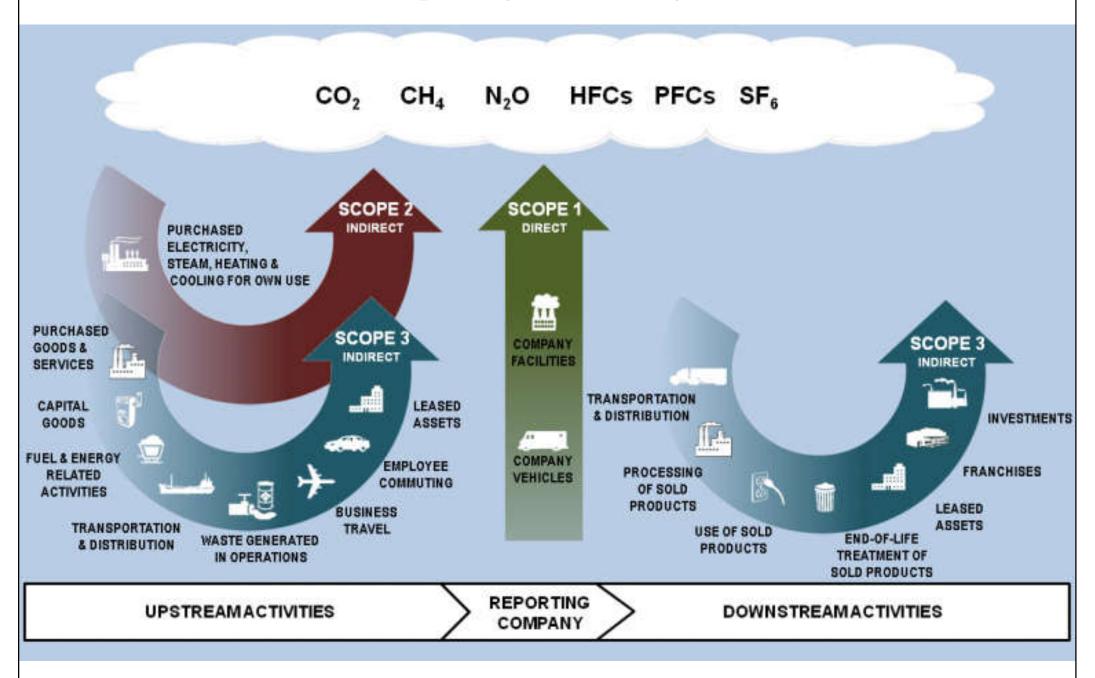

(Source: UNEP Sustainable Buildings and Climate Initiative, https://energies2050.org/sustainable-buildings-and-climate-initiative-unep-sbci/?lang=en)



- Scope 1 direct emissions and removals
 - Combustion of fuels in stationary sources to generate electricity, heat, or steam, e.g. electricity generators, boilers, gas cooking stoves, etc.
 - Combustion of fuels in mobile sources (e.g. motor vehicles and ships), for example, shuttle bus
 - Intentional or unintentional GHG releases from equipment and systems, e.g. HFCs and PFCs from HVAC&R equipment





- Scope 1 direct emissions and removals
 - Assimilation of CO₂ into biomass through e.g. planting of trees
 - Any other physical and chemical processing in the physical boundary which will emit or remove GHG. For example, on-site waste or sewage processing facilities

Emission (CO_2) = Σ Amount of Fuel Consumed x Emission Factor of CO_2

Emission (CH₄/ N_2 O) = Σ Amount of Fuel Consumed x Emission Factor of (CH₄/ N_2 O) x Relative Global Warming Potential



- Scope 2 energy indirect emissions
 - Electricity purchased from power companies
 - Towngas purchased from the Hong Kong and China Gas Company
- Scope 3 other indirect emissions (optional)
 - Methane gas generation at landfill in Hong Kong due to disposal of paper waste
 - GHG emissions due to electricity used for fresh water processing by Water Services Department




- Scope 3 other indirect emissions (optional)
 - GHG emissions due to electricity used for sewage processing by Drainage Services Department
 - Other examples of GHG emissions
 - Extraction & production of purchased materials & fuels
 - Transportation of purchased materials or goods, fuels, products, waste, employees, occupants and guests, to and from the concerned buildings
 - Business travel by employees



- Scope 3 other indirect emissions (optional)
 - Other examples of GHG emissions (cont'd)
 - Emissions from outsourced activities or other contractual arrangements
 - Use of sold products and services
 - Waste disposal other than those covered in the above list
- Links with international emissions reporting framework, e.g. ISO14064-1

The carbon audit methodology

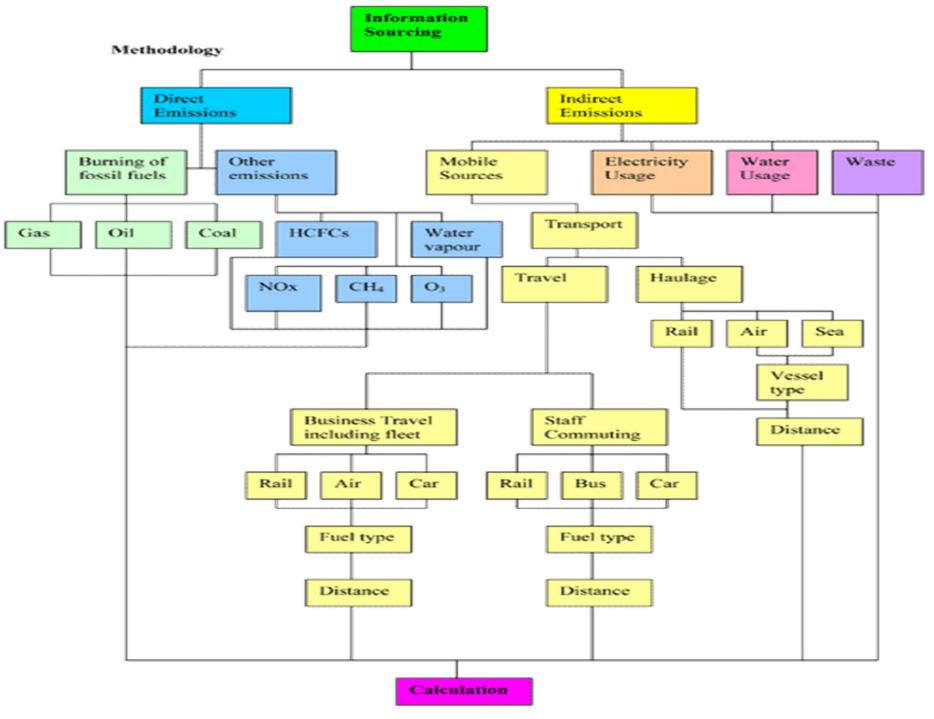

(Source: http://www.carbonmanagers.com/carbon-audit-methodology%20.aspx)



- Implications to sustainable building design
 - Future green building assessment might include the GHG indicators
 - Building projects that aim at "zero energy", "zero carbon" or "zero emission" must demonstrate their compliance by carbon audit
 - Possibility of trading off GHG emission and allow carbon trading





- Zero carbon building (ZCB) 零炭建築
- Zero energy building (ZEB) 零能耗建築
 - A building that produces as much energy on-site as it consumes on an <u>annual</u> basis
 - "Net" zero energy building 淨零能耗建築
- In recent years, many researchers and governments investigated the definitions of ZEB and ZCB to develop an internationally agreed and consistent definition

Terms and definitions of ZEB and ZCB

Terms	Definitions/Meanings
Zero energy building (ZEB) or net zero energy building (NZEB)	A building that produces as much energy on-site as it consumes on an annual basis
Net zero site energy building (site ZEB)	Amount of energy provided by on-site renewable energy sources is equal to the amount of energy used by the building
Net off-site zero energy building (off-site ZEB)	Similar to previous one, but consider purchasing of energy off-site from 100% renewable energy sources
Net zero source/primary energy building (source ZEB)	It produces as much energy as it uses in a year, when accounted for the source. For electricity, only around 35% of the energy used in a fossil fuel power plant is converted to useful electricity and delivered. Site-to-source conversion multipliers are used to calculate a building's total source energy
Net zero energy cost building (cost ZEB)	The cost of purchasing energy is balanced by income from sales of electricity to the grid of electricity generated on-site
Net zero energy emissions building, zero carbon building (ZCB), zero emission building	The carbon emissions generated from the on-site or off-site fossil fuel use are balanced by the amount of on-site renewable energy production

Zero carbon building



SELF-SUFFICIENT!

- Zero energy building (ZEB)
 - A building that produces as much energy on-site as it consumes on an annual basis
 - "Net" zero energy building
- Advantages of ZEB:
 - Reduce energy consumption and costs
 - Reduce carbon emissions
 - Reduce dependence on fossil fuels





- Video: Achieving Net-Zero-Energy Buildings
 - ASHRAE (2:05)
 - http://youtu.be/pQFJr5E7_R0
 - By American Society of Heating, Refrigerating and Air-conditioning Engineers (ASHRAE)



- 1. Building envelope measures
- 2. HVAC, service water heating and lighting measures
- 3. Renewable energy measures





- ZEB is often used in conjunction with ZCB
 - ZEB: reduce the operating energy requirements
 → zero fossil energy
 - ZCB: use renewable and low-carbon energy sources to offset or balance carbon emissions
- Balancing carbon concept for ZCB
 - Two major types of balance:
 - Import/export balance (e.g. for ZCB)
 - Load/generation balance (e.g. for ZEB)



Balancing carbon emissions for zero carbon buildings (ZCB)

Balancing Carbon

Operating energy of building

Embodied carbon in building materials

People, "use" and transportation

On-site renewable and generation

Off-site renewable, generation and supply

Other purchased carbon offsets

Zero
"0"

Sources of difference between definitions of ZCB

- a. The metric of the balance (e.g. primary energy, final energy, carbon emission)
- b. The balancing period (monthly, seasonal, operation year, life cycle)
- c. The type of energy use included in the balance (e.g. HVAC, lighting, appliances)
- d. The type of energy balance (import/export and load/generation)
- e. The accepted renewable energy supply options
- f. The connection to the energy infrastructure (grid connected or standalone)
- g. Other requirements relating to energy efficiency, the indoor climate and building-grid interaction





- Australia has developed a definition for ZCB
 - "A zero carbon building is one that has no net annual Scope 1 and 2 emissions from operation of building incorporated services.
 - Include building envelope, water heater, built-in cooking appliances, fixed lighting, shared infrastructure and installed renewable energy generation
 - ZCB must meet specified standards for energy efficiency and on-site generation
 - Compliance is based on modelling or monitoring of greenhouse gas emissions in kg CO2-e/m²/yr."

Variations of ZCB [adapted from ASBEC (2011)]

Zero carbon occupied building	Include occupant emissions
Zero carbon embodied building	Include embodied emissions
Zero carbon life-cycle building	Include all emission sources in the building life cycle
Autonomous zero carbon building	No grid connection
Carbon positive building	Achieves less than zero emissions

(Source: ASBEC, 2011. *Defining Zero Emission Buildings*, Australian Sustainable Built Environment Council (ASBEC), Sydney, Australia. https://www.asbec.asn.au/research-items/zero-emissions-residential-defining-zero-emission-buildings-review-and-recommendations-report/)

Zero carbon

Zero energy


Zero waste

Zero-carbon transport

Zero-carbon energy

Zero-carbon home


Zero-carbon city



我完全自給自足



Allowable emission reduction options for zero carbon buildings

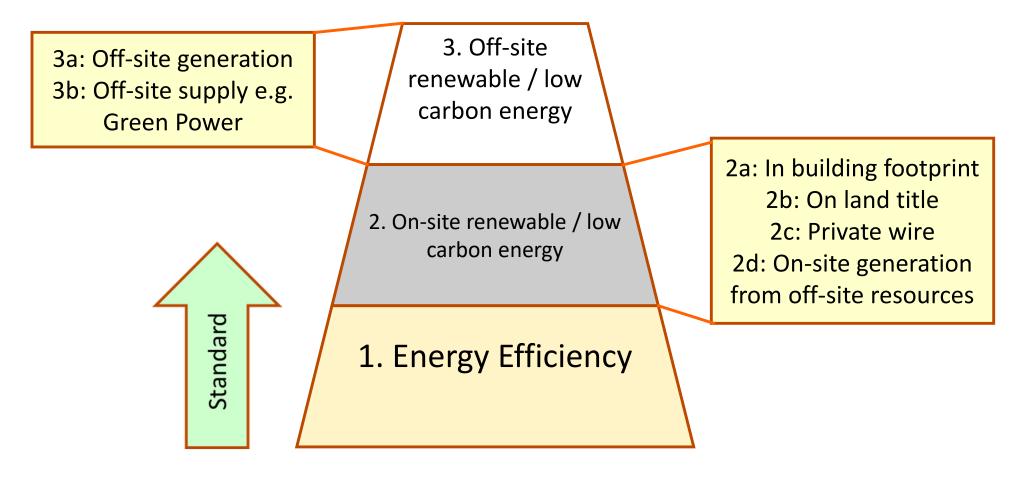

- 'Zero carbon' demands a numerical assessment and validation of the building design
- ZCB compliance requires designers to numerically validate the effectiveness of their approaches

Comparison of low energy, zero energy/carbon and green buildings [adapted from ECEEE (2009)]

	Pros	Cons
Low energy building (LEB) (e.g. passive house)	Cost optimal; well established principles with thousands of buildings constructed	Does not achieve greatest energy/carbon saving potential
Zero energy building (ZEB)/ Zero carbon building (ZCB)	Greatest energy/carbon saving	More expensive; limited practical experience
Green Building (GB)	Takes account of wider sustainability and resource use issues	May not be realistic across all new buildings

(Source: ECEEE, 2009. *Net Zero Energy Buildings: Definitions, Issues and Experience*, European Council for an Energy Efficient Economy (ECEEE), Stockholm, Sweden. https://ec.europa.eu/energy/sites/ener/files/documents/nzeb_full_report.pdf)

Examples of zero energy/carbon building projects in the world



Pearl River Tower, Guangdong, China [2010]



BCA Academy, Singapore [2009]



Self-sufficient solar house, Freiburg, Germany [1992]



Beddington Zero Energy Development (BedZED), London [2002]



Pusat Tenaga Malaysia's ZEO Building, Malaysia [2007]




The Barratt Green House in Watford, UK [2008]

Beddington Zero Energy Development (BedZED), UK



Energy design features:


- Triple glazed
- High thermal insulation
- 777 m² of solar panels
- Co-generation
- District heating & electricity



Wind catcher



Malaysia low energy building and zero energy building

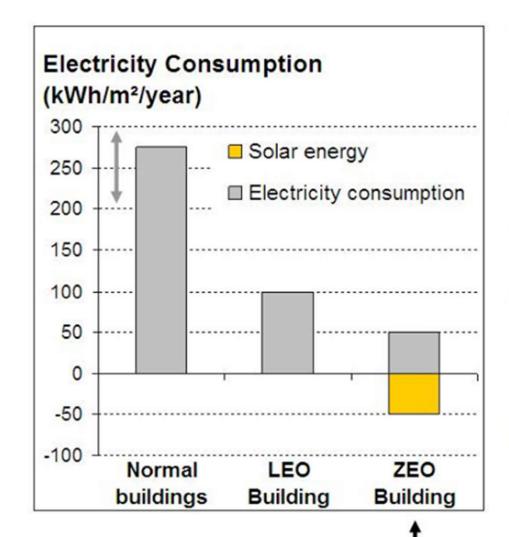

0-energy (Zero Energy Office)







(Source: www.ptm.org.my/PTM Building)

Zero energy office building in Guangdong, China (Pearl River Tower, for Guangdong Tobacco Company)



(completed in 2011)

Main features:

- Orientation of the building
- Low-E-glass
- Double-layer curtain-wall
- Chilled slab concrete ceilings
- Lighting efficiency
- Geothermal heat sink
- Energy storage
- Wind
- Integrated photovoltaics
- Microturbines

(Further info: http://www.som.com/projects/pearl_river_tower__sustainable_design)

(Source: www.sustainabledesignupdate.com)

Zero Carbon Park (ZCP) https://zcp.cic.hk/eng/story-of-zcb




- Hong Kong's first zero carbon building (2013) (3:45) https://youtu.be/pFRx-8xmvbE
- Zeroing in on Green-Building (3:20) https://youtu.be/oiUkoJMhdvw
- 環保基金 綠色建築教育短片系列 綠色建築網上導賞團 (7:23) https://youtu.be/8JkTfb0H9u0






- How to achieve zero energy/carbon building?
 - High energy efficiency
 - On-site carbon reduction measures
 - Such as renewable energy systems, water efficiency
 - Methods to offset the remaining emissions, e.g.
 - Large scale off-site renewable energy facilities (unconnected)
 - Investment in local energy efficiency measures
 - Energy efficient appliances

Strategies for net zero energy building [Source: NSTC (2008)]

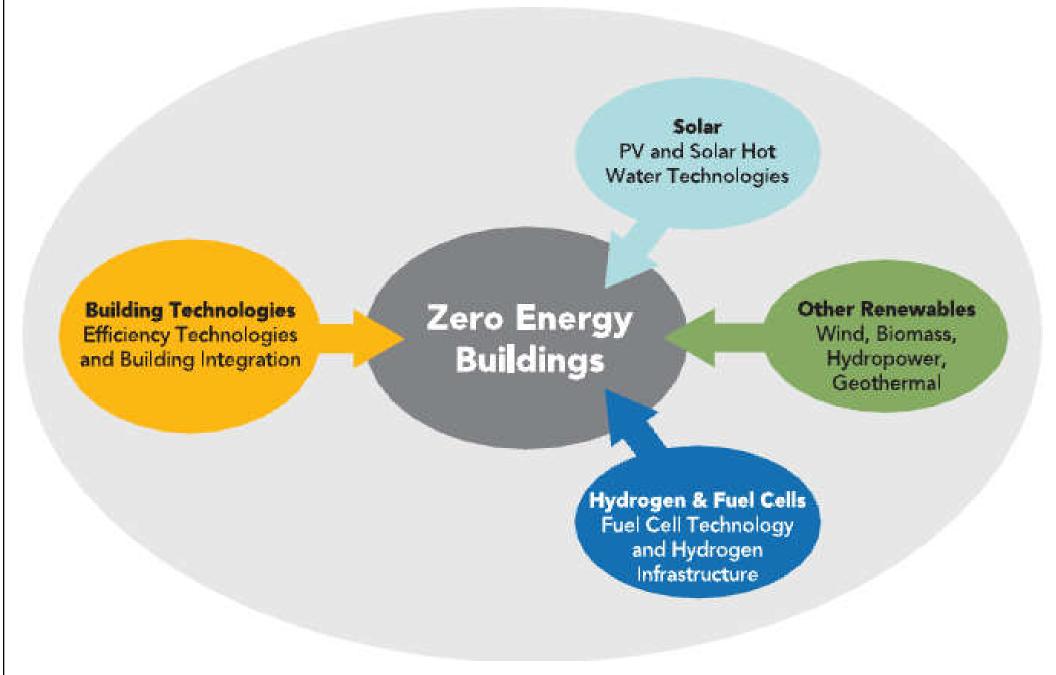



(Source: NSTC, 2008. Federal Research and Development Agenda for Net-Zero Energy, High-Performance Green Buildings, Subcommittee on Buildings Technology Research and Development, Committee on Technology, National Science and Technology Council (NSTC), Washington, DC. https://obamawhitehouse.archives.gov/sites/default/files/microsites/ostp/nstc-netzero-2008.pdf)

Geothermal heat pumps

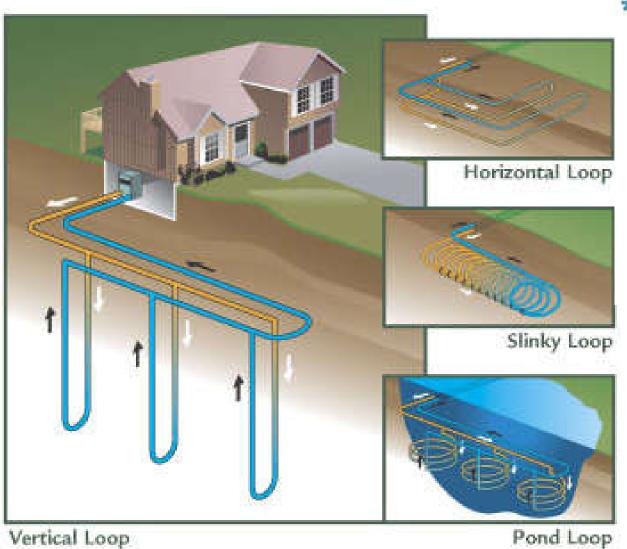




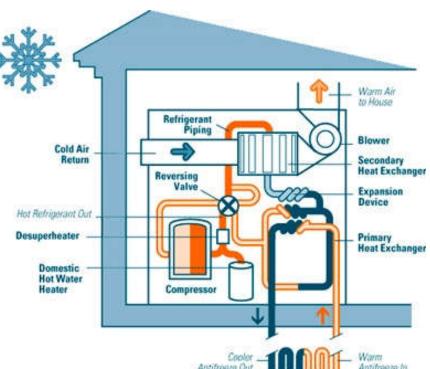

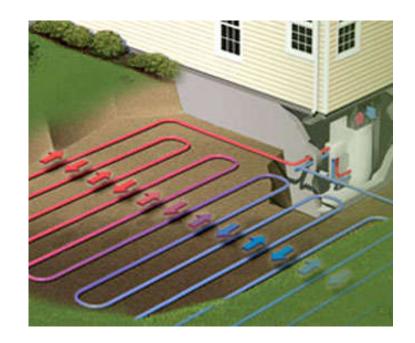


Fuel cell technology

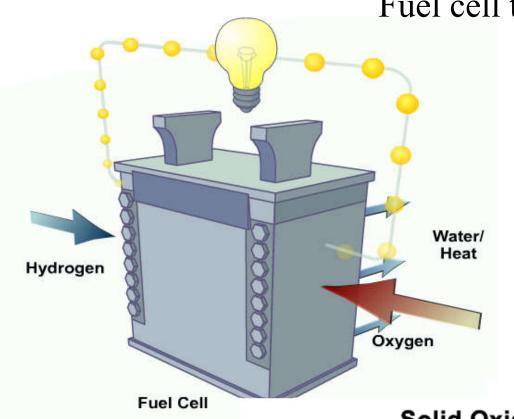




Solid Oxide Fuel Cell

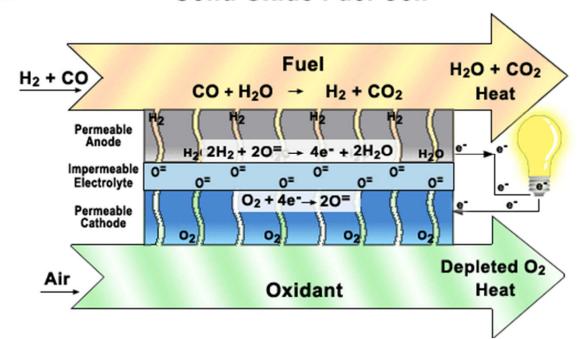

Steps towards a low carbon future

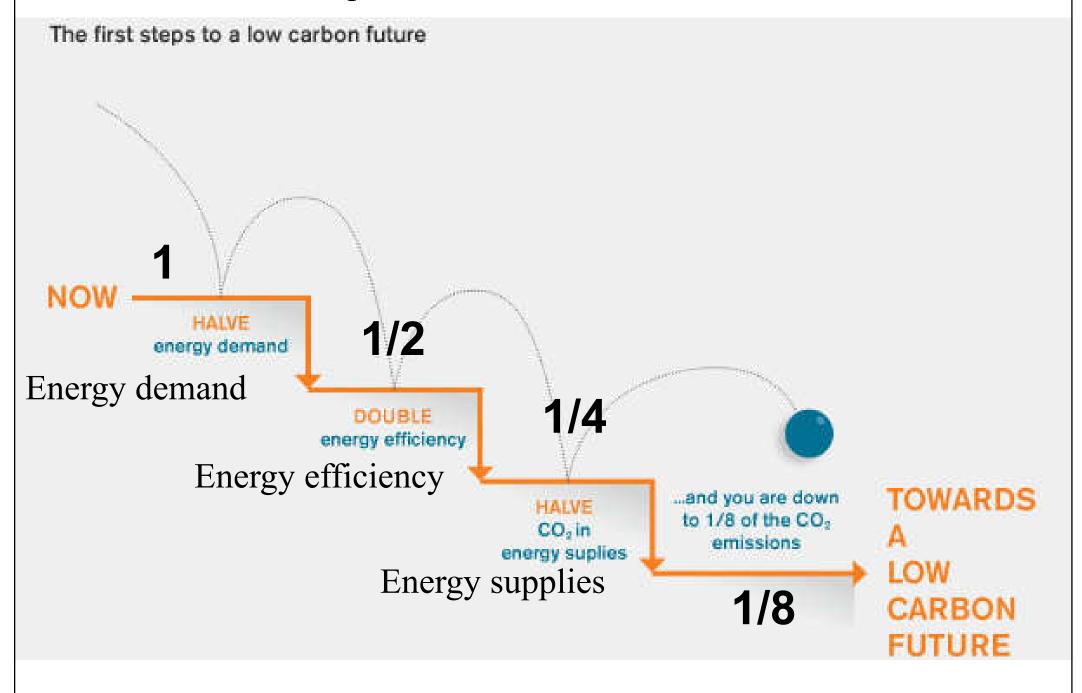

(Source: www.cabe.org.uk/buildings)

Energy reduction action plan



(Source: www.cabe.org.uk/buildings)




Zero carbon building

- How to achieve net zero carbon building?
 - 1. Establish net zero carbon scope
 - 2. Reduce construction impacts
 - 3. Reduce operational energy & carbon impacts
 - 4. Increase renewable energy supply
 - 5. Carbon offset the remainder of emissions
- As a rough rule of thumb:
 - "The embodied carbon of most buildings will fall in the range 400-1,000 kg CO₂e per m²"


(Source: https://circularecology.com/net-zero-carbon-buildings.html)

Total whole life carbon emissions breakdown for different building types

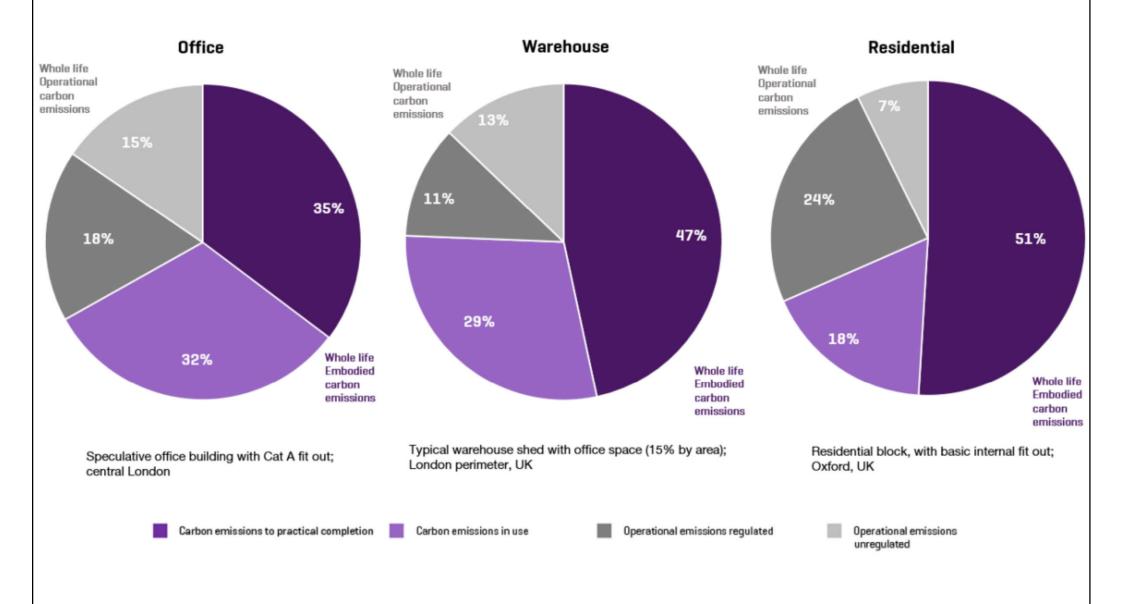


(Source: RICS Whole Life Carbon Assessment for the Built Environment https://www.rics.org/globalassets/rics-website/media/news/whole-life-carbon-assessment-for-the-built-environment-november-2017.pdf)

What is a net zero carbon building?

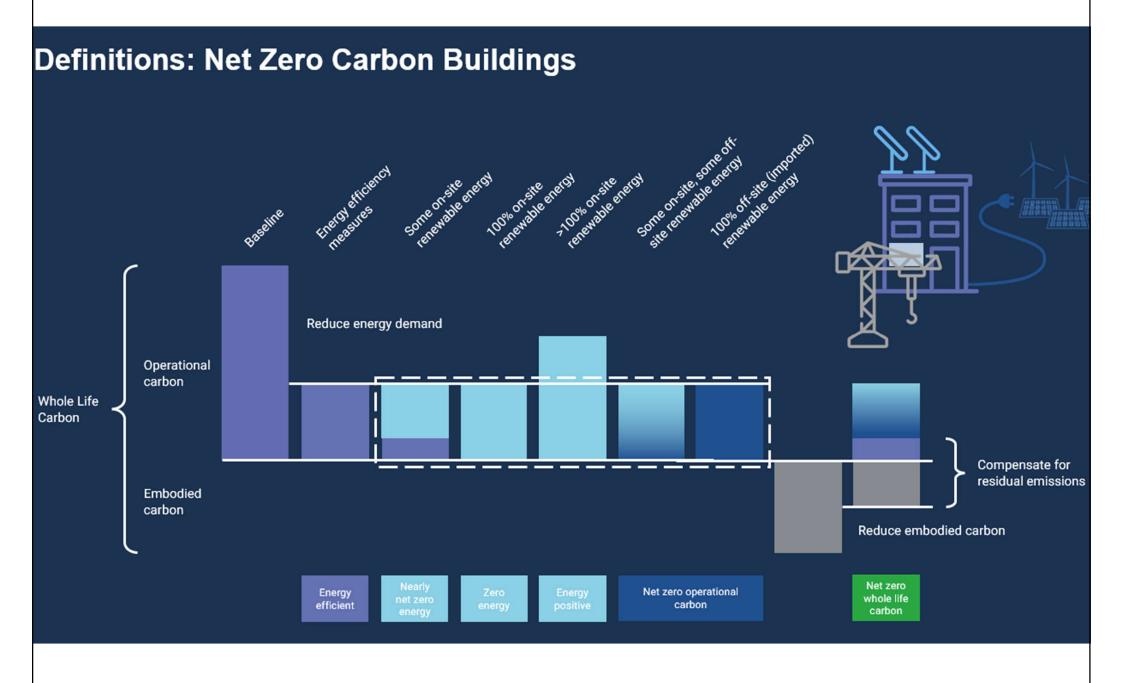

(Source: https://worldgbc.org/advancing-net-zero/what-is-a-net-zero-carbon-building/)

Whole Life Carbon Vision

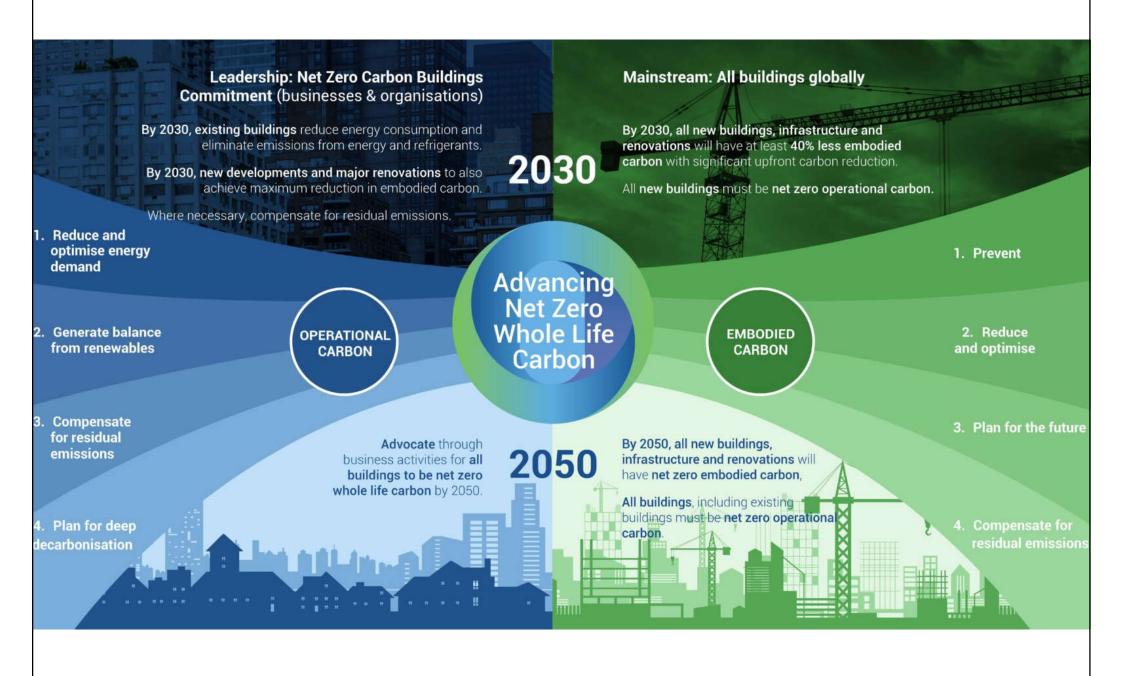

(Source: https://worldgbc.org/advancing-net-zero/whole-life-carbon-vision/)



Assess carbon footprints

- Carbon is frequently used as shorthand for either carbon dioxide (CO₂) or carbon dioxide equivalents (CO₂-e) of greenhouse gases
 - Used as an indicator for environmental impact or sustainability level

Carbon footprint

• Measure the exclusive direct (on-site, internal), and indirect (off-site, external, embodied, upstream, and downstream) CO₂ emissions of an activity, or over the life cycle of a product, measured in kg

Carbon footprint of a building and its components



Materials transport

Demolition wastes transport

Demolition wastes treatment



Building construction

Building operation

Building renovation

De-construction

Electricity consumption

On-site fuel consumption

On-site waste water treatment

On-site solid wastes treatment


Industrial processes housed in the building




Assess carbon footprints

- International standards for carbon footprint calculation and analysis
 - ISO 14040: Life Cycle Assessment Principles and Framework
 - BSI: PAS 2050 Specification for the Assessment of Life-Cycle GHG Emissions of Goods/Services
 - WRI/WBCSD: Greenhouse Gas Protocol
 - IPCC: 2006 Guidelines for National Greenhouse Gas Inventories

Life cycle stages and modules according to EN 15978 and the estimated (according to the Institution of Structural Engineers) distribution of emissions for a medium-scale residential building

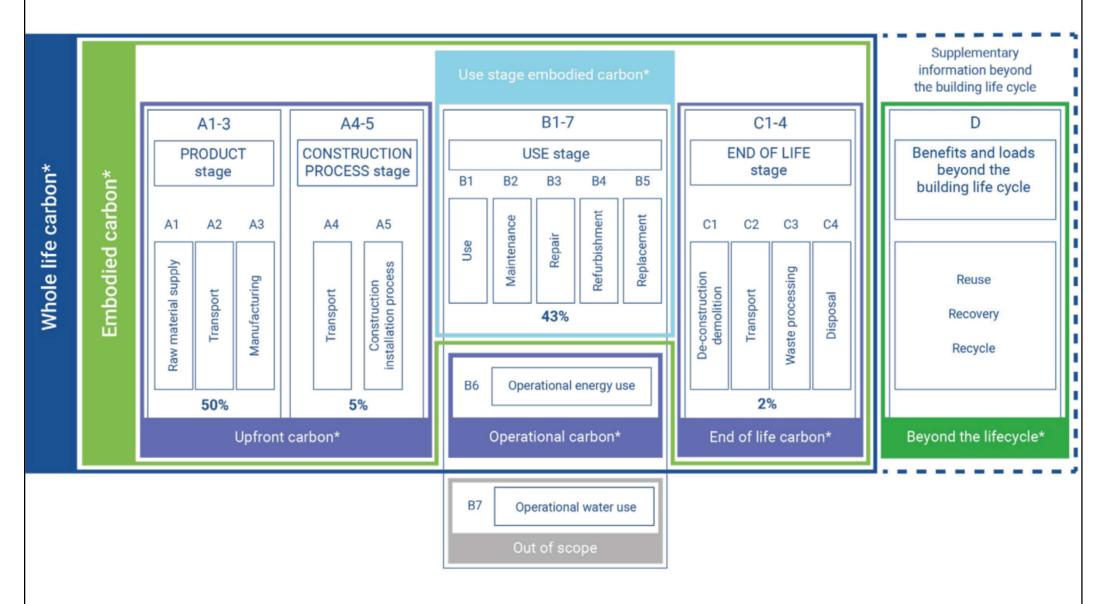

The sustainability of construction works

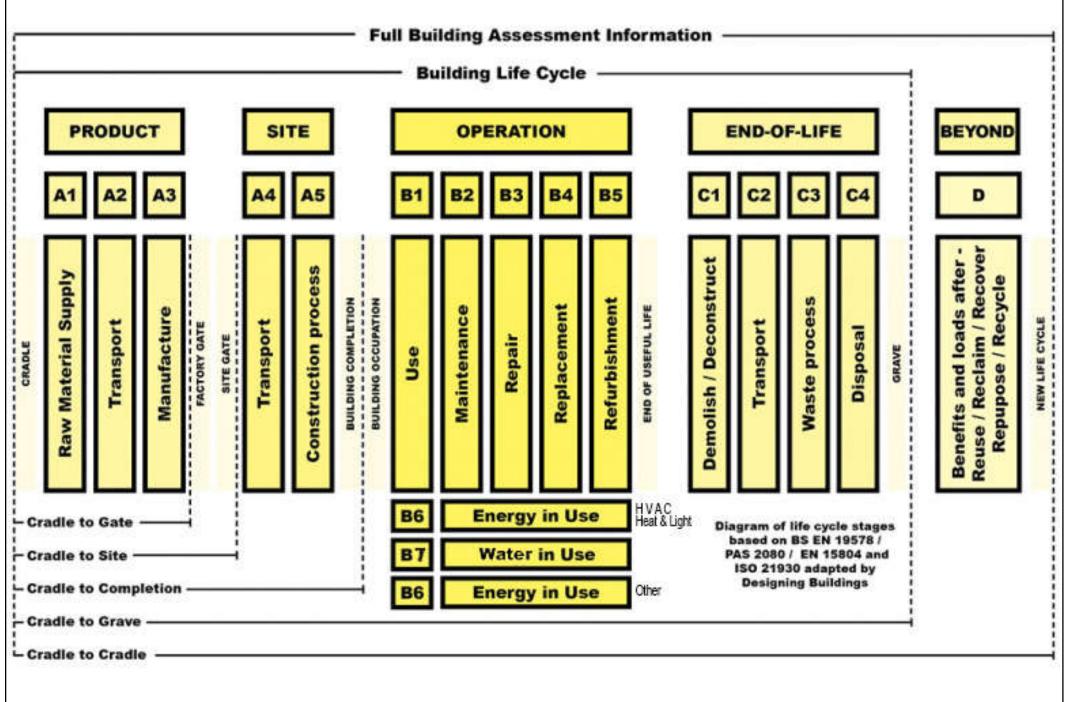

(Source: https://www.designingbuildings.co.uk/wiki/The sustainability of construction works)



Assess carbon footprints

Embodied carbon

 Carbon emissions associated with materials and construction processes throughout the whole lifecycle of a building or infrastructure


Operational carbon

• The emissions associated with energy used to operate the building or in the operation of infrastructure


Whole life carbon

Emissions from all lifecycle phases

Approach to reduce operational carbon and embodied carbon

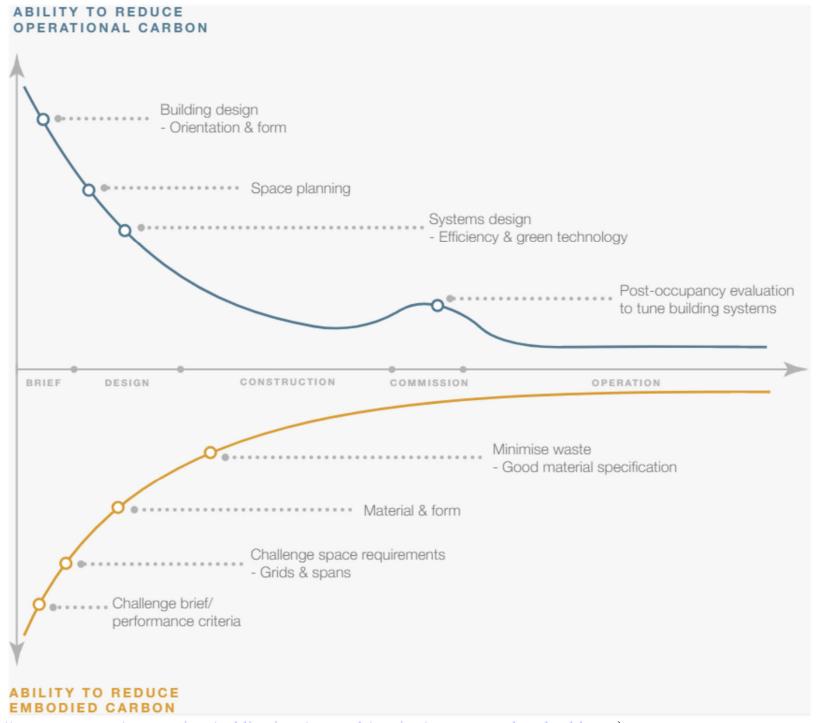

(Source: https://www.arup.com/perspectives/publications/research/section/net-zero-carbon-healthcare)

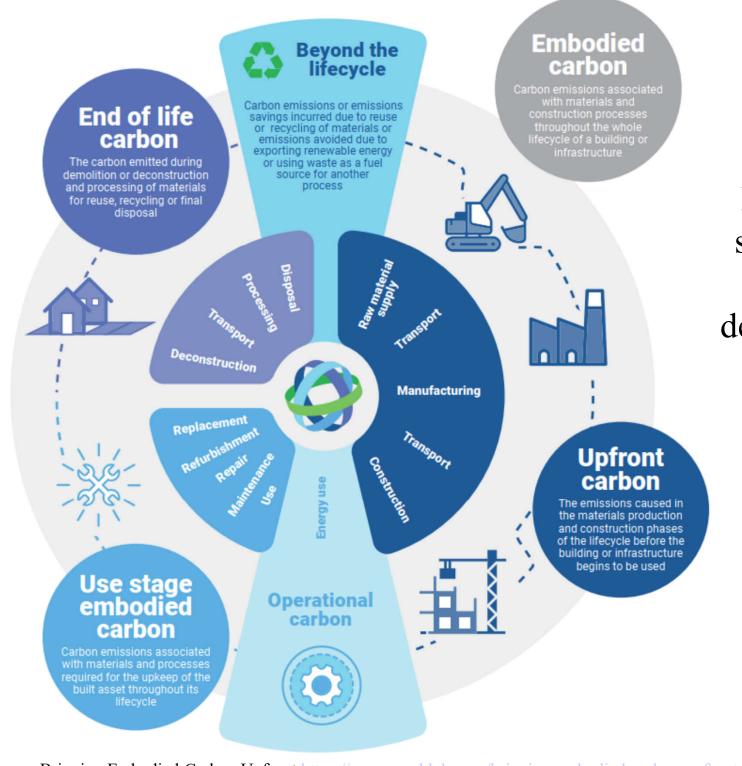

Project lifecycle showing both the scope of the definition and need for whole life consideration

Different carbon reduction approaches

Strictly zero carbon	No carbon is emitted within Scopes 1 and 2; neither balancing nor offsets are allowed.
Net zero carbon	All carbon emissions within emissions Scope 1 are eliminated, and emissions within Scope 2 are balanced through export of low or zero carbon goods, internal or external sequestration, or import substitution of Scope 3 emissions.
Carbon neutral	Any and all emissions for which the building is responsible under Scopes 1 and 2 can be managed through the purchase of offsets from third parties that lie outside the building's boundaries.
Low carbon	Emissions under Scopes 1, 2 and 3 are reduced compared to a baseline. The reduction level is often not clearly specified.

Carbon Reduction: The Tier Approach

...and the Mechanical Systems won't be small enough to be powered by renewable energy

...or the Passive Systems won't work

Basic building design MUST be climate responsive

TIER 3 leat Pump (Geoexchange) - Furnace - Boiler - Spot MECHANICAL Electrical Heating - Active Solar Space Heating* EQUIPMENT Heat Pump - Air Coditioners - Evaporative Coolers Fans (Whole House, Ceiling, Spot) Task Ambient Lighting Fixtures - High Intensity Discharge - Fluorescent otovoltaics* - Wind Turbines - Active Solar Domestic Hot Water* - Active Solar Swimming Pool Water TIER 2 PASSIVE SYSTEMS Heating: Direct Gain* - Trombe Wall* - Sunspace* Cooling: Comfort Ventilation - Night Flush Cooling -Natural Energies **Earth Coupling - Cooling Tower** Daylighting: Light Shelves* - Clerestories* BASIC BUILDING Location* - Site Design* - Landscaping* - Form* -Orientation* - Color* - Insulation - Exterior Shading* -**Construction Materials - Air Tightness** Heat Retention Heat Rejection Windows: Orientation*, Size*, Glazing Type*, Heat Avoidance Insulation, Shading* **Efficient Lighting - Efficient Appliances**

THE 3 TIER APPROACH TO SUSTAINABLE HEATING, COOLING, AND LIGHTING OF BUILDINGS

* PART OF SOLAR RESPONSIVE DESIGN

Irawn by Barbara Jo Agnew at Auburn University


(Image: Norbert Lechner, "Heating, Cooling, Lighting")

How to achieve Zero Carbon Buildings (ZCBs)?

Energy efficiency Renewable energy **BEFORE On-site renewable energy** Off-site renewable energy **BEFORE** Renewable energy **Carbon offset BEFORE Carbon reduction Carbon offset BEFORE**

(Source: https://wrirosscities.org/ZeroCarbonBuildings)

Route to Net Zero: Getting the Sequencing Right

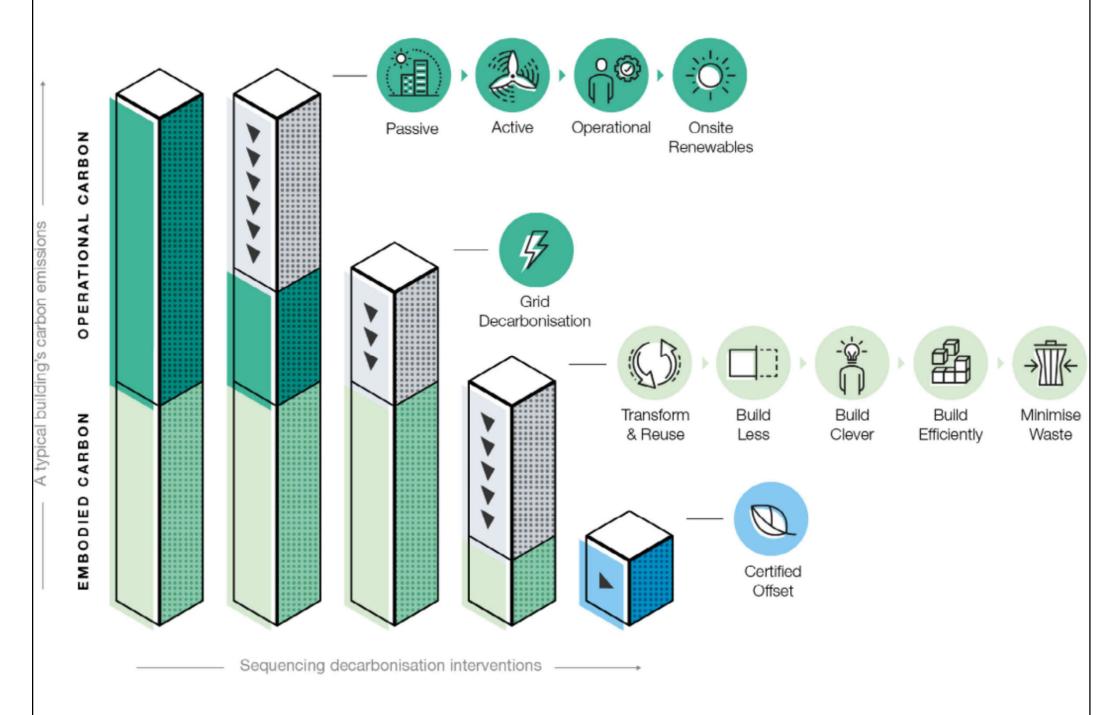

(Source: https://www.arup.com/-/media/arup/files/publications/n/net-zero-carbon-buildings-three-steps-to-take-now.pdf)

Recommended design strategies for ZCB

- At the outset, the building project should take into account building energy efficiency and use of renewable energy
- Select the appropriate building site; allow opportunity to apply renewable energy and to reduce transportation and food production needs
- Optimise passive design strategies to protect the natural and comfortable environment in order to reduce energy demand
- Conserve water and reduce the demand for hot water
- Appropriately select materials in order to reduce the environmental impacts
- Reduce energy use in all aspects of the building operation
- Consider building energy efficiency first before introducing renewable energy offsets

Measures to reduce embodied carbon at each project stage

CONSTRUCTION AND

CONCEPT DESIGN → DETAILED DESIGN → PROCUREMENT

Life cycle carbon / embodied carbon targetsetting

Screening-level embodied carbon assessment to identify hotspots

Design optimization (site topography, building size and efficiency)

Demonstrate meeting embodied carbon targets with updated quantities

Low carbon procurement (low-carbon concrete solutions)

Materials efficiency optimization

Use updated quantities and specifications to update the carbon target

Design optimization (design for disassembly, minimize and recycle construction and demolition waste)

Require Environmental Product Declarations (EPDs) for key products

Identify overlap with certifications and regulatory requirements

Create baseline model to identify hotspots

Compare design and material alternatives

Incorporate low carbon specifications

Review the suppliers EPDs

Engage with suppliers to collect EPDs and update LCA model

(Source: https://oneclicklca.drift.click/building-lca-ebook)

Six-step approach to cost-effective zero net energy+carbon design

1. Load reduction

Reduce building energy demands through passive strategies. Example measure: improved insulation

4. Energy recovery

Supply energy by recovering energy from existing energy losses. Example measure: wastewater heat recovery system

2. Passive strategies

Implement passive design measures that harness environmental conditions to meet building loads. Example measure: natural ventilation

5. Renewables

Supply demands of energy consumption with renewable energy generation.

Example measure: solar thermal panels

3. Efficient systems

Reduce energy losses by increasing energy efficiency of active systems (ie, systems that use energy). Example measure: heat pump with a high coefficient of performance

6. Offsets

Offset remainder of the energy budget if necessary. Example measure: energy efficiency project investment

(Source: https://www.arup.com/perspectives/publications/promotional-materials/section/five-minute-guide-to-net-zero-energy-in-buildings)

Further Reading



- Life-Cycle Cost Analysis (LCCA) [WBDG]
 https://www.wbdg.org/resources/life-cycle-cost-analysis-lcca
- Carbon Footprint Management Toolkit for Sustainable Low-Carbon Living (CityU) http://www.cityu.edu.hk/aerc/cft/
- Arup, 2019. Five Minute Guide to Zero Net Energy and Carbon, Arup, London.

https://www.arup.com/perspectives/publications/promotional-materials/section/five-minute-guide-to-net-zero-energy-in-buildings