


Lighting: Basic Concepts



Ir. Dr. Sam C. M. Hui


Faculty of Science and Technology


E-mail: cmhui@vtc.edu.hk

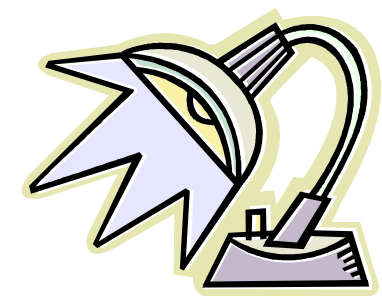

What is Light


- What is *Light*?
 - Light is a form of electromagnetic radiation and is a major medium through which we discover the world around us

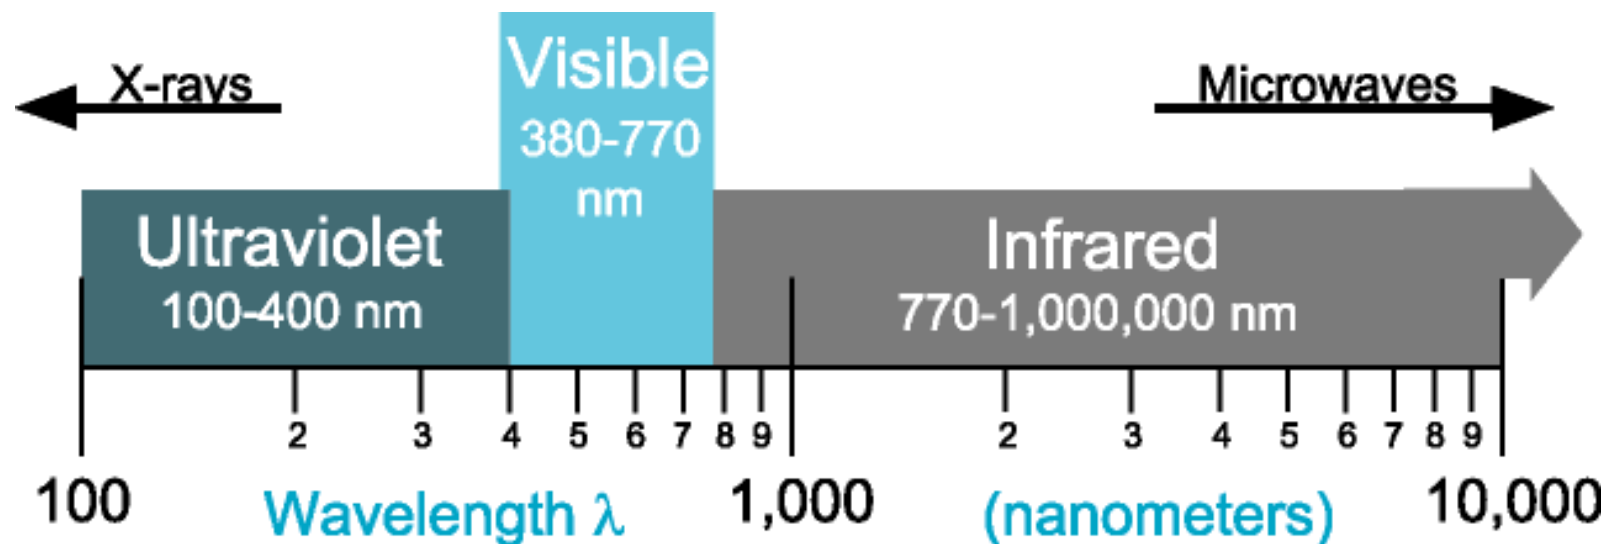

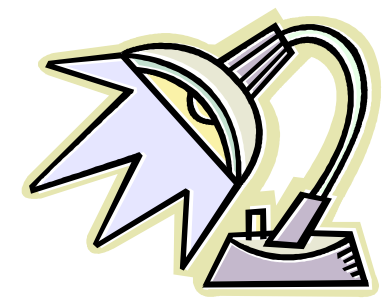





What is Light


- Electromagnetic spectrum
 - Visible light (380 to 760 nm)
 - Mr. ROY G. BIV (Red, Orange, Yellow, Green, Blue, Indigo, Violet)

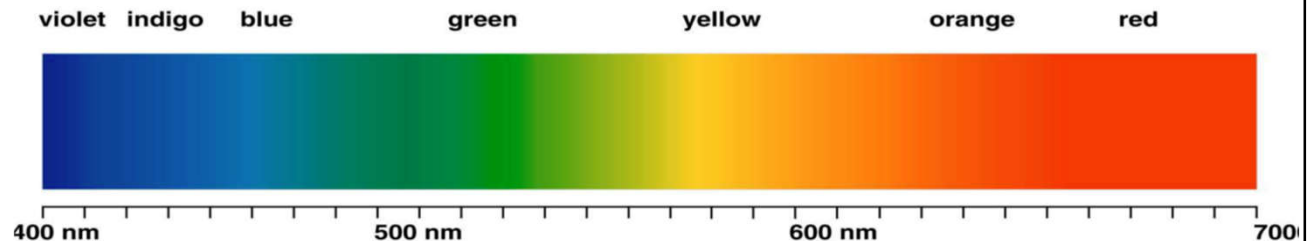

- Ultraviolet (100 to 380 nm)
- Infrared (760 to 1,000,000 nm)
- Speed of light (in air) = 299 702 547 m/s
 - = (wavelength, metres) x (frequency, Hertz)

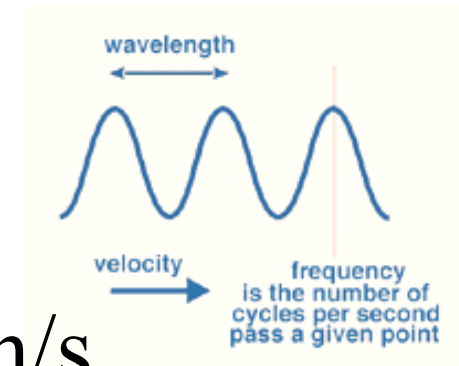

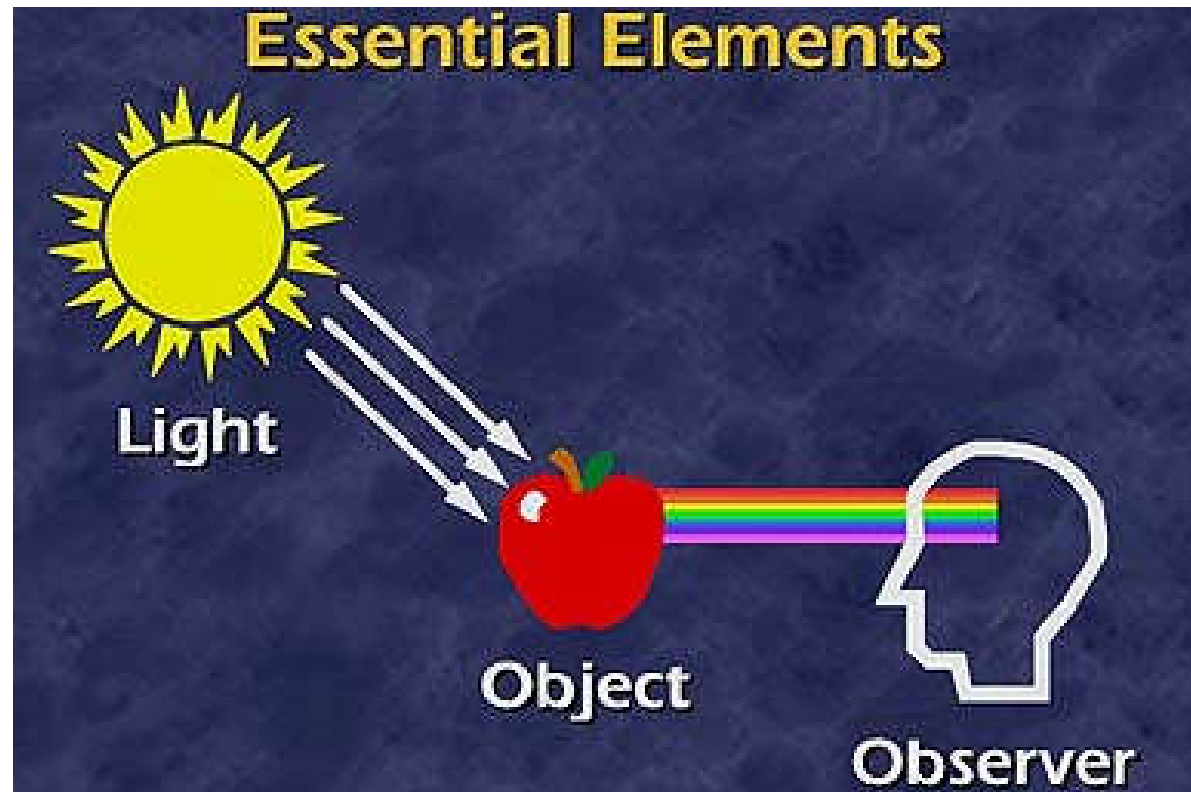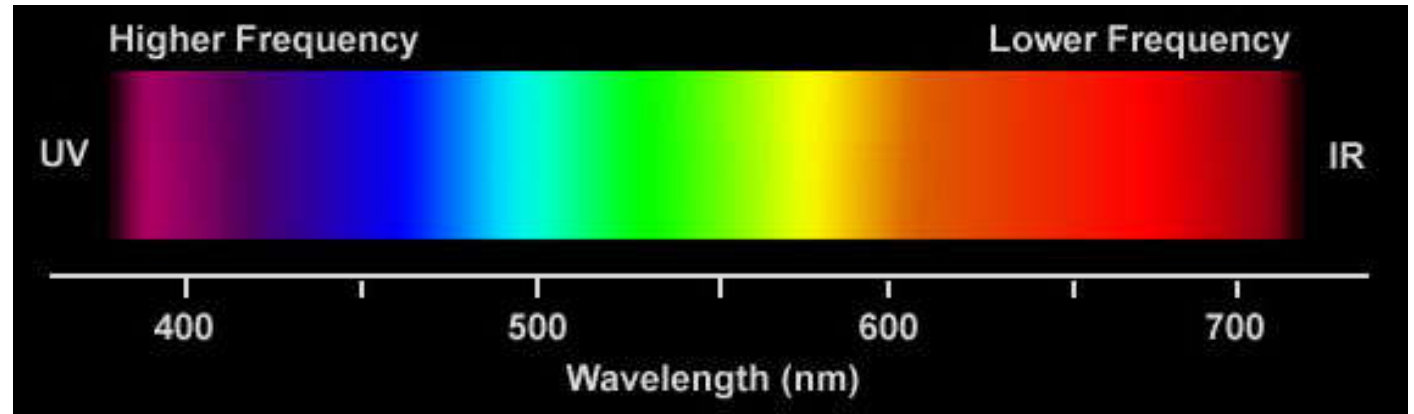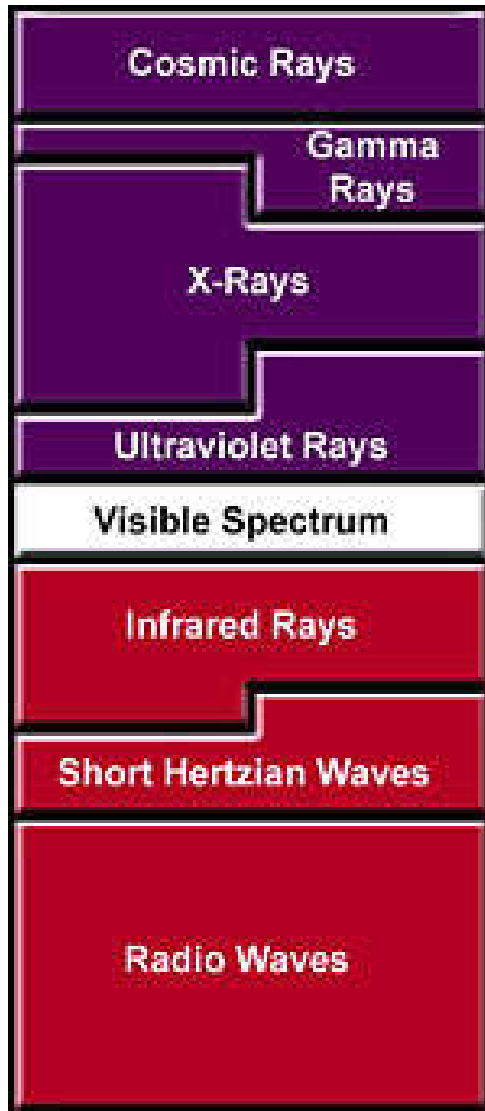


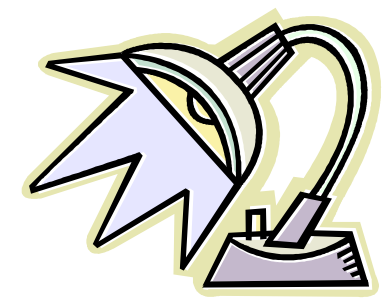


What is Light

- The behaviour of light
 - Inverse square law $E = I / d^2$
 - Cosine law - the irradiance falling on any surface varies with the cosine of the incident angle
 - $E_{\theta} = E \cos \theta = (I / d^2) \cos \theta$
 - Optical properties
 - Reflection (specular, diffuse, spread, mixed, scattered)
 - Transmission and absorption
 - Refraction
 - Diffraction
 - Scattering and polarization

Inverse square law

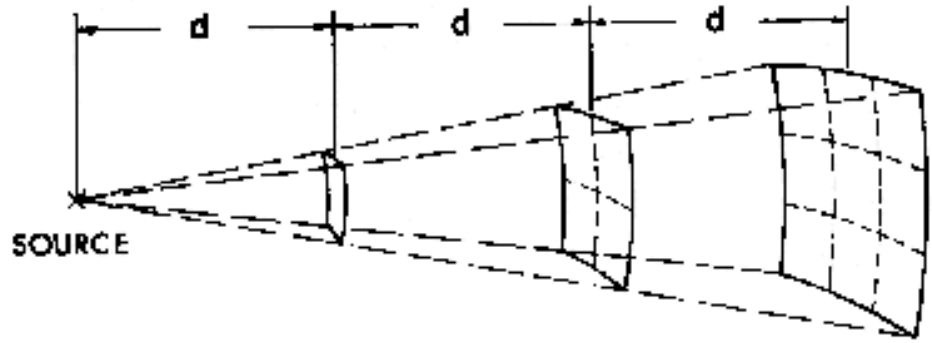


Cosine law

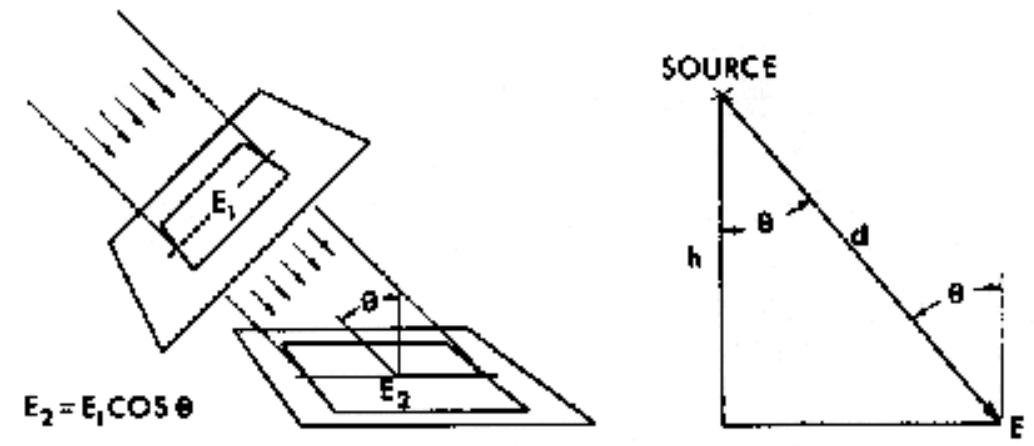


TYPES OF LIGHT MODIFICATION


TRANSMISSION
(Diffuser)
Opal Glass
or Plastic




ABSORPTION
Matte Black
Paint



REFRACTION
Clear Glass




POLARIZATION

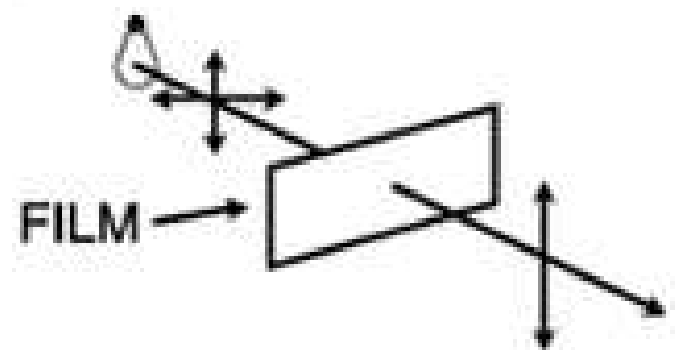


REFLECTION
Polished
Metal



Human Eye




- The camera and the eye
- Structure of human eye
 - 1. Optical elements
 - 2. The retina
 - 3. Photoreceptors

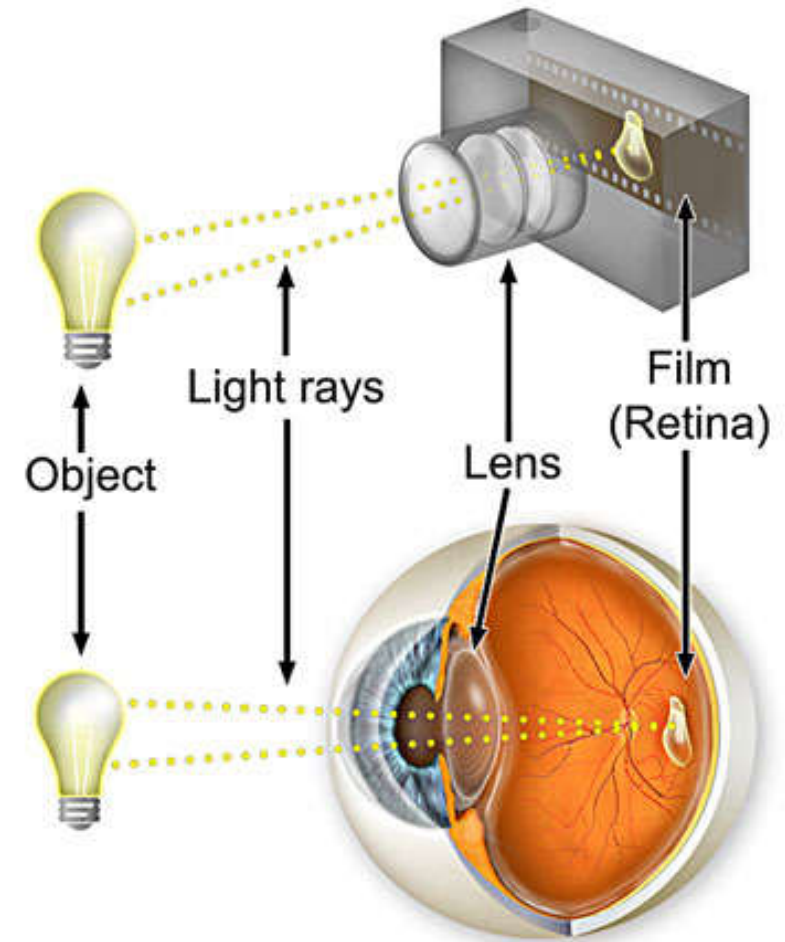

(Video: A Journey Through the Human Eye: How We See (YouTube 2:39),
<http://www.youtube.com/watch?v=gvozcv8pS3c>)


Human Eye



- 1. Optical elements

- Cornea 角膜 – first “lens”, 70% of optical power
- Sclera 鞏膜 – whites of the eye
- Aqueous humour – liquid between cornea & iris
- Iris 虹膜 – coloured muscular ring around pupil
- Pupil 瞳孔 – hole into which light enters eye
- Crystalline lens – 2nd lens, 30% of optical power
- Vitreous humour – fluid filling the eye


(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/eye.html>
and http://en.wikipedia.org/wiki/Human_eye)

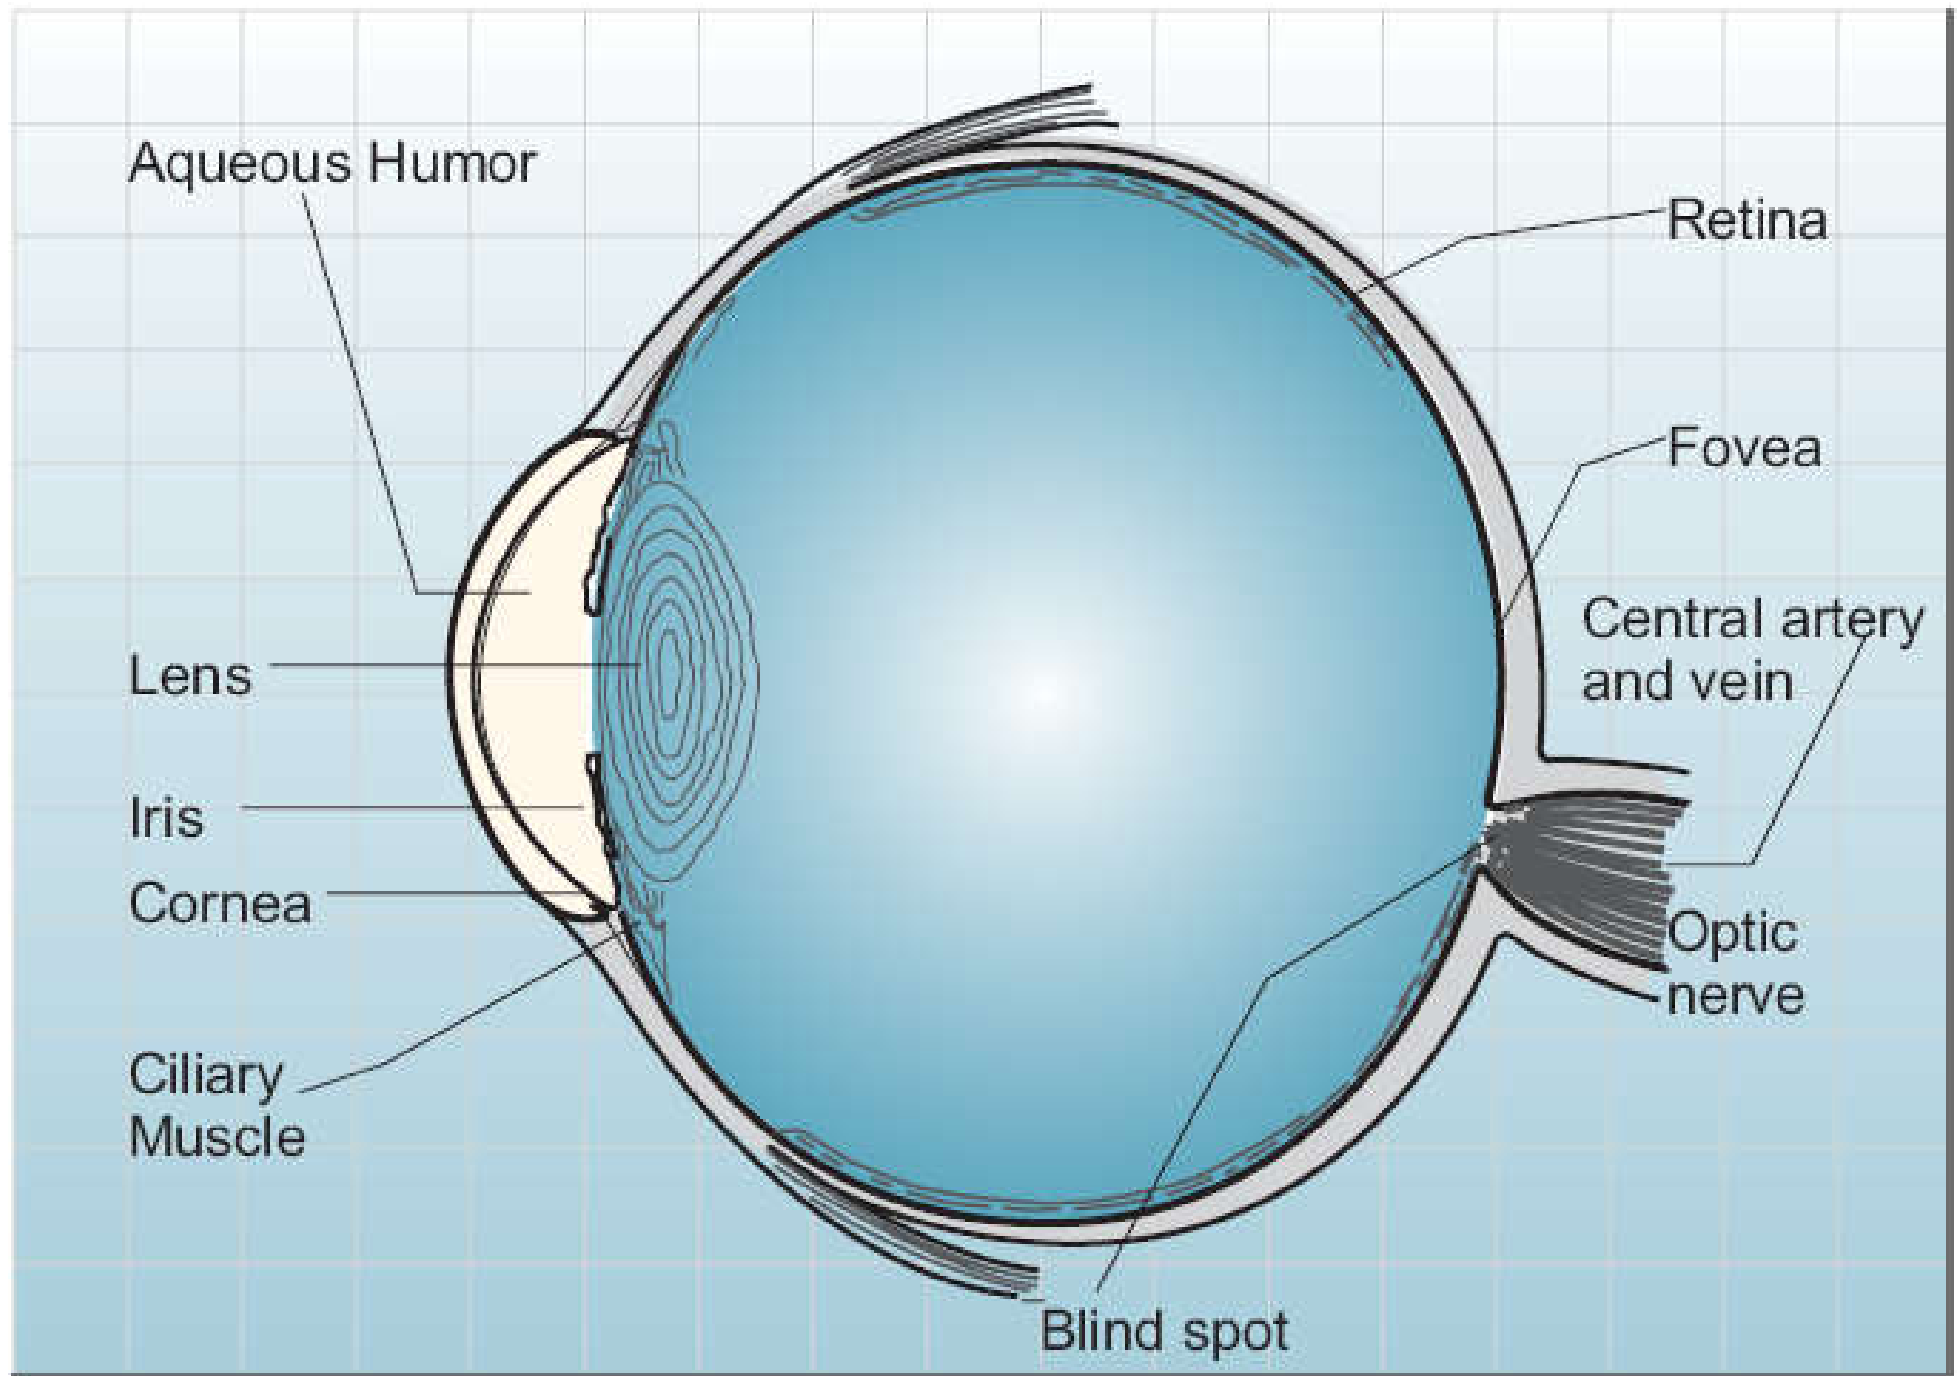


The Human Eye




(Source: Advanced Lighting Guidelines 2001, adapted from IESNA Lighting Handbook, 9th ed.)

Human Eye




- 2. The retina 視網膜
 - Photoreceptors
 - Fovea – highly concentrated 2 degree field allowing colour and fine detail vision
 - Optic disk – “blind spot” pathway to end of the optic nerve (deficient in receptors)
- 3. Photoreceptors
 - Rods – 120 millions per eye
 - Cones – 8 millions per eye

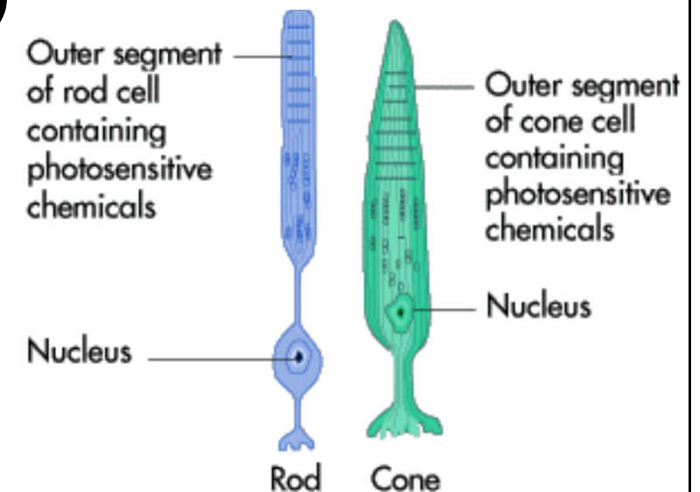

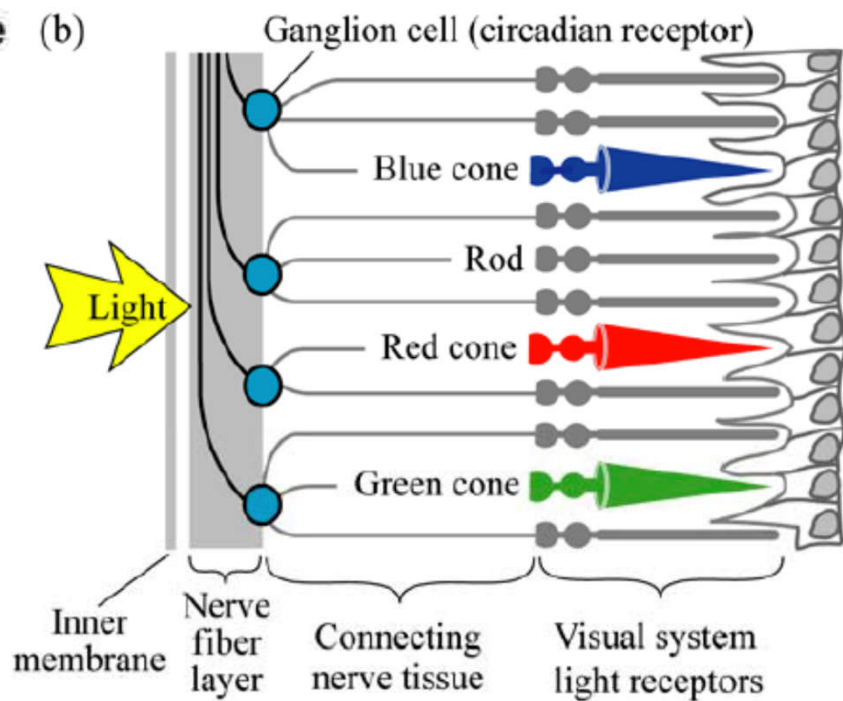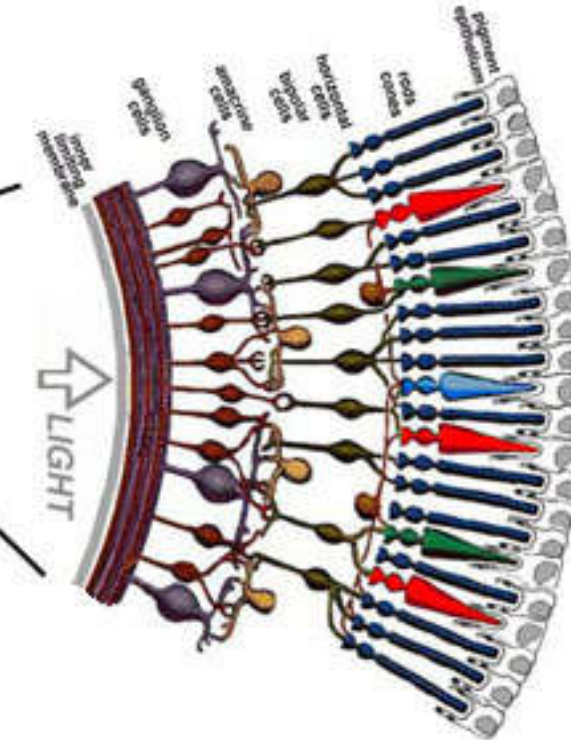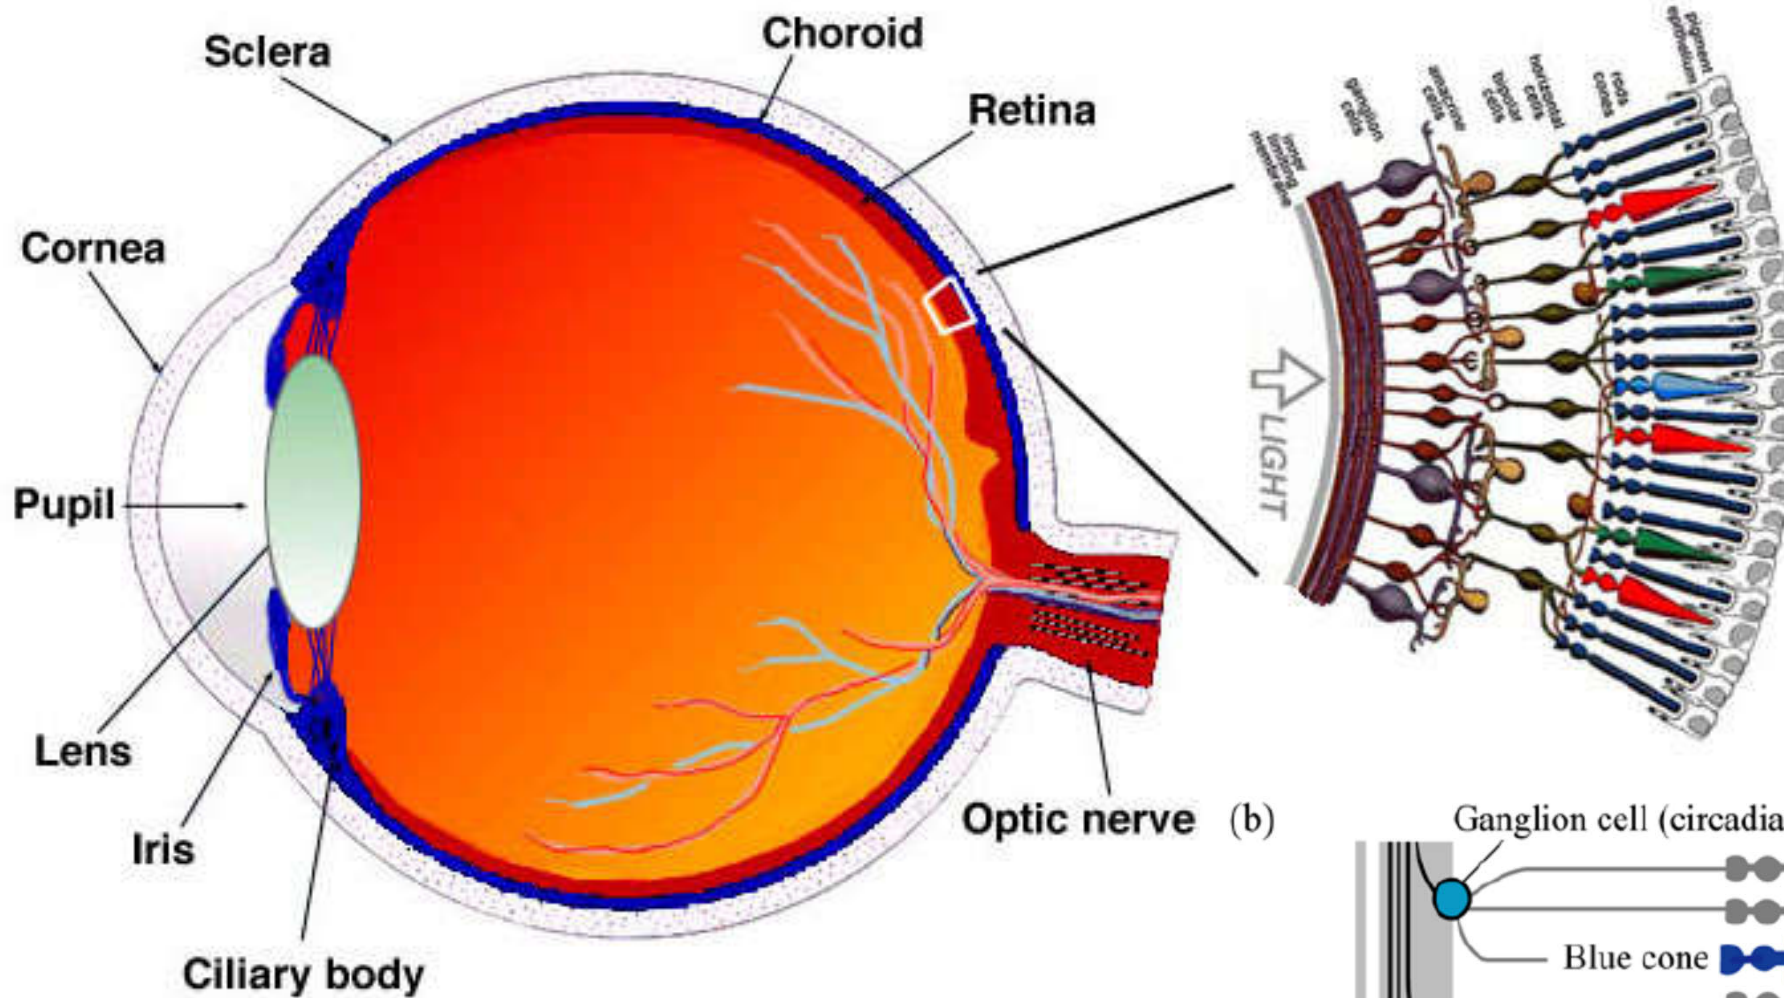


(* See also http://en.wikipedia.org/wiki/Photoreceptor_cell)

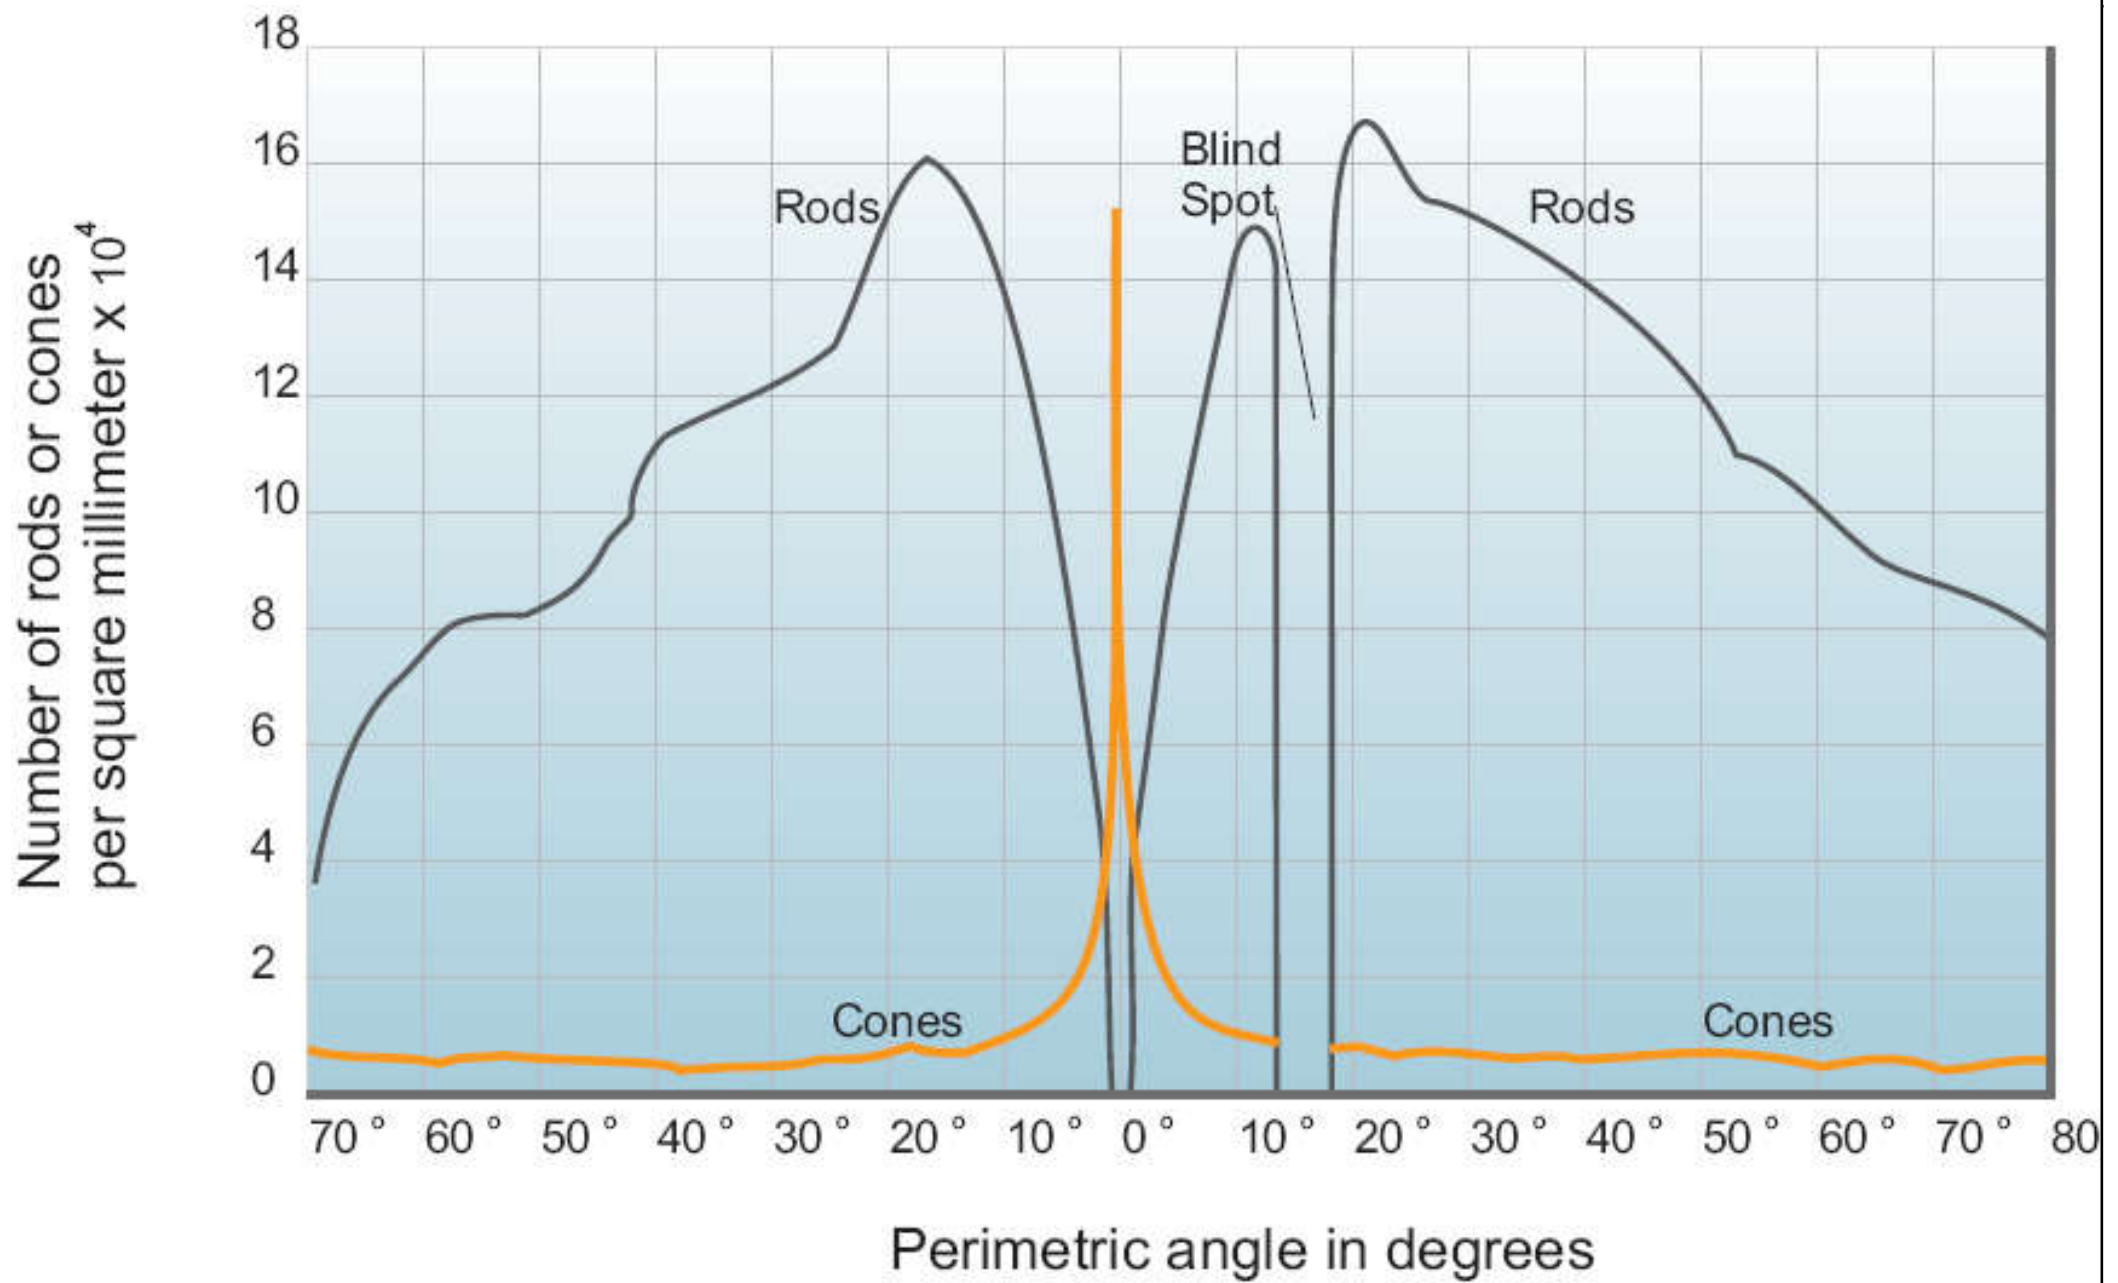



Distribution of rods and cones in the retina

(Source: Advanced Lighting Guidelines 2001, adapted from IESNA Lighting Handbook, 9th ed.)


Human Eye



- Functions performed by the eye
 - 1. Adaptation
 - 2. Accommodation
 - 3. Eye movements

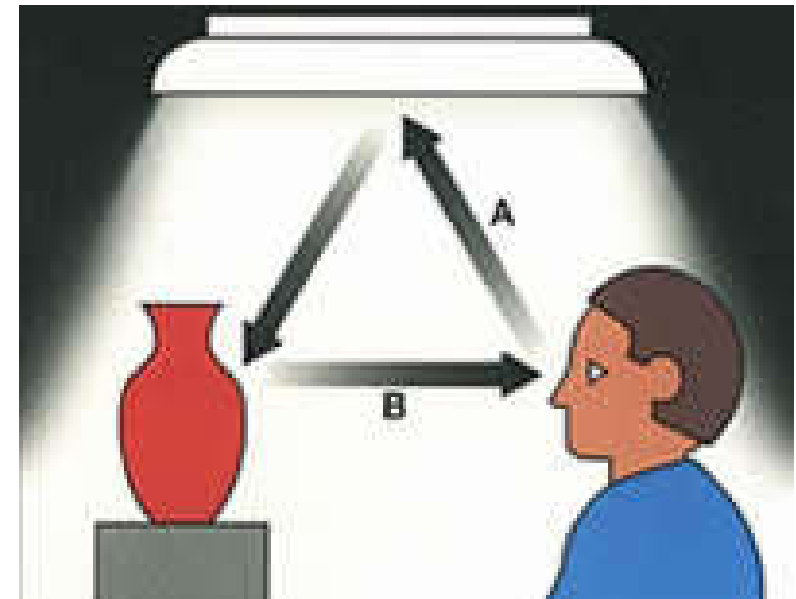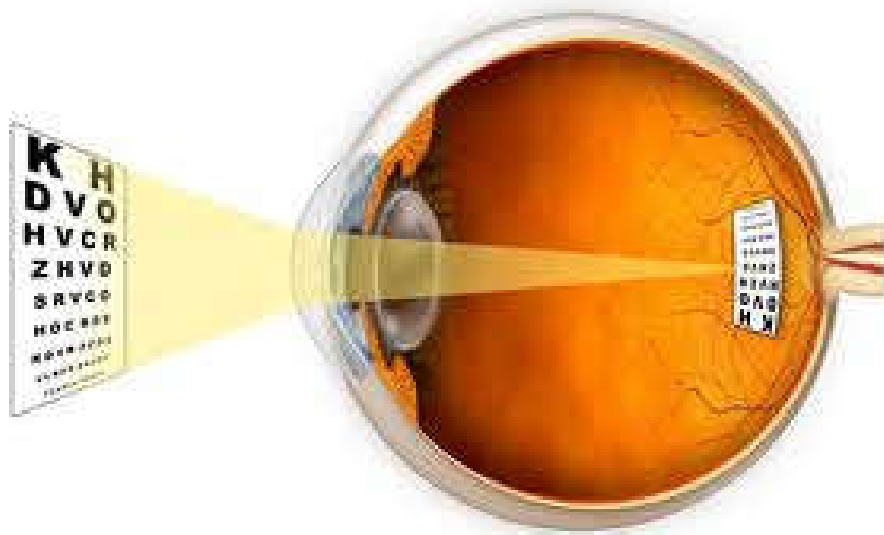


Human Eye



- 1. Adaptation

- The process through which the eye changes its sensitivity to respond to different levels of light stimulation
 - Such as from dim “moonlight” to clear sky “daylight”
 - May take > 60 minutes for complete dark adaptation
- Pupil size – 64 distinct magnitudes of control
 - Accounts for quantity of light entering eye and depth of field
- Photochemical adaptation – over 1,000 levels


Human Eye



- 2. Accommodation


- A process to focus images onto the retina by adjusting the curvature of the lens (by tightening the ciliary muscles)

- *Near point* - closest distance at which objects can be focused (about 100-750 mm)

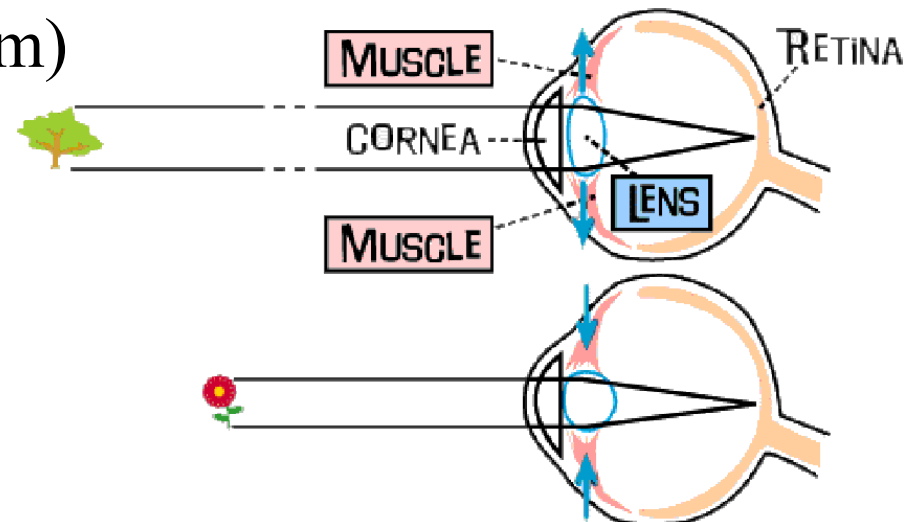

(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/accom.html>)


Human Eye




- Common refractive errors in accommodation:
 - Myopia (near-sightedness) 近視 – cannot focus on far objects [Image forms in front of the retina]
 - Hyperopia (far-sightedness) 遠視 – cannot focus on near objects [Image forms behind the retina]
 - Astigmatism 散光 – a difference in horizontal vs. vertical focus due to asymmetric cornea shape [Multiple foci are formed]
 - Presbyopia 老花 – cannot focus on near objects due to loss of lens elasticity in the elderly [Near objects focus behind the retina]


(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/eyedef.html>)

Human Eye



- 3. Eye movements
 - Smooth pursuit movement – binocular
 - Saccadic movement – “jumping” focus when scanning areas
 - Disjunctive eye movements – opposing eye movements for different distances

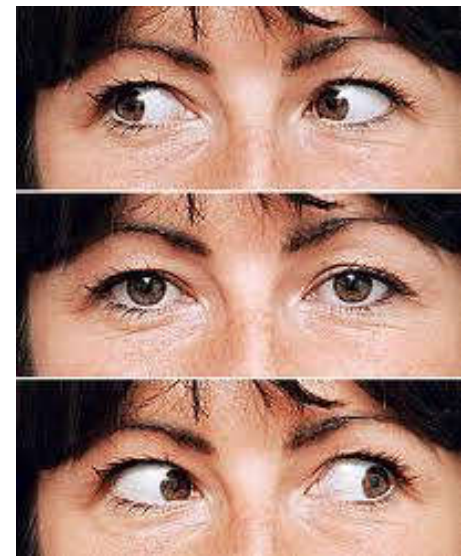


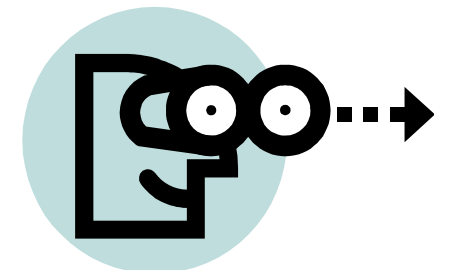

Vision

- Principle of VISION
 - Light energy → retina (photo-chemical) → optic nerve (electrical signal) → brain (sight centre)
 - Initial information: brightness + colour
 - *Stereoscopic effect* of two eyes (size & position)
 - The brain selects items in the *field of view*
 - The *sense of vision* depends on interpretations from previous experience




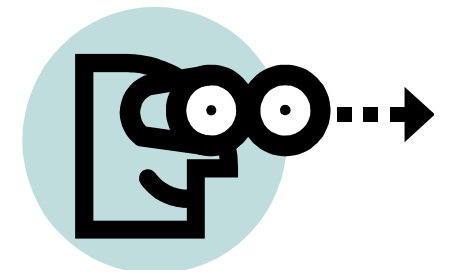



Vision

- Characteristics/Regimes of VISION
 - *Scotopic vision* 暗視 - in the dark by the rods
 - Luminance 10^{-6} to 10^{-2} cd/m² (dark adapted, by rods)
 - Low ambient light; only see in shades of grey
 - *Mesopic vision* 暮視 - between 10^{-2} and 10 cd/m²
 - Sense of brightness & colour; foveal detection
 - *Photopic vision* 適光 - above 10^{-2} cd/m²
 - By cone mechanism (light adapted); in colour
 - High ambient light; enables details to be seen

Ranges of scotopic, mesopic and photopic visions


(Source: Advanced Lighting Guidelines 2001 and www.ecse.rpi.edu)

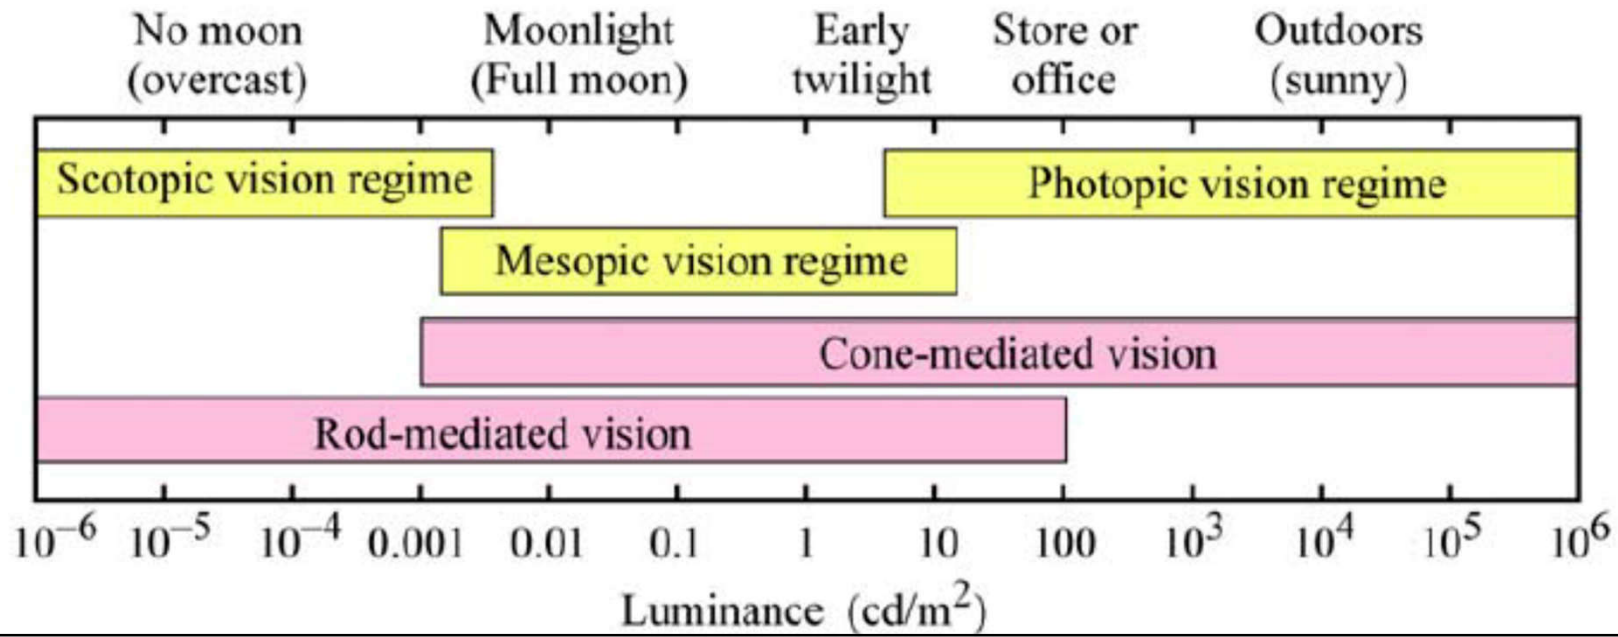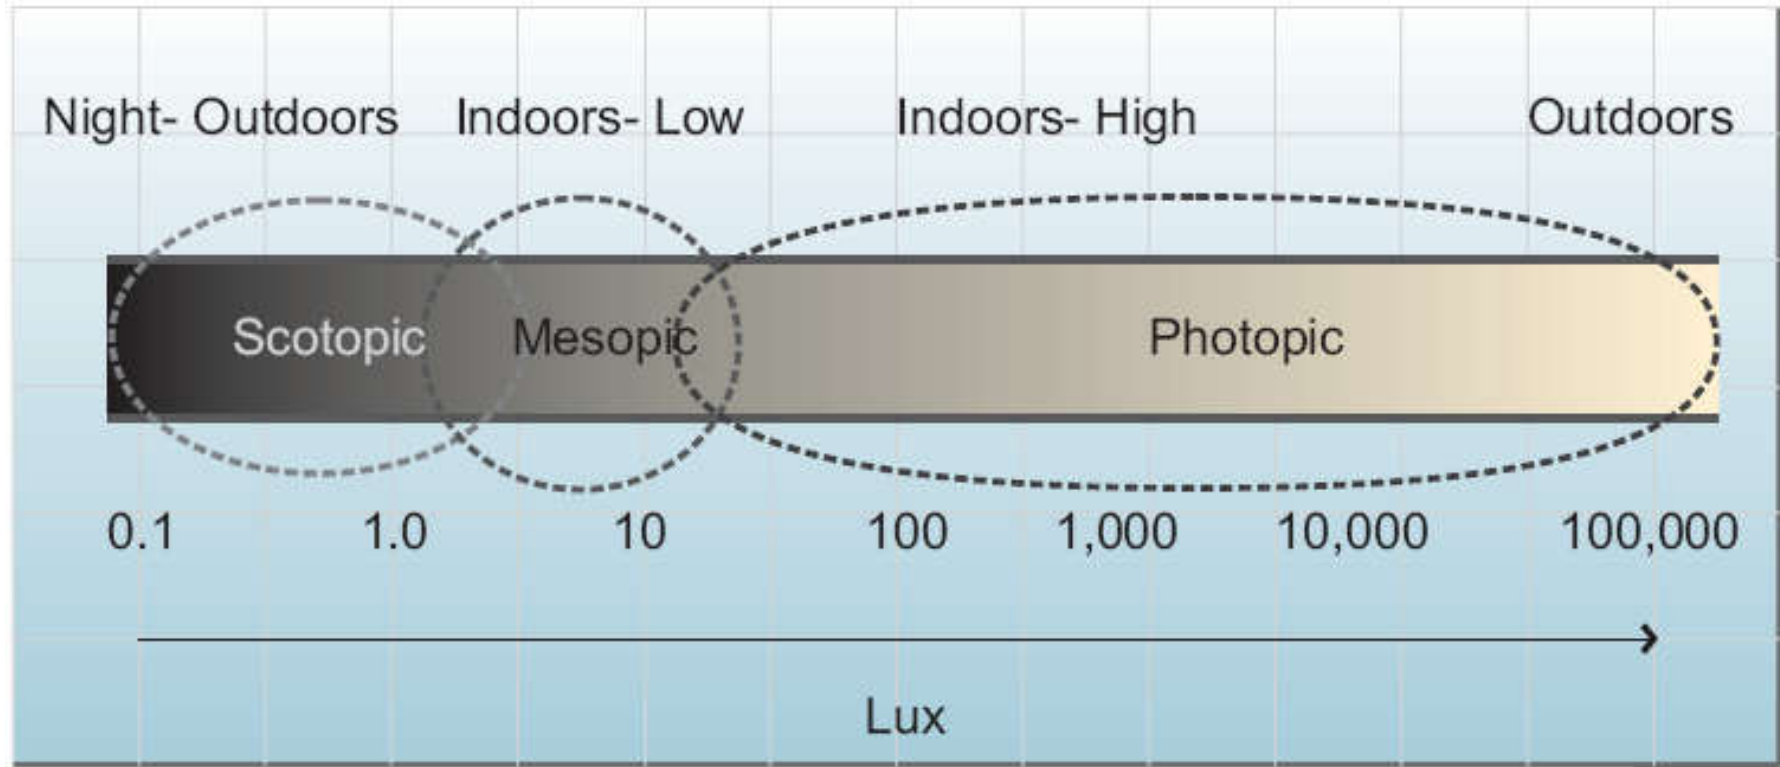

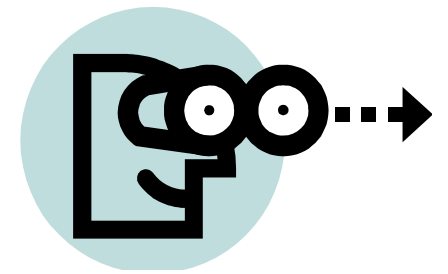


Vision

- Purpose of vision
 - The primary goal of any lighting system is to provide a proper stimulus for the human visual system
- Processing of visual information
 - 1. Depth perception
 - 2. Motion detection
 - 3. Brightness perception
 - 4. Colour deficiencies in the visual system

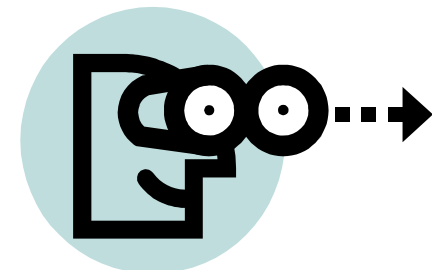

Vision

- 1. Depth perception
 - Pictorial cues
 - Relative image size due to distance or scale of known objects
 - Interposition or layering
 - Shadowing, perspective, or surface texture
 - Motion parallax – relative movement between any two objects at different distances
 - Binocular cues
 - Eye convergence – “cross-eyedness”
 - Binocular disparity or parallax – “stereo” vision

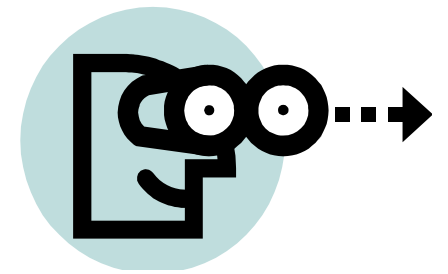


Vision

- 2. Motion detection
 - Stroboscopic integration – perceived motion from stills
- 3. Brightness perception*
 - Luminance is measurable quantity of light reflected from objects
 - Brightness is the perceived difference in light reflected from objects
 - Simultaneous contrast – the perceived difference in brightness of two objects of the same luminance when viewed against different backgrounds

(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/bright.html>)

The eye's response to equal energy of radiation

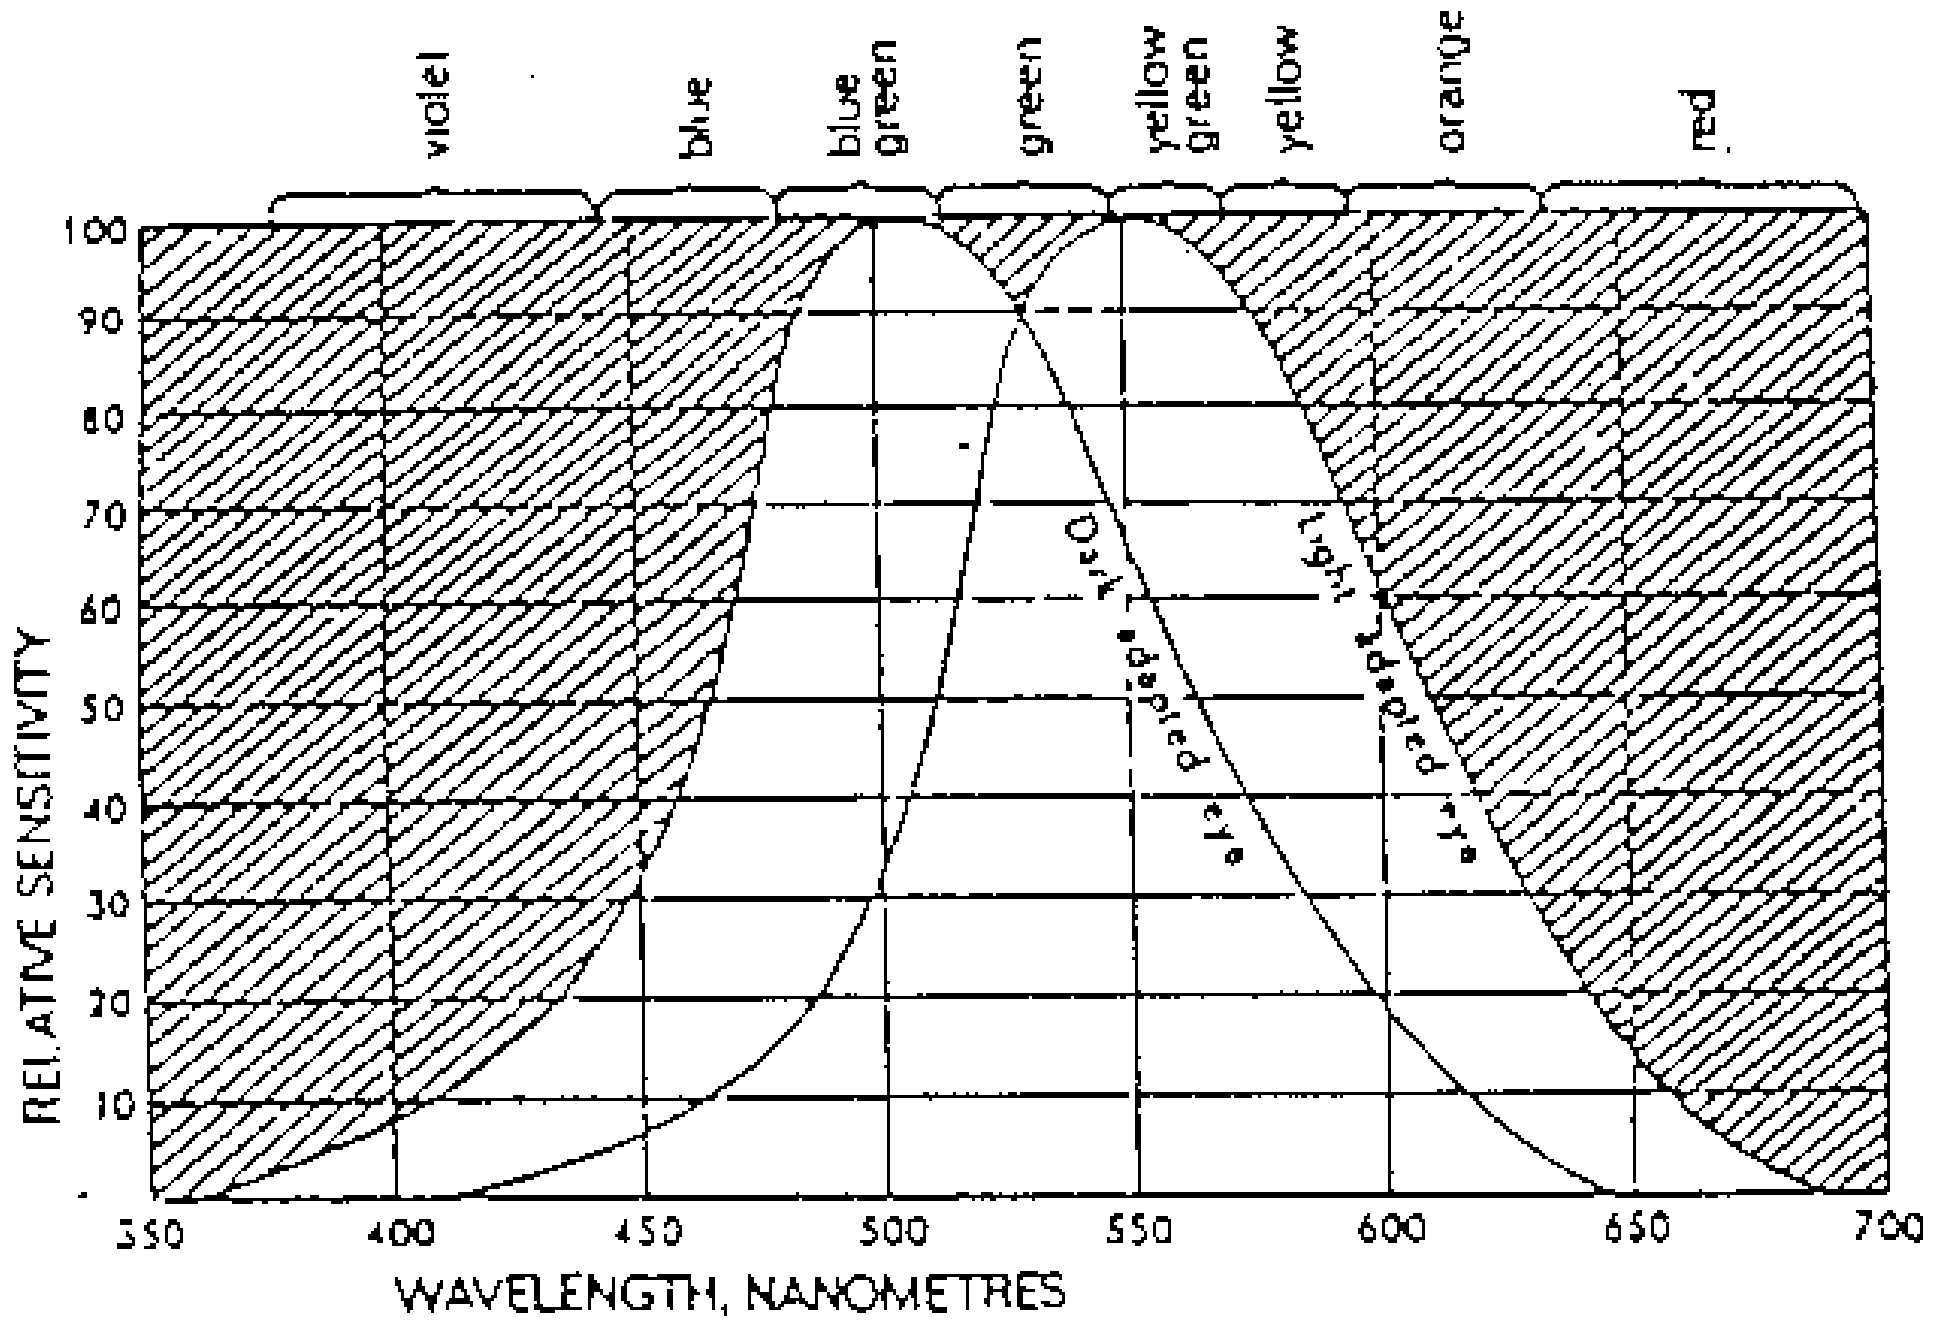

violet blue blue green green yellow green yellow orange red

Scotopic (dark adapted) vision and photopic (light adapted) vision

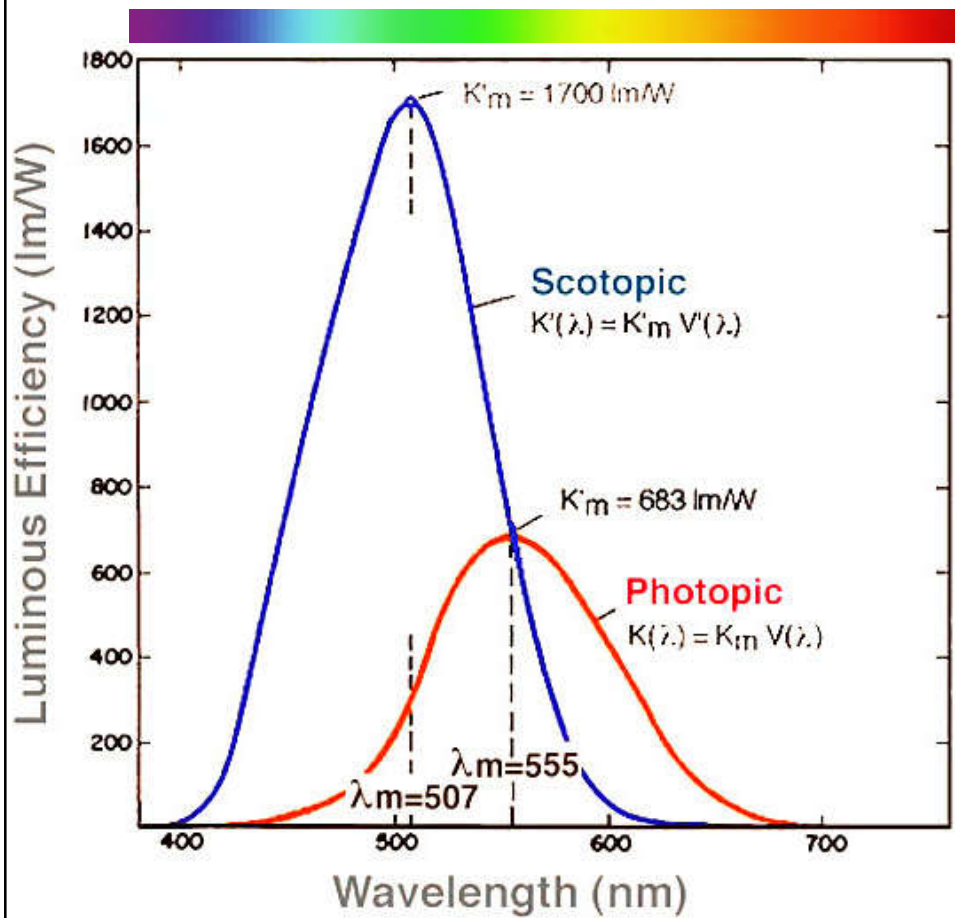


Figure 9. The scotopic and the photopic curves of spectral luminous efficacy (non-normalised values).

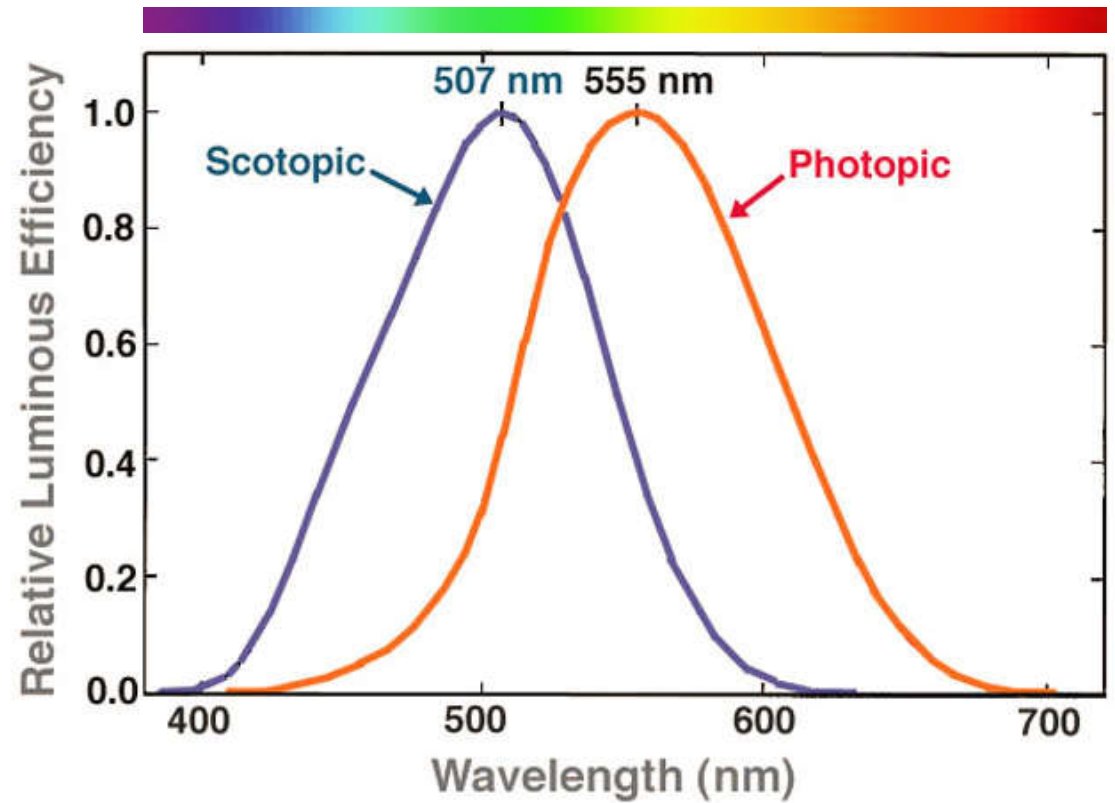


Figure 10. The scotopic and the photopic curves of relative spectral luminous efficiency as specified by the CIE (normalised values).

HIGH


Contrast is necessary for visibility

MEDIUM

Contrast is necessary for visibility


LOW

Contrast is necessary for visibility

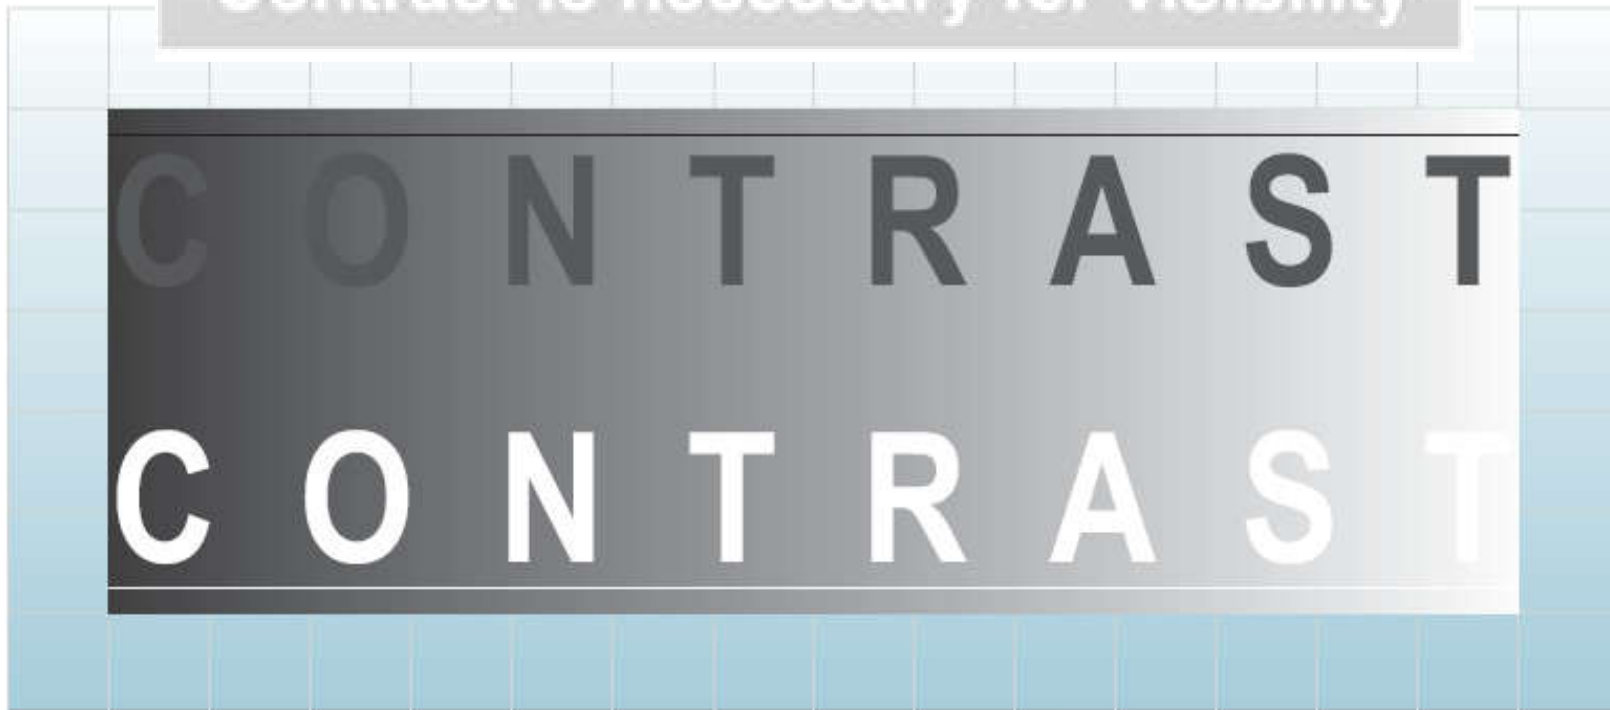

Visual contrast – lack of contrast can reduce visibility




(Source: Advanced Lighting Guidelines 2001)

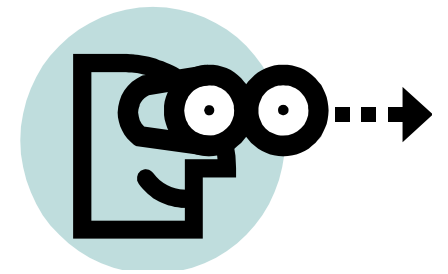


Vision

- 4. Colour deficiencies in the visual system
 - Colour-blindness – deficiencies in or lack of cone sensitivity
 - 8% of males
 - 0.5% of females
- Measuring vision
 - Visual acuity – measure of the smallest detail a person's visual system can resolve
 - Contrast sensitivity – the ability to detect the presence of luminance differences
 - Contrast detection – the contrast at which an object is just visible

Measuring vision

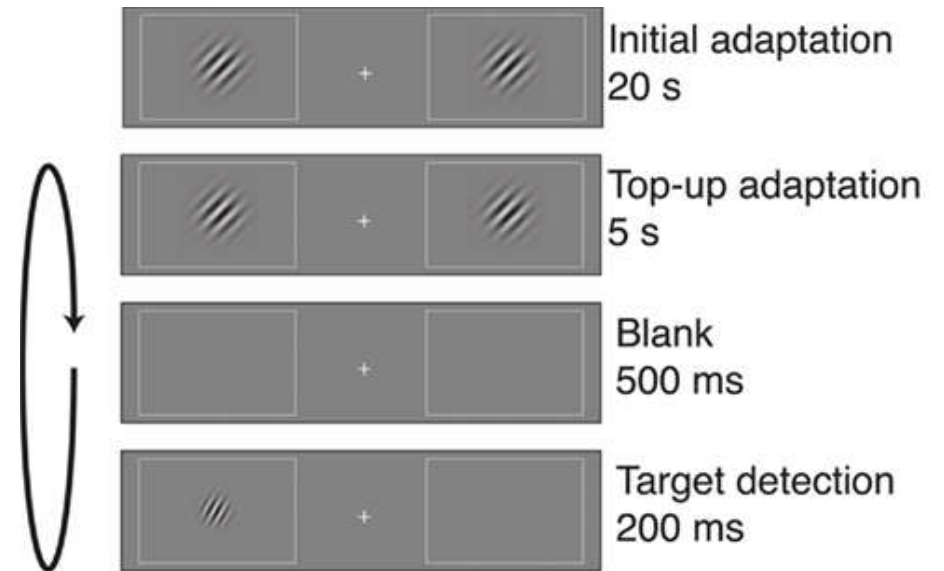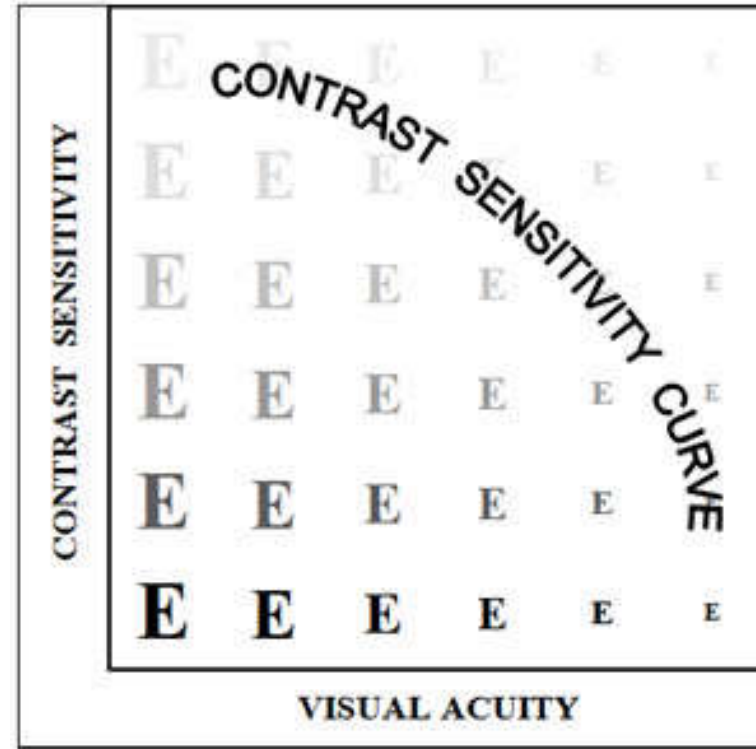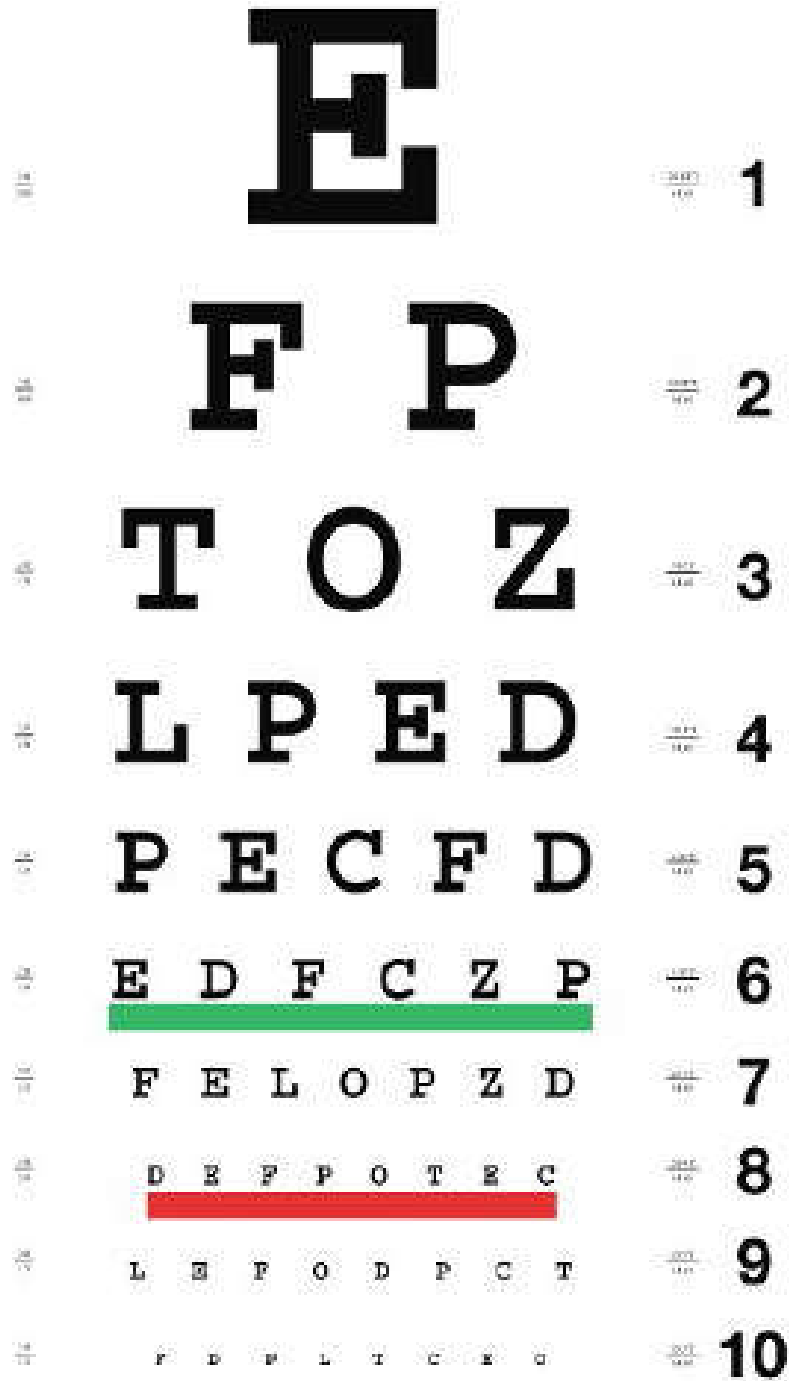


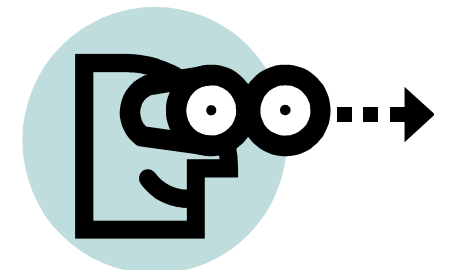

Vision


- Effects of aging
 - Increased lens opacity – light scattering within the eye flare
 - Crystalline lens yellowing – reduced blue vision
 - Presbyopia – loss of lens elasticity and near vision
 - Reduced pupil size – less light reaching retina – more light required
 - Increased visual processing and adaptation time – reduced performance
 - Decreased acuity and contrast sensitivity – due to



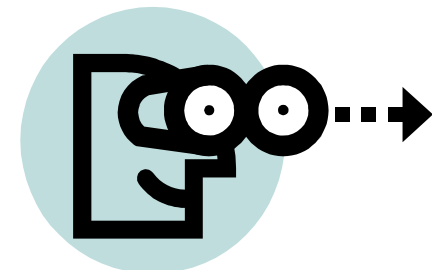

Vision

- Task parameters affecting performance
 - Contrast (C) – relationship between object and background luminances (L)
 - $C = (L_{\text{task}} - L_{\text{background}}) / L_{\text{background}}$
 - Size – visual angle subtended by an object from an observer
 - Luminance – quantity and quality of light reflected from an object
 - Time – viewing time necessary to process vision

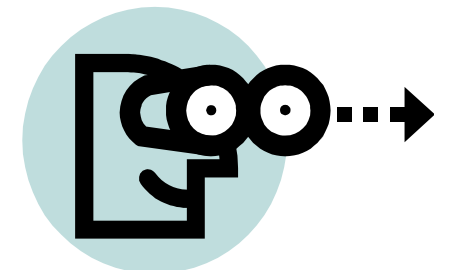

Vision

- Building design considerations

- Discomfort glare

- Luminance which causes visual discomfort

- Source luminance, position, size, number of sources, field luminance

- Disability glare

- Luminance which adversely affects visual performance

- Veiling reflections

- Reflected luminance which prevents visual performance

- Tasks viewed at a mirror angle to a source





Bright light entering
from a window




Veiling reflection from
overhead light source

Examples of glare and veiling reflection




It is critical that lamps and luminaires be selected to mitigate the problem of discomfort glare.


Colour



- You will learn:
 - Characteristics of light and colour
 - Creation and perception of colour
 - Interaction of environment & human visual system
 - How colours are specified and quantified

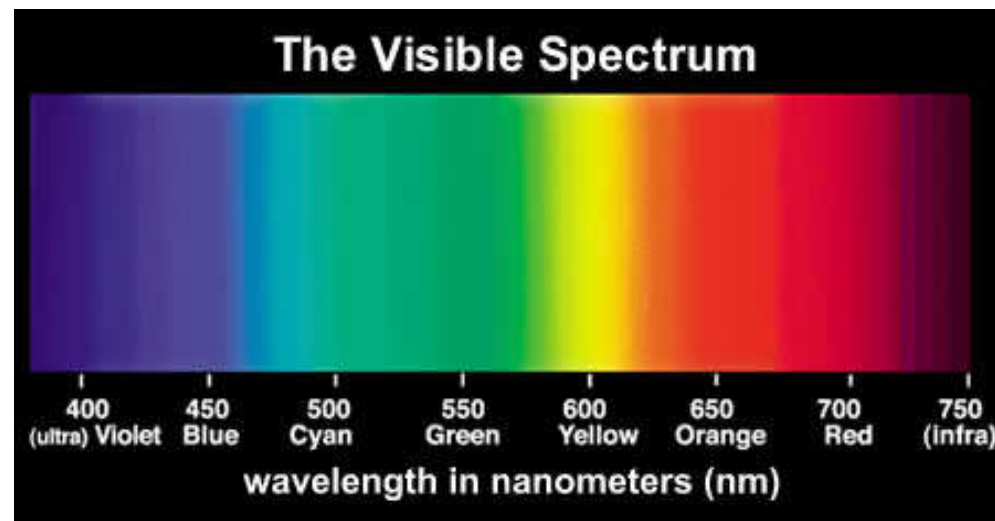

Colour



- White light
 - All wavelengths combined at approximately equal power levels


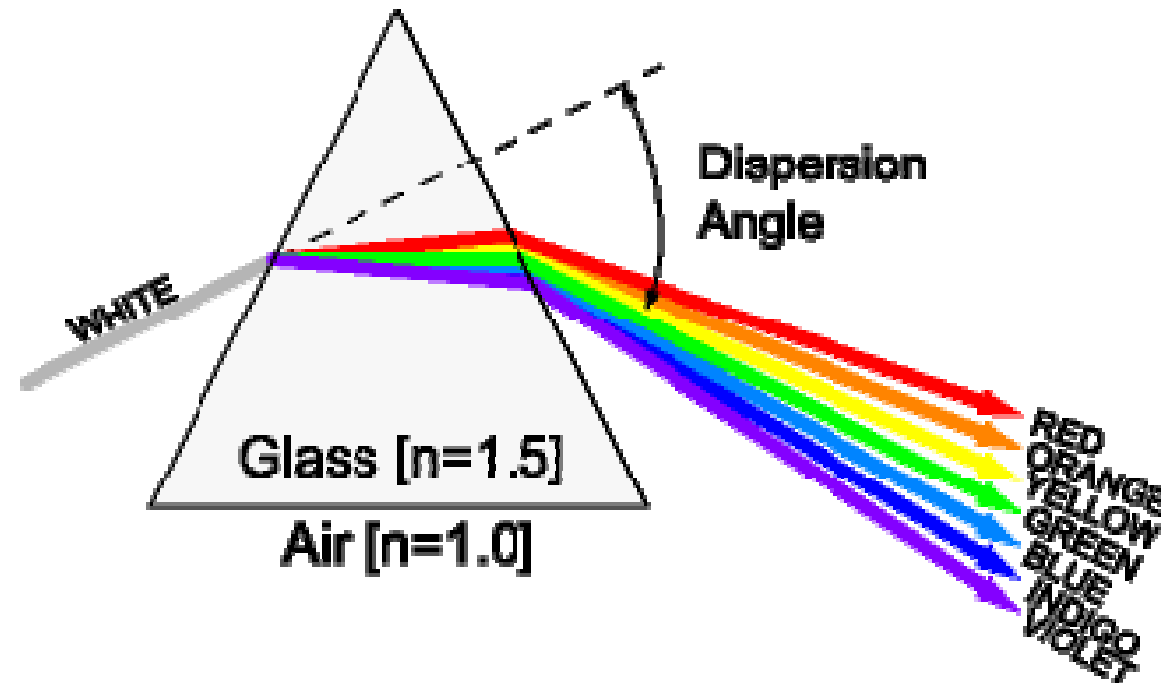



Fig. 4.8 Refraction through a prism.

Colour




- The two types of receptor cells
 - Rods – *scotopic vision*
 - Night and peripheral vision
 - See very low luminance levels
 - Surfaces appear as shades of gray or blue/gray – difficult to distinguish between colours
 - Cones – *photopic vision*
 - Responsible for colour vision at normal interior and exterior lighting levels
 - Colour experience determined by relative strength of the signal from each of three types of cones (R, G, B)

Colour




- Photopic vs. scotopic sensitivity
 - Spectral luminous efficiency curve or the V-lambda curve
 - Peak sensitivity shifts to lower wavelengths under scotopic (rod) vision – Purkinje shift*
 - Surface colour that appears lighter under photopic vision may appear darker under scotopic

(* See also http://en.wikipedia.org/wiki/Purkinje_effect)

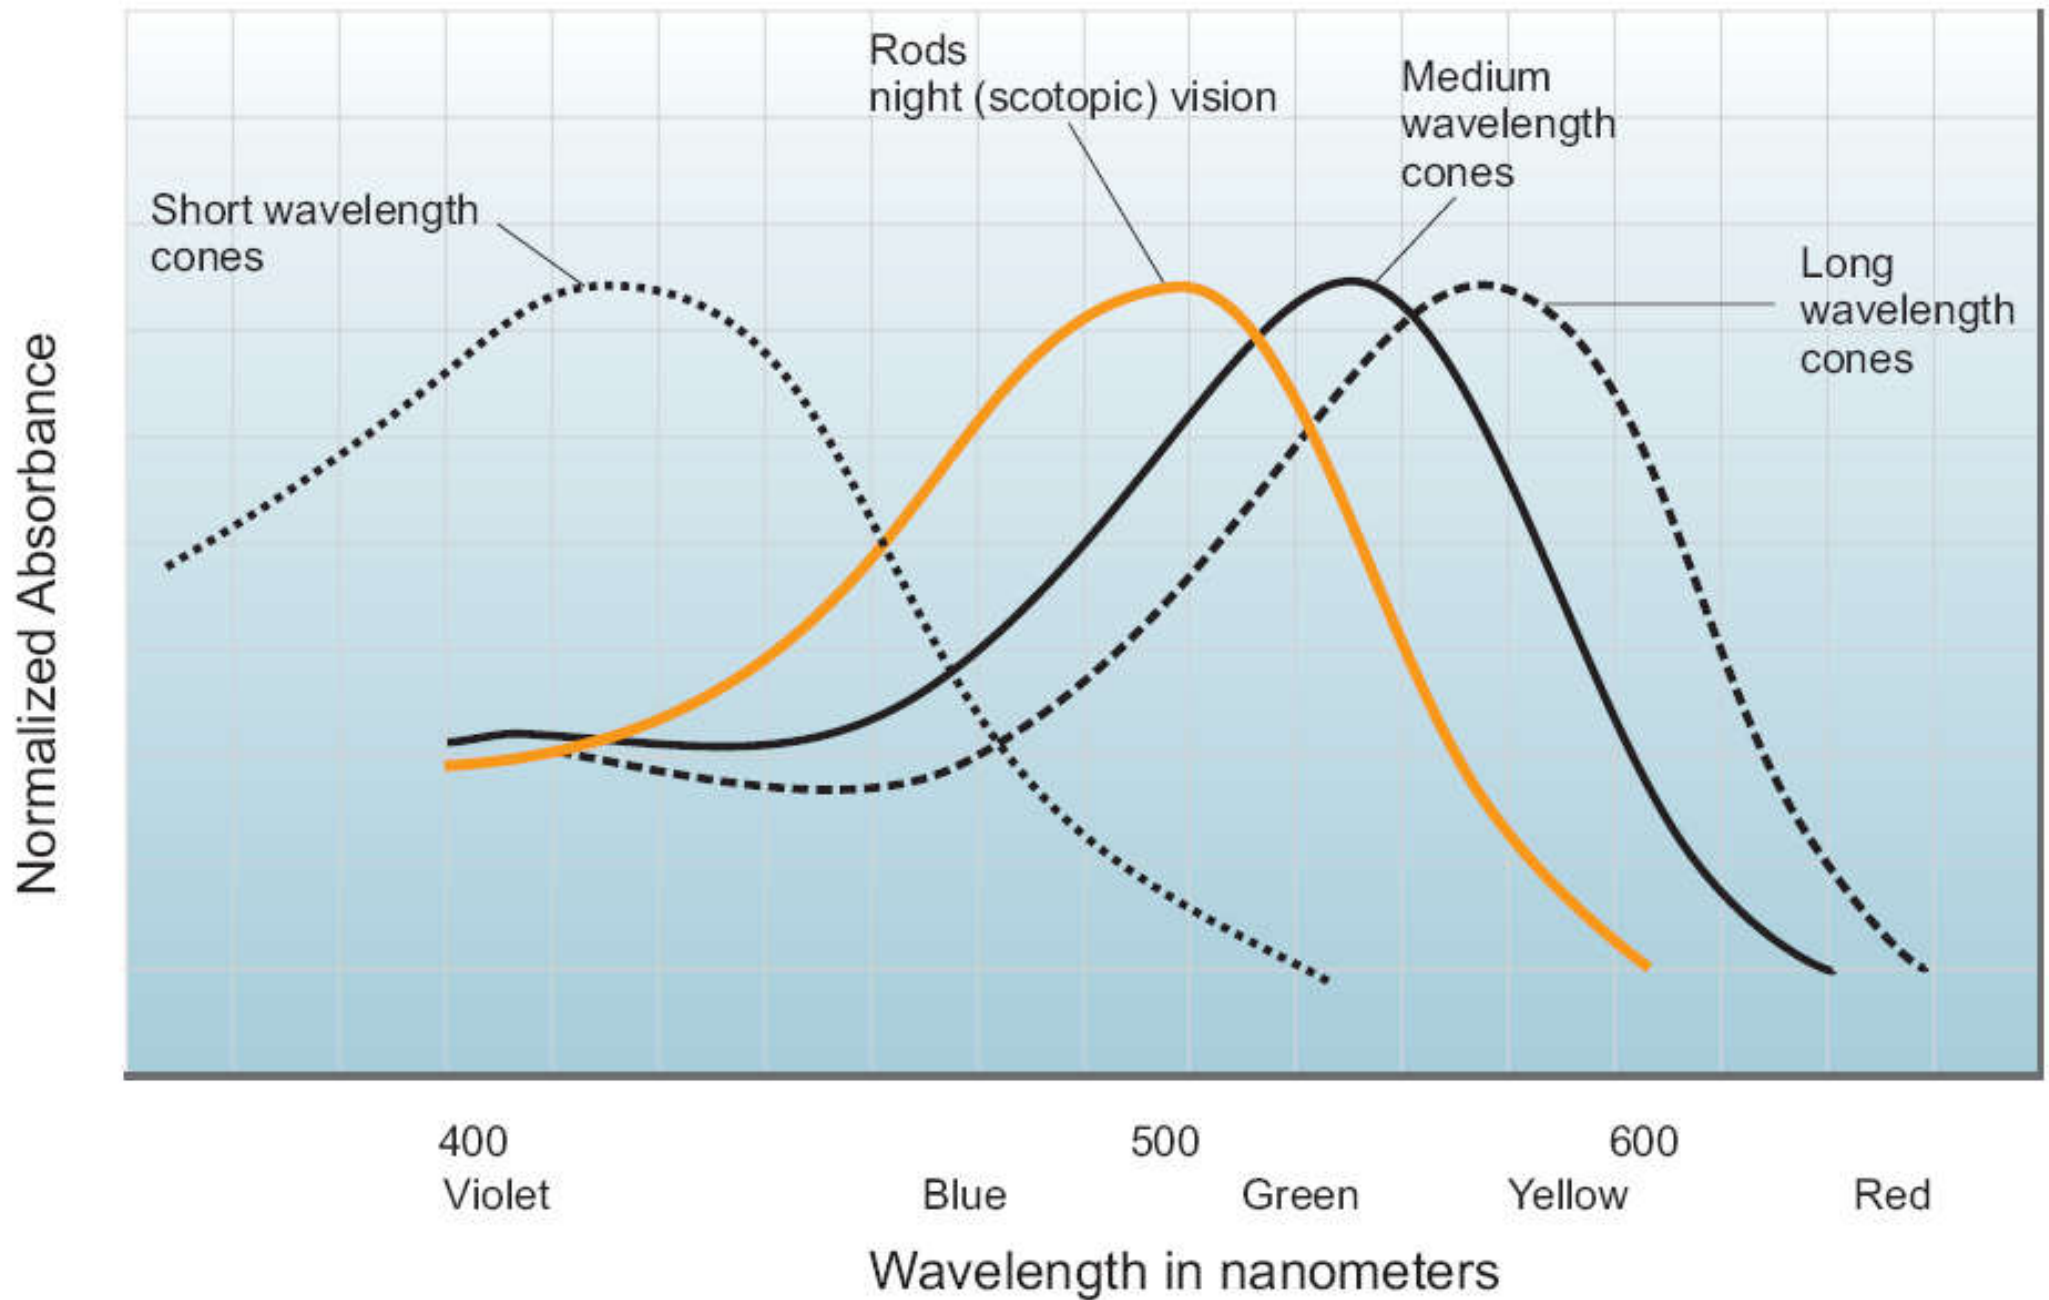


Spectral sensitivity of rods and cones
(Source: Advanced Lighting Guidelines 2001)

Colour



- Photopic curve
 - Used to determine the nos. of lumens present in a light source, given the spectral power distribution for a lamp
 - Trade-off between colour rendering and efficacy
- Mesopic vision
 - Rods and cones are nearly equal in sensitivity
 - Both photopic and scotopic systems contribute to response to object colour of different luminance
 - Luminance level is low so that rods and cones function at similar sensitivities, e.g. twilight


Colour



- Perceived object colour*
 - Visual experience
 - Based on relative proportions of different wavelengths of light reflected from a surface
 - Function of both surface characteristics and illuminant
 - Defined using three designations – Hue, Value and Chrome


(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/colper.html>)

Colour




- Hue
 - General description of the perceived colour of an object
 - Single colour name or combination of two adjacent colour names (red, yellow, green, blue)
- Value
 - Indicates the relative lightness or darkness of a colour – e.g. sky blue and navy blue
 - Value is related to gray scale – from black to white
 - The value of a particular colour is the value of the gray that is of the same relative lightness

Colour



- Chroma
 - Indicates how saturated a colour appears
 - Two colours may be of the same hue and value, but one more rich in hue – e.g. a gray blue and a rich blue
- Metameric match
 - A condition where a different source/reflectance producing the same relative signal from the three types of cones will be perceived as being equal in colour
 - (Note that it is possible that two materials which appear to match under one illuminant will not match under a second)

Colour



- Perceived colour of light source
 - Spectral content of emitted light determines source appearance
 - Two sources that appear to be the same colour may have different spectral compositions
 - Two sources that have the same colour appearance may have different colour rendering qualities




High CRI



Low CRI

Colour



- Function of the surround

- Simultaneous contrast


- Appearance of a colour is affected by the colour against which it is viewed

- Colour adaptation


- An after image, the compliment of the colour to which the visual system was adapted, appears over the region of the visual field that was exposed to that colour

- Demo of colour contrast and colour adaptation


- <http://www.psypress.co.uk/mather/resources/topic.asp?topic=ch12-tp-04>

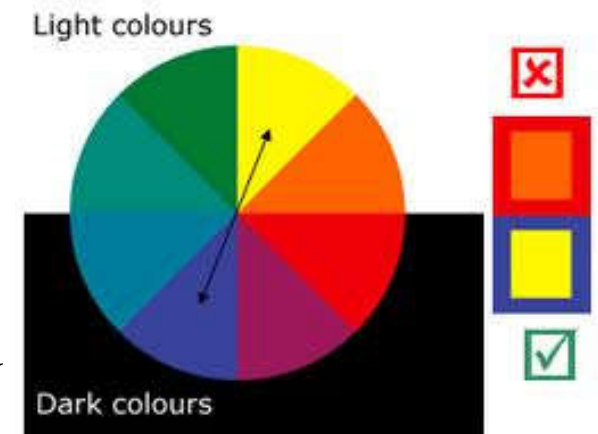

Colour




- Light source characteristics
 - Colour temperature
 - Colour rendering ability

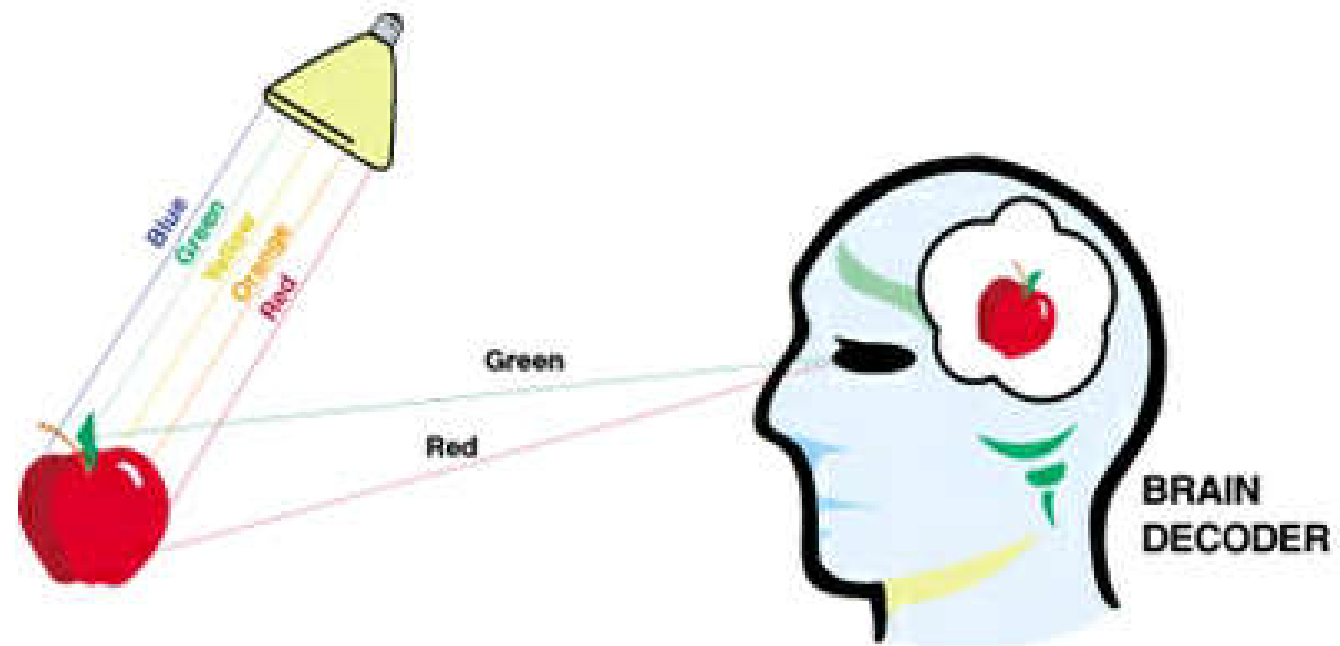


Objects as selective reflectors.

Colour




- Correlated colour temperature (CCT)
 - Used to specify source appearance
 - CCT equates the appearance of a source to a blackbody radiator operating at the same temp.
 - Expressed using Kelvin temp. scale
 - A lower CCT means longer wavelengths and warmer colour
 - Typical light source – 2,100 to 6,500 Kelvin

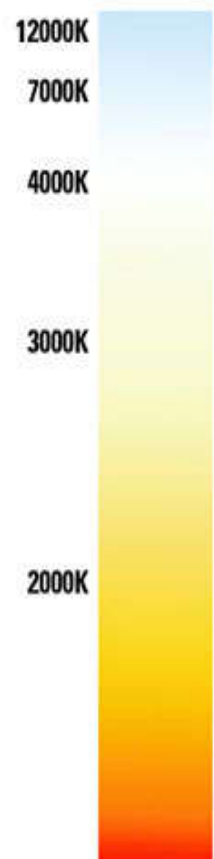


(* See also http://en.wikipedia.org/wiki/Color_temperature)

Effects of colour on lighting design

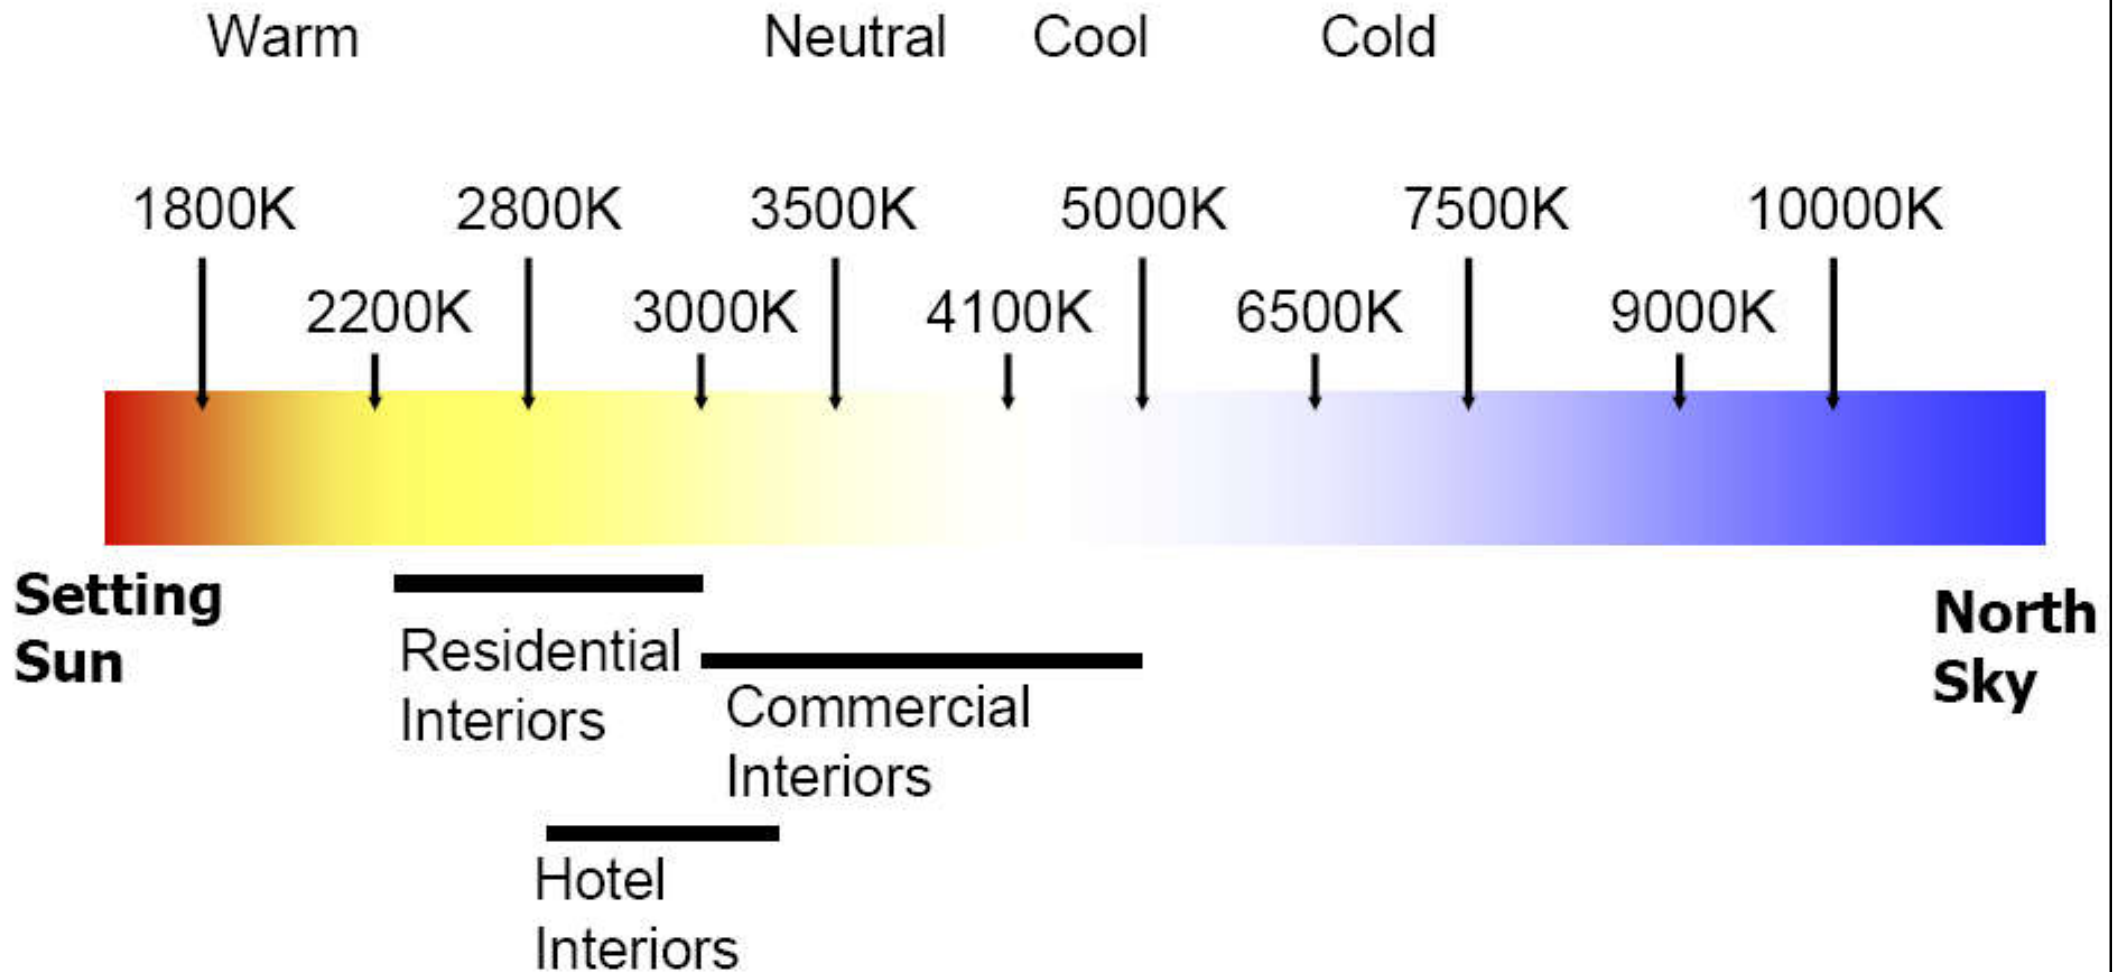

Colour



- Colour rendering index (CRI)
 - Used to evaluate light sources based on how well particular sample colours are rendered relative to a standard source at the same CCT
 - CRI index is a value from 0 to 100 that is a measure of the deviation in colour appearance that occurs when test colours are illuminated by the test source and the standard source
 - (A greater deviation results in a lower CRI value)

(* See also http://en.wikipedia.org/wiki/Color_rendering_index)



red-rich source

blue-rich source




Colour rendering index (CRI or Ra) of common lamp types

(Source: Philips Lighting, <http://www.lighting.philips.co.in>)


Lamp type	Ra	
Incandescent	100	
Fluorescent	Colour / 33	65
	Colour / 54	72
	Colour / 82/ 83/ 84	86
	Colour / 93/ 94/96	93
Low pressure sodium (SOX)	(- 44)	
High pressure sodium (SON)	26	
High pressure mercury (HPL – N)	45	
Blended light (ML)	60	
Metal Halide (HPI)	70	

Colour




- CIE Chromaticity Coordinates*
 - The system used for the specification of CCT
 - Based on three coordinates (x , y , z)
 - CIE chromaticity diagram describes how colours can be mixed
- Additive colour mixing
 - Primary colours – Red, Green, Blue
 - Other colours of the spectrum are achieved by mixing the primaries
 - White light = equal concentration of the primaries

(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/ciecon.html>)

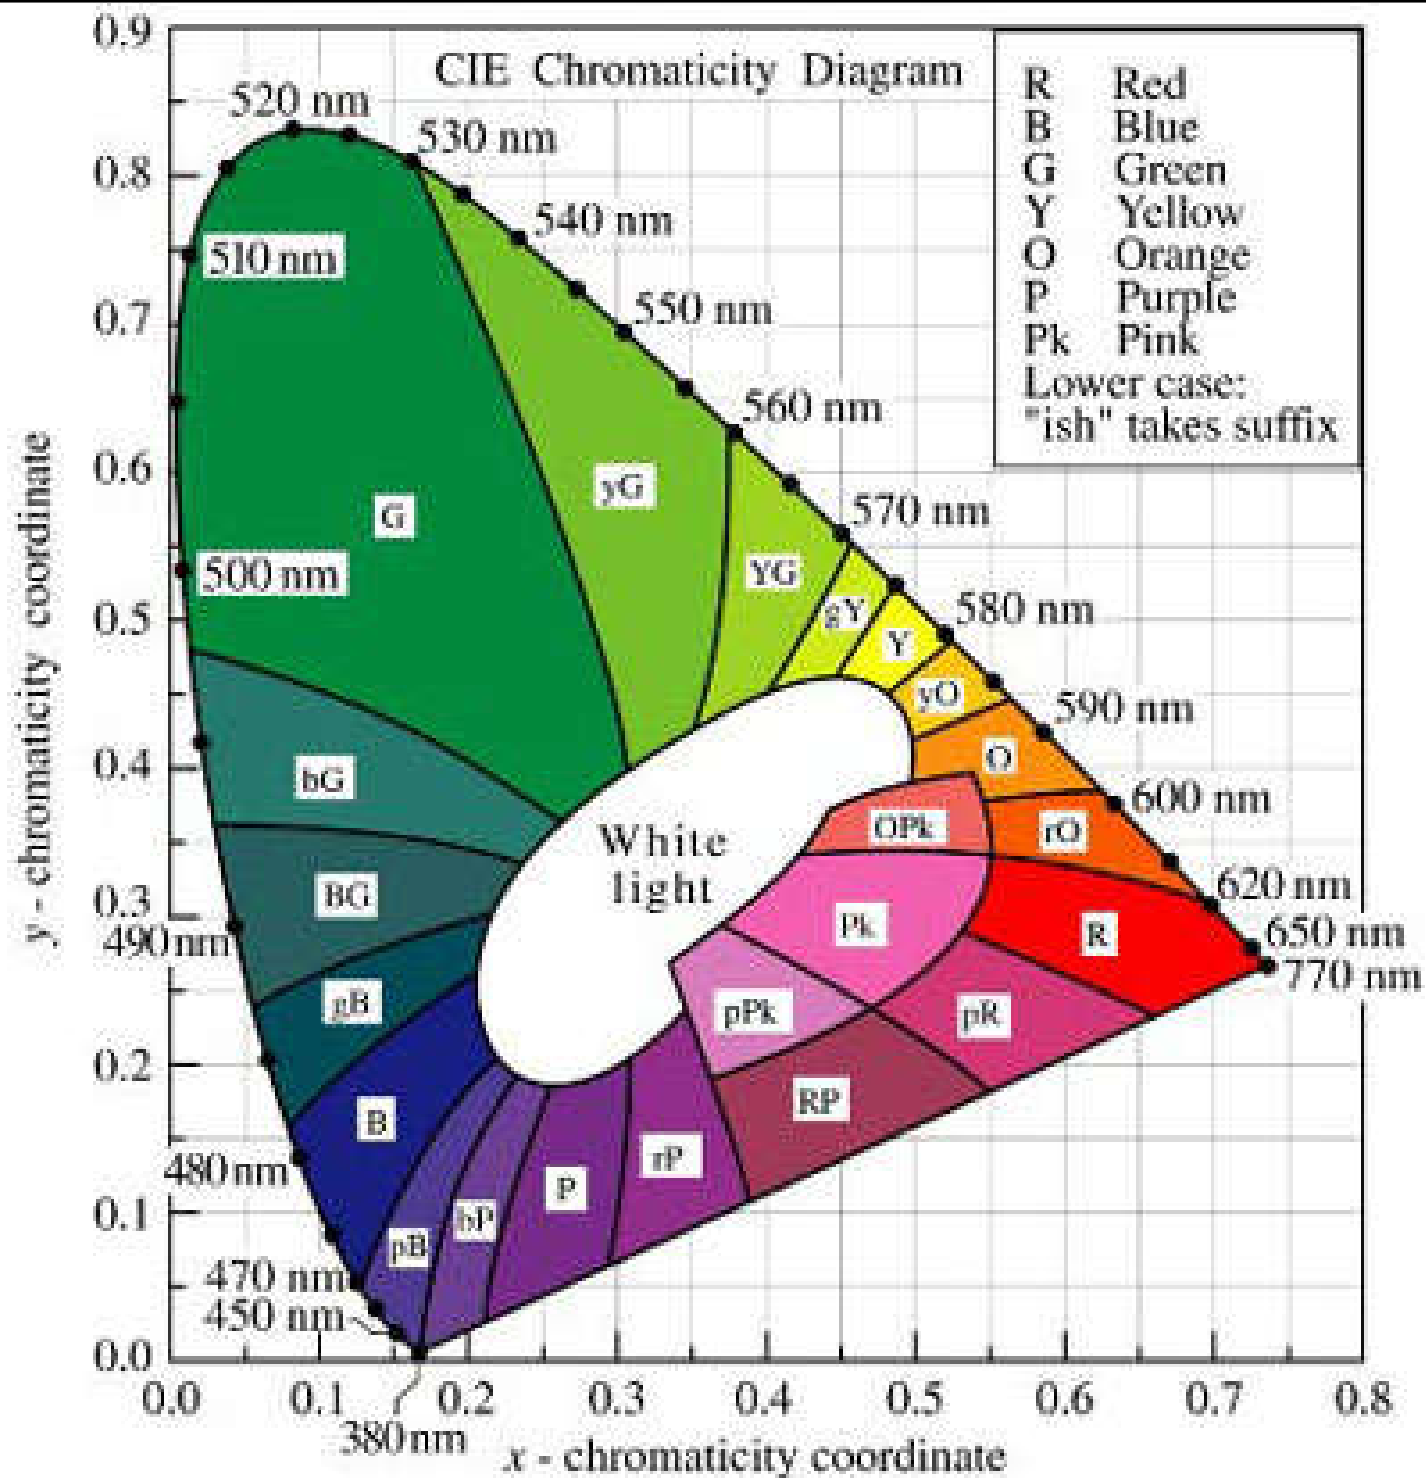


CIE chromaticity diagram

R = Red
G = Green
B = Blue
Y = Yellow
W = White
M = Magenta
C = Cyan

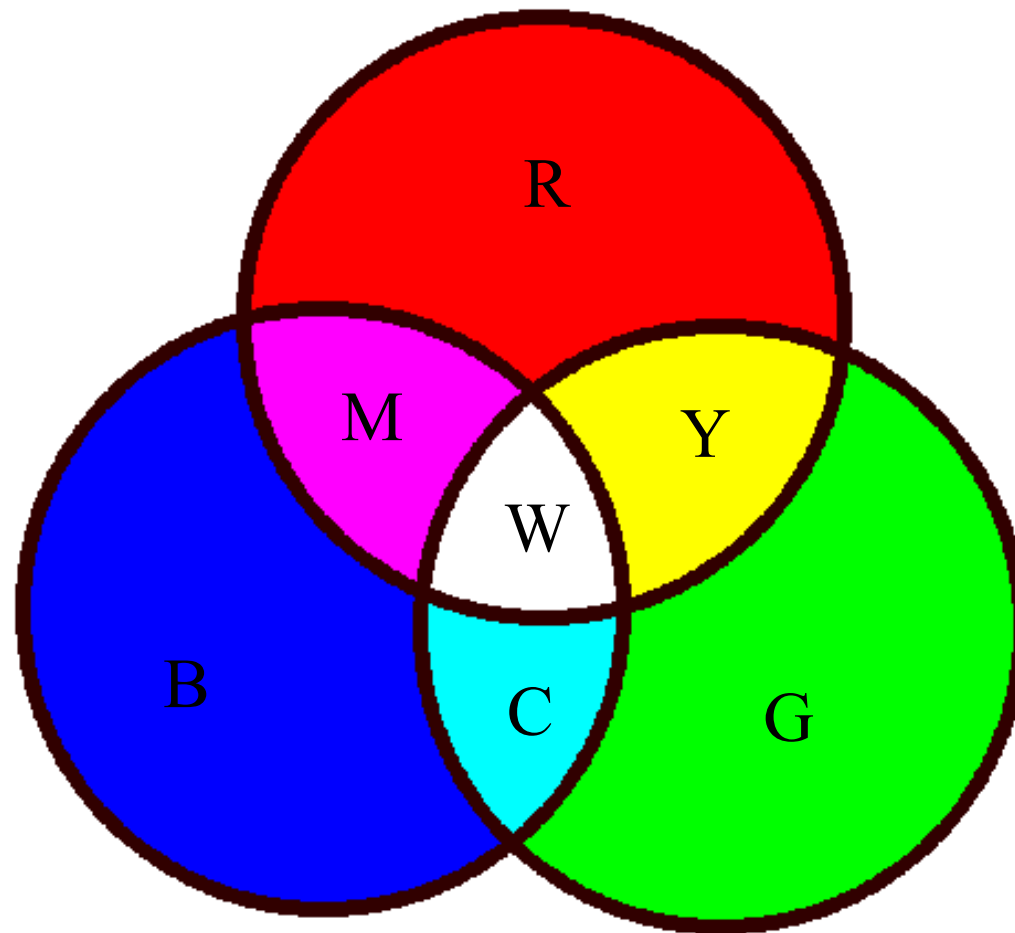


Additive colour mixture

Colour




- Subtractive colour mixing
 - Involves one source (broadband)
 - Selective reduction/elimination of certain wavelengths
 - Subtractive primaries – Red, Blue, Yellow
 - Adding these three primaries results in no colour experience

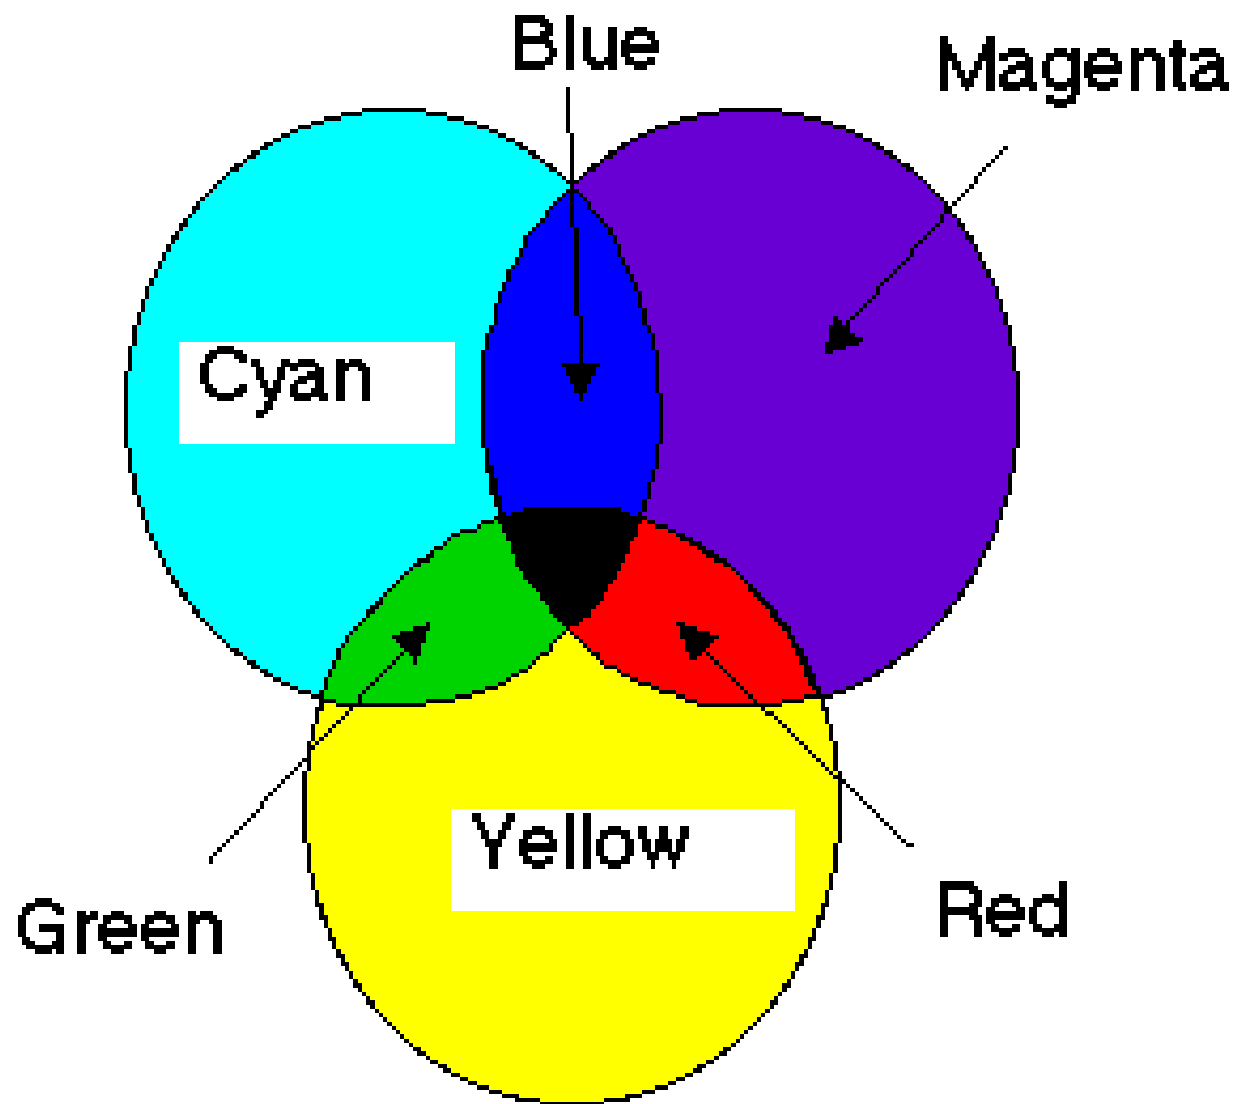

Subtractive Colour Mixing




Subtractive colour mixture

Colour



- Specification of colours*
 - Munsell system
 - Hue scale – 5 principal hues (red, yellow, green, blue, and purple)
 - Value scale – 10 equal visual steps from black to white
 - Chrome scale – 6-14 equal steps from no colour (white, gray, or black) to the strongest chroma for that level


(* See also <http://hyperphysics.phy-astr.gsu.edu/hbase/vision/colsys.html>)

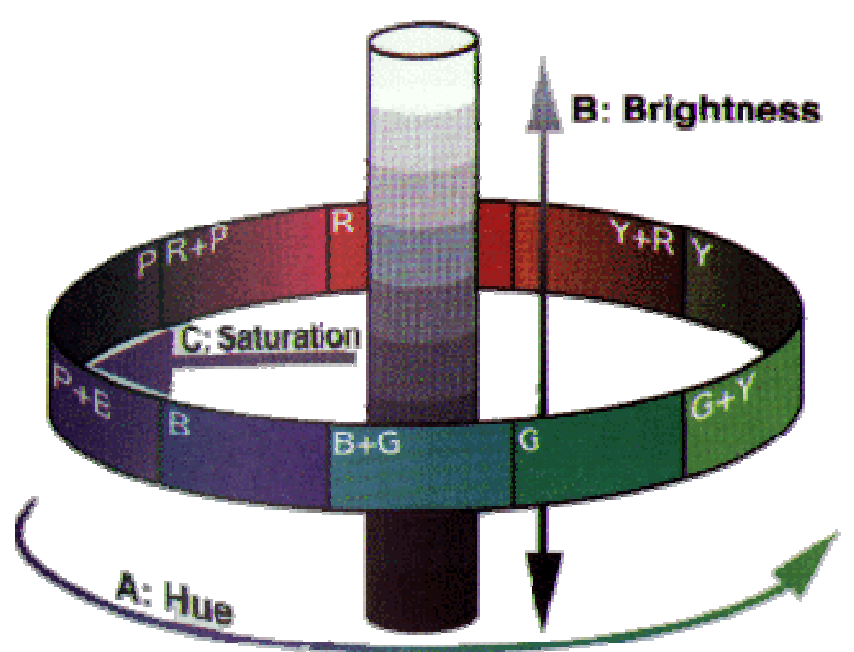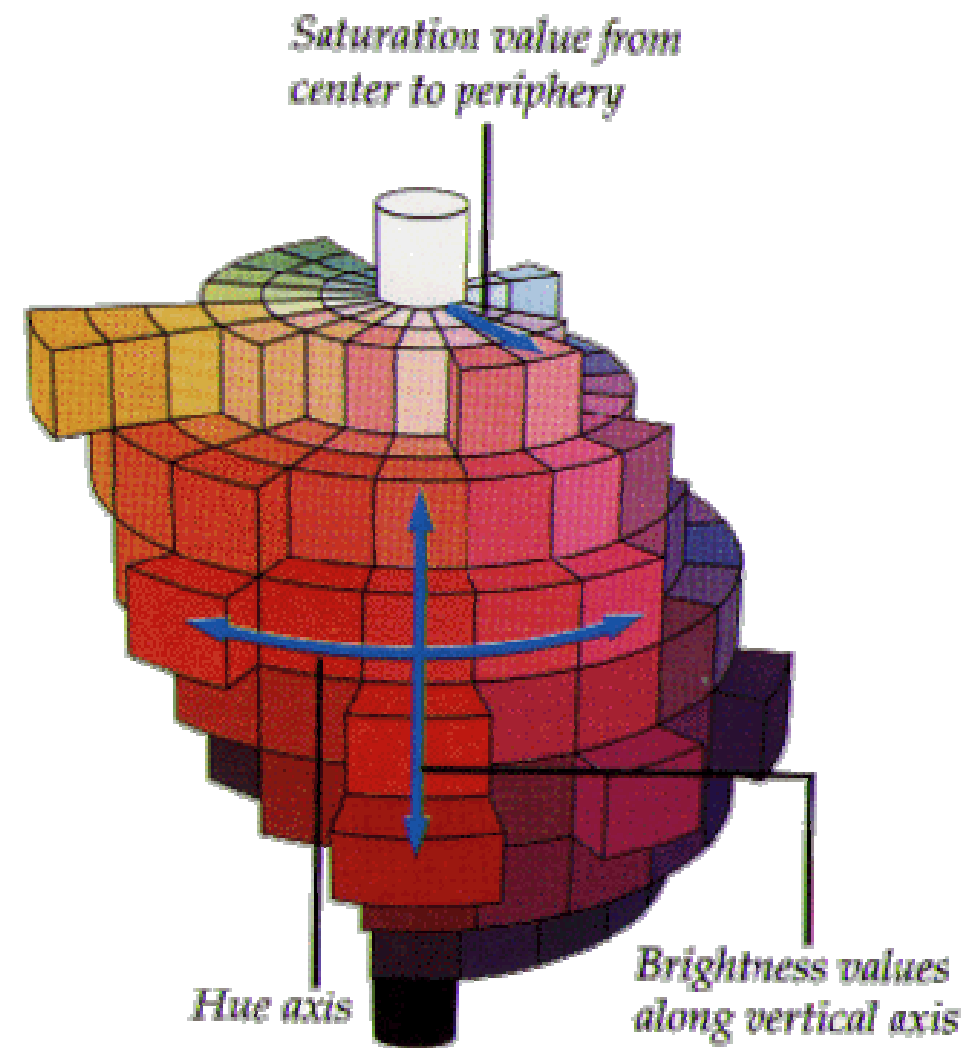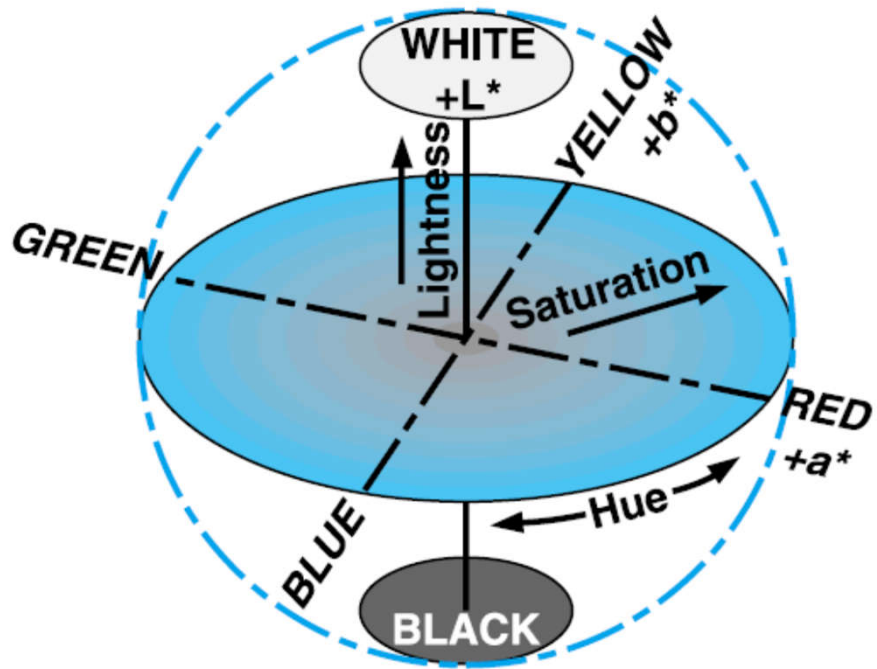


Munsell System

Munsell system


Colour



- Daylight and colour
 - Daylight has excellent colour rendering quality with a CRI of 100
 - Colour temperature is high – cool or bluish-white
 - If electric light sources are used in a daylighted area, those of high colour temperature are preferred

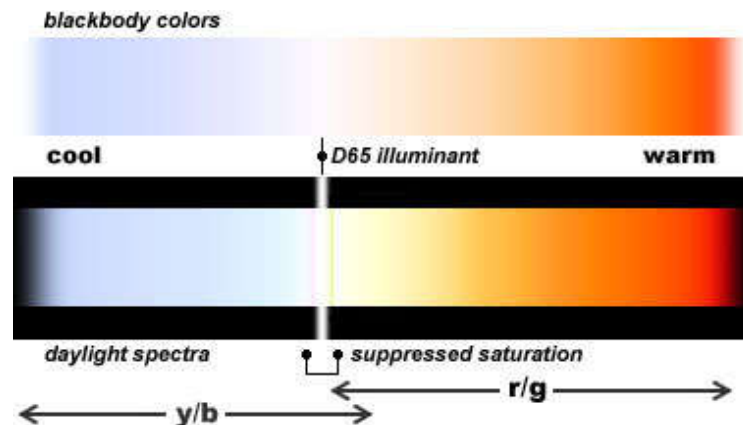


Colour




- Light sources
 - Colour rendering and colour temperature differ with spectral power distribution
 - Incandescent – good colour rendering (halogen has a higher colour temperature)
 - Fluorescent – range of colour temperature and colour rendering ability
 - High intensity discharge (HID) – mercury, metal halide and high pressure sodium provide a range of colour temperature and colour rendering ability


Incandescent

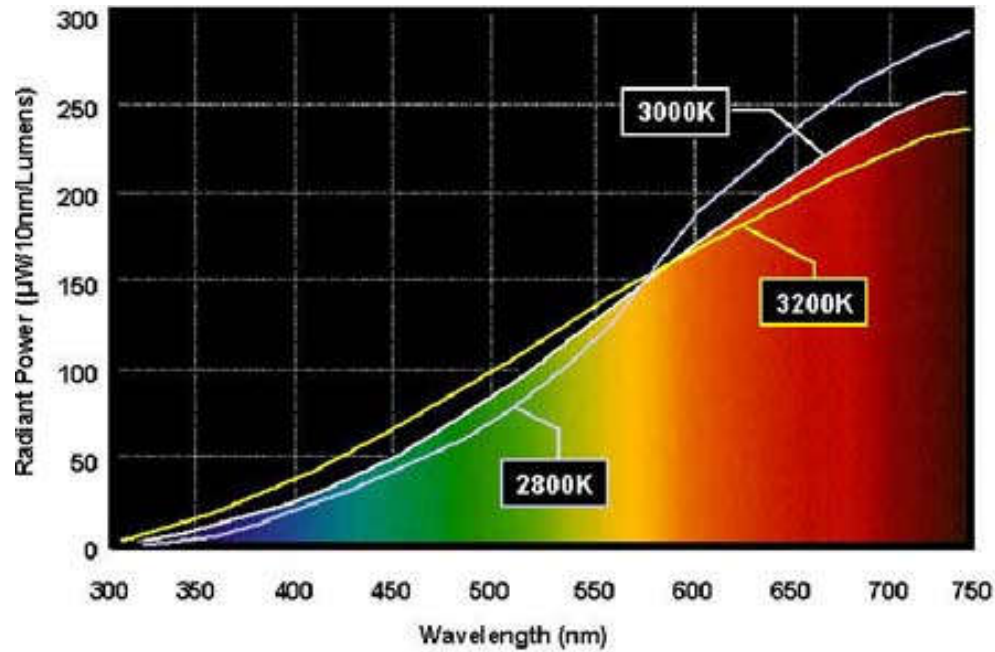


Fluorescent (cool white)

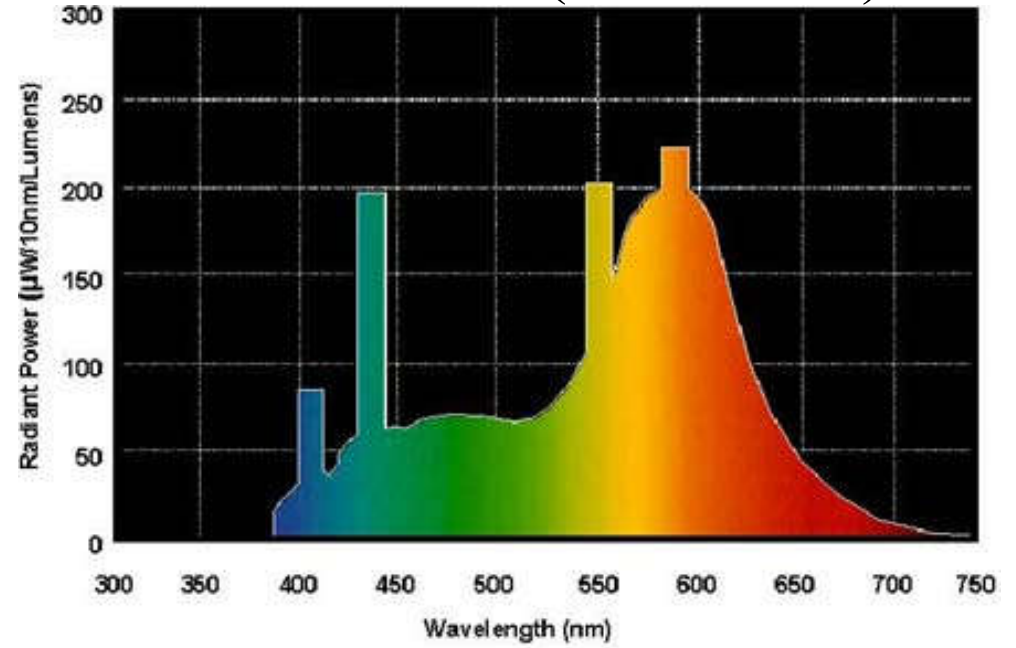

HID (clear mercury)

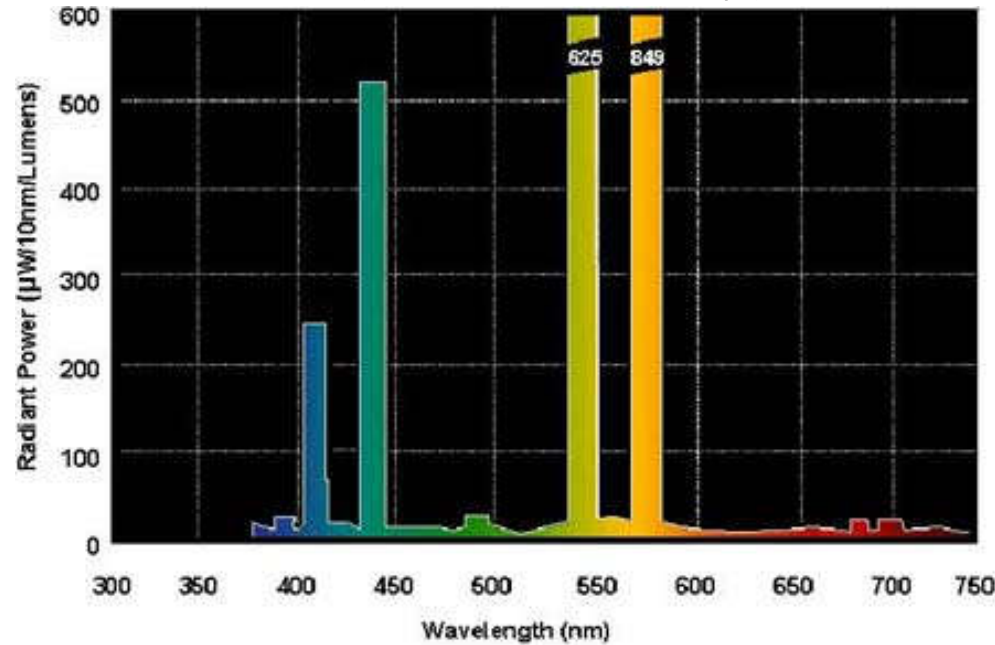

HID (low pressure sodium)

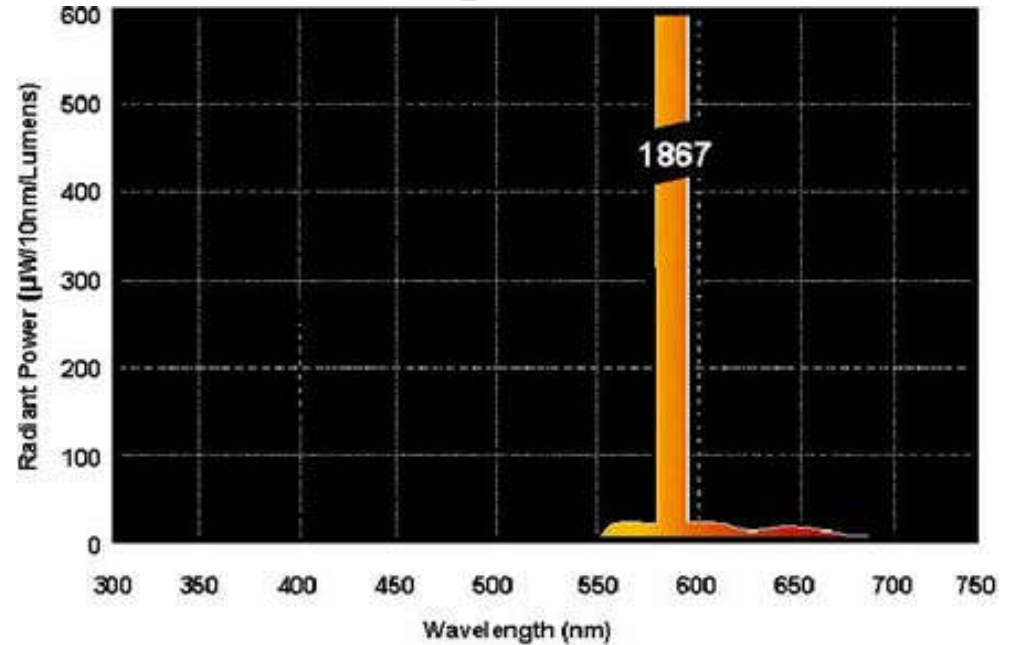

Spectral power distribution (Source: GE Lighting)